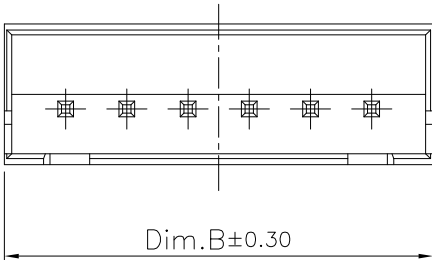
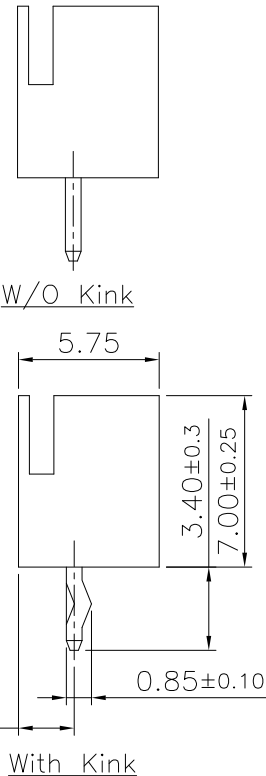

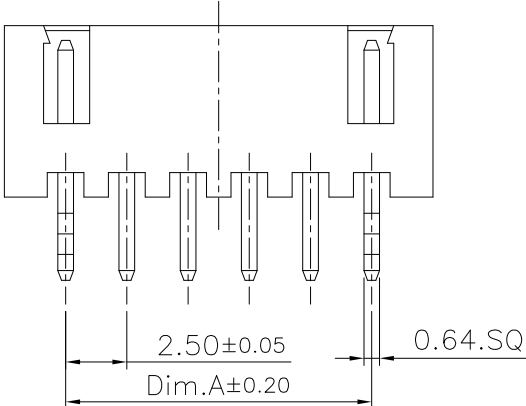
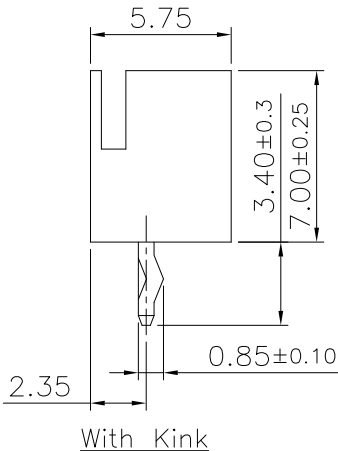
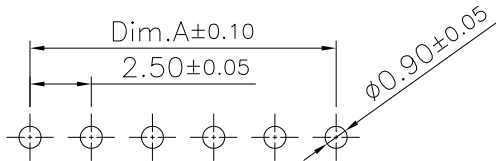



1				2				3				4				5																																																																											
																Specifications: Current Rating:3.0A AC,DC Voltage Rating:250V AC,DC Contact Resistance:10mohm Max  Insulation Resistance:1000Mohm Min. Withstanding Voltage:1000V AC/minute Operating Temperature Range:−25°C~+85°C  								A																																																																			
																Material And Finish: Insulator:Nylon 66 (UL94V-0) Insulator Color:White or Black Contact:Brass Plated:Tin Plated How To Order: 2317SJ-XX-XX-XX  Blank White BK:Black RD:Red  Blank With Kink(2~12P) K0:W/O Kink(2~16、20P) No. Of Contacts Straight Type								B																																																																			
 Dimension: <table><tr><th>POS.</th><th>Dim.A</th><th>Dim.B</th><th>POS.</th><th>Dim.A</th><th>Dim.B</th><th>POS.</th><th>Dim.A</th><th>Dim.B</th></tr><tr><td>2</td><td>2.50</td><td>7.50</td><td>9</td><td>20.00</td><td>25.00</td><td>16</td><td>37.50</td><td>42.50</td></tr><tr><td>3</td><td>5.00</td><td>10.00</td><td>10</td><td>22.50</td><td>27.50</td><td>20</td><td>47.50</td><td>52.50</td></tr><tr><td>4</td><td>7.50</td><td>12.50</td><td>11</td><td>25.00</td><td>30.00</td><td></td><td></td><td></td></tr><tr><td>5</td><td>10.00</td><td>15.00</td><td>12</td><td>27.50</td><td>32.50</td><td></td><td></td><td></td></tr><tr><td>6</td><td>12.50</td><td>17.50</td><td>13</td><td>30.00</td><td>35.00</td><td></td><td></td><td></td></tr><tr><td>7</td><td>15.00</td><td>20.00</td><td>14</td><td>32.50</td><td>37.50</td><td></td><td></td><td></td></tr><tr><td>8</td><td>17.50</td><td>22.50</td><td>15</td><td>35.00</td><td>40.00</td><td></td><td></td><td></td></tr></table>								POS.	Dim.A	Dim.B	POS.	Dim.A	Dim.B	POS.	Dim.A	Dim.B	2	2.50	7.50	9	20.00	25.00	16	37.50	42.50	3	5.00	10.00	10	22.50	27.50	20	47.50	52.50	4	7.50	12.50	11	25.00	30.00				5	10.00	15.00	12	27.50	32.50				6	12.50	17.50	13	30.00	35.00				7	15.00	20.00	14	32.50	37.50				8	17.50	22.50	15	35.00	40.00												C			
POS.	Dim.A	Dim.B	POS.	Dim.A	Dim.B	POS.	Dim.A	Dim.B																																																																																			
2	2.50	7.50	9	20.00	25.00	16	37.50	42.50																																																																																			
3	5.00	10.00	10	22.50	27.50	20	47.50	52.50																																																																																			
4	7.50	12.50	11	25.00	30.00																																																																																						
5	10.00	15.00	12	27.50	32.50																																																																																						
6	12.50	17.50	13	30.00	35.00																																																																																						
7	15.00	20.00	14	32.50	37.50																																																																																						
8	17.50	22.50	15	35.00	40.00																																																																																						
																P.C.B Layout				RoHS Compliant																																																																							
F				DRAWN:				GENERAL TOLERANCE:				 Neltron Industrial Co., Ltd.								SIZE																																																																							
E	01-Dec-2021	Add RD Options	Lisy	ZHW				.X=±0.20 .XX=±0.15																																																																																			
D	07-Jan-2020	Add K0 Type	Romina	CHECKED:				UNIT: MM				DESCRIPTION: 2.50mm Wire To Board Wafer Straight Type																																																																															
C	06-May-2014	ECN-TW1404004	Cherry	JEREMY				SCALE: 1:1																																																																																			
B	22-JUL-2010	ECN-TW100706	Allen	APPROVAL:				SHEET: 1/1				PART NO: 2317SJ-XX-XX-XX																																																																															
A	17-MAY-2006	(P0257)	ZHW	MIKE				PROJECTION: 																																																																																			
REV	DATE	FILE	BY													D																																																																											