

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	NOV. 18'08





■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 7A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 20m Ω max

■ WAFER

- Poles : 2 - 14
- Material : Contact : Brass, Tin Plated
Base : Nylon 66 UL94V-2
- Q' ty : 1,000 pcs./Bag

Poles	Dimensions(mm)	
	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44

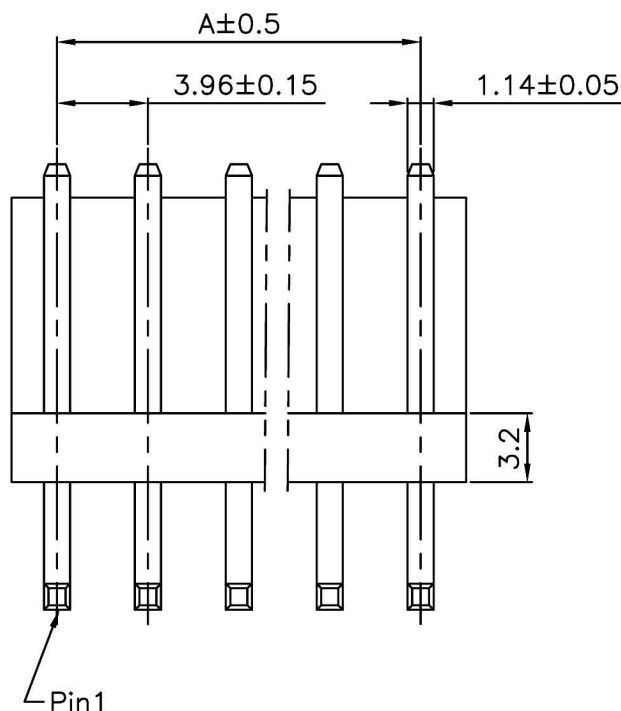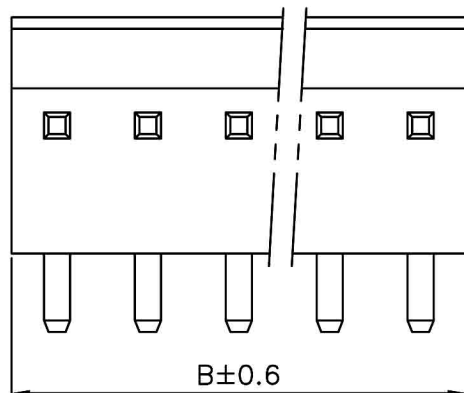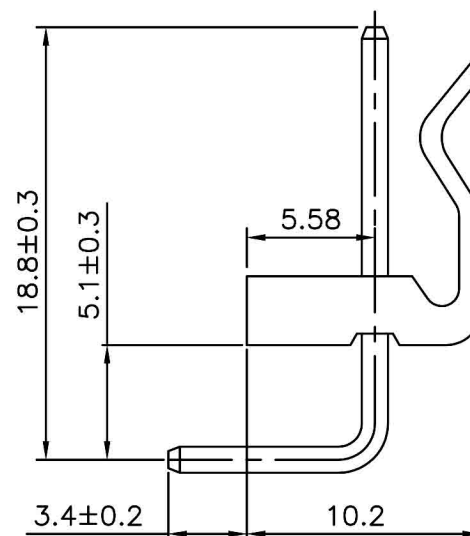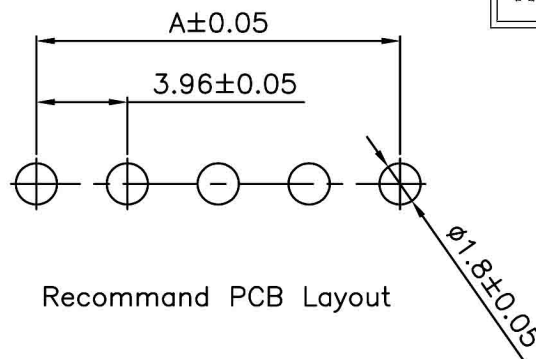

Note:

V=pull out the no. pin.

(拔第 *PIN , 第 1PIN 如圖所示)

TOLERANCE UNLESS
OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ±	X° ±
.X ± 0.30	.X° ±
.XX ± 0.20	.XX° ±
.XXX±	.XXX° ±
APPD	
CHKD	
DRAW	Z
	NOV. 18'2008

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
3.96mm Wafer Conn.

CPART NO.

PART NO.
2400**RT (-*V)/RH

CAD NO.
F:\PDF\HW\HW-A0002

SHEET
1 OF 1

圖面編號:GTKSD0873-B(1)