
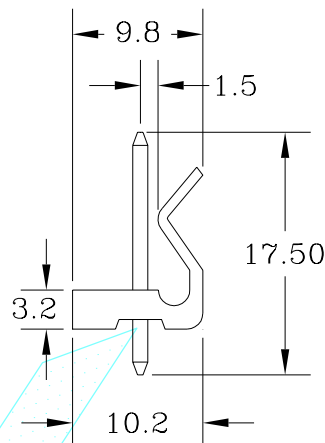
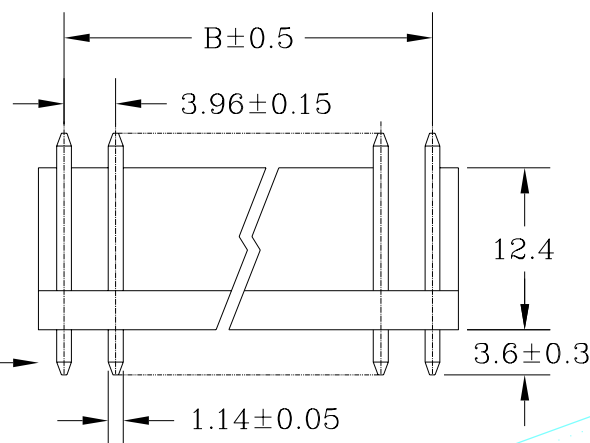


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JAN.10.02

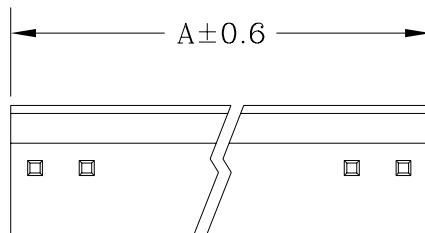

SPECIFICATION

- *Poles: 2-20
- *Voltage rating: 250V AC, DC
- *Current Rating: 7A, AC, DC
- *Withstand voltage: 1500V AC/minute
- *Insulation resistance: 1000MΩ min
- *Temperature range: -25°C ~ +85°C
(Including temperature rise in applying electrical current)
- *Applicable PC board thickness: .063"(1.6mm)
- Contact resistance: Initial Value/10mΩ max
After environmental testing/20mΩ max

WAFER

- *Part No: 2400**ST (2400**ST-*V)
- *Poles: 2-20
- *Material: Contact: Brass,Tin plated
Base: Nylon 66,UL 94V-2 or94V-0
- *Q'ty 500, 1000pcs/bag

POLES	A	B	POLES	A	B
02	7.92	3.96	12	47.52	43.56
03	11.88	7.92	13	51.48	47.52
04	15.84	11.88	14	55.44	51.48
05	19.80	15.84	15	59.40	55.44
06	23.76	19.80	16	63.36	59.40
07	27.72	23.76	17	67.32	63.36
08	31.68	27.72	18	71.28	67.32
09	35.64	31.68	19	75.24	71.28
10	39.60	35.64	20	79.20	75.24
11	43.56	39.60			

NOTE:

PART_NO:2500**ST-5V PULL OUT NO. 5 PIN
PART_NO:2500**ST-5V 為拔第5PIN,PIN1如圖所示

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE		TITLE	PART NO.
X. ±	X°. ±		WAFFER 180°	2400**ST (2400**ST-*V)
.X ± 0.3	.X° ±		PITCH:3.96MM	CAD NO. 1056
.XX ±	.XX° ±		IPART NO	SHEET
.XXX±	.XXX°±	SCALE		F:\Drw\HW-A\HW-A0001 1 OF 1
APPD		SIZE	JS-4001	
CHKD		A4		
DRAW	Tao.Tao. JAN.10.2002		圖面編號:GTKSD0872-A(1)	