

REV.	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JAN.09.01

SPECIFICATIONS

Voltage rating: 250V AC,DC

Curret rating: 7A,AC,DC

Withstand voltage: 1500V AC/minue

Insulation resistance: 1000mΩ min.

Temperature range: -25°C~+85°C

Applicable PC board thickness: 1.6mm

Contact resistance: Initial Value/10mΩ max.

After environmental

testing/20mΩ max

HOUSING

Material: myion 66,UL 94V-2 OR 94V-0

TERMINAL

Applicable wires: AWG #18-24





Material: brass

Finish: tin/plated

Position	2 Thru 20
Dimension	
A	3.96*Position No.
B	3.96*Position No.-3.96

Part No	Dimension	
	B	A
241002	3.96	8.56
241003	7.92	12.52
241004	11.88	16.48
241005	15.84	20.44
241006	19.80	24.40
241007	23.76	28.36
241008	27.72	32.32
241009	31.68	36.28
241010	35.64	40.24

Part No	Dimension	
	B	A
241011	39.60	44.20
241012	43.56	48.12
241013	47.52	52.12
241014	51.48	56.08
241015	55.44	60.04
241016	59.40	64.00
241017	63.36	67.96
241018	67.32	71.92
241019	71.28	75.88
241020	75.24	79.84

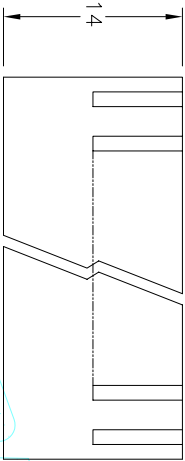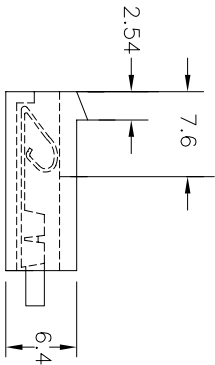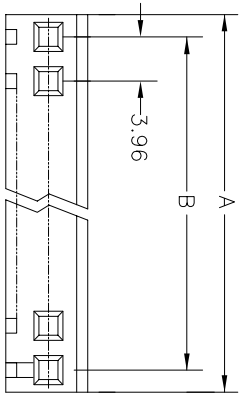

TOLERANCE UNLESS OTHERWISE SPECIFIED	PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
		PART NO.	2410**

LINER	ANGLE	UNITS	TITLE	PART NO.	CAD NO.	SHEET
X. ±	X°. ±	MM			F:\Drtw\SOC\SOC-0031	1 OF 1
.X. ±	.X°. ±					
.XX ±	.XX°. ±	SCALE	CPART NO.			
.XXX ±	.XXX°. ±					
APPD						
CHMD		SIZE				
DRAW	J. C. C	A4				
	JAN. 09. 2001					

GTK PART NO:2410T(G)
Terminal for 18 to 24 AWG Wire

圖面編號:GTKSD0607-A(1)