





1

2

3

4

5

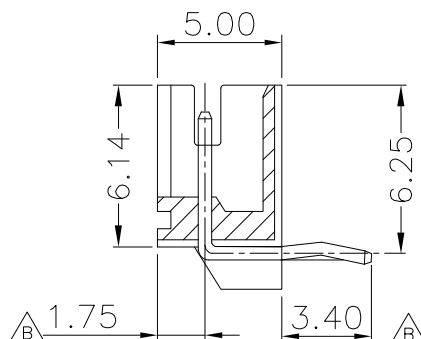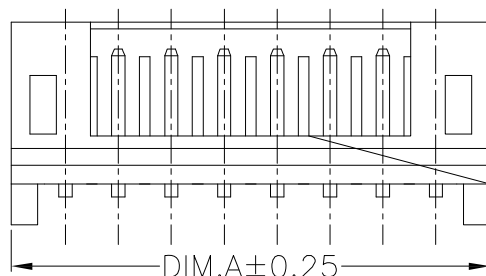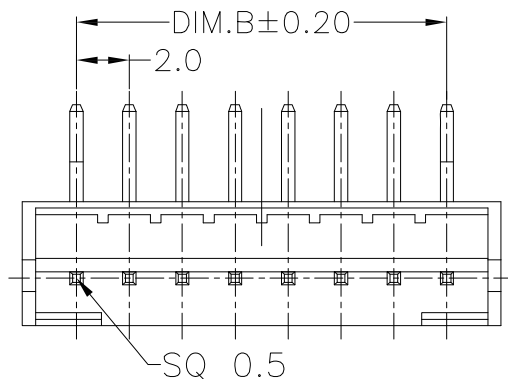

Specifications:

Current Rating: 2.0A AC, DC

Voltage rating: 100V AC, DC $\triangle B$

Contact Resistance: 20m Ohm Max

Insulation Resistance: 1000M Ohm Min

Withstanding Voltage: 800V AC/Minute

Temperature Range: -25°C To +85°C

Materials:

Insulator: Nylon 66 (UL 94V-0)

Contact: Copper Alloy


Finish: Tin Plated

How To Order

2417RJ-XX

No. Of Position
RJ: Right Angle

Pos	DIM.A	DIM.B	Pos	DIM.A	DIM.B	Pos	DIM.A	DIM.B
2	6.04	2.00	9	20.08	16.00	16	34.14	30.00
3	8.04	4.00	10	22.10	18.00			
4	10.04	6.00	11	24.10	20.00			
5	12.04	8.00	12	26.12	22.00			
6	14.06	10.00	13	28.12	24.00			
7	16.06	12.00	14	30.14	26.00			
8	18.08	14.00	15	32.14	28.00			

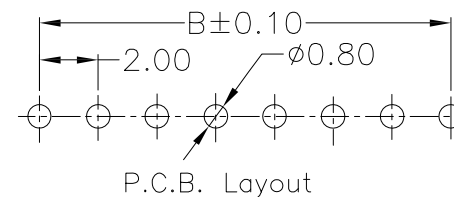

RoHS Compliant

G				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.		SIZE
E				Allen	X.X = ±0.30 $\triangle B$ X.XX = ±0.20			
D				CHECKED:	UNIT: MM	DESCRIPTION: 2.0mm Wafer Dip R/A Type		A4
C				Jerry Chen	SCALE:			
B	11-Jul-2014	ECN-TW1407004	Cherry	APPROVAL:	SHEET: 1 / 1	PART NO: 2417RJ-XX		
A	06-AUG-2008	(P0257)	Allen	Mike Wu	PROJECTION:			
REV	DATE	FILE	BY					