
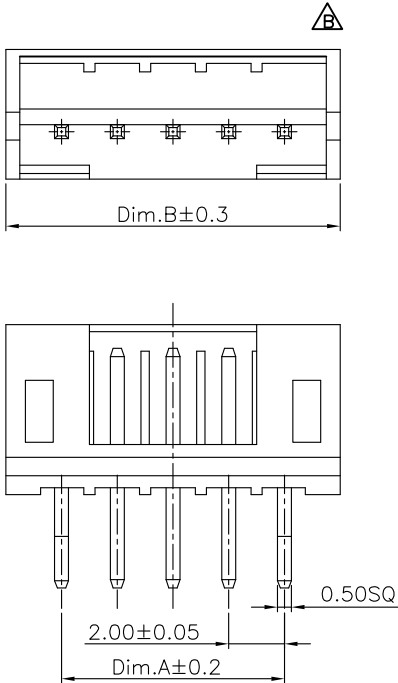


Specifications:
Current rating:2.0A AC,DC
Voltage rating:100V AC,DC
Contact resistance:20m ohm.Max
Insulation resistance:1000M ohm.Min
Withstanding voltage:800V AC/minute
Operating temperature range:−25°C~+85°C
Material:
Insulator:Nylon66 UL94V-0
Default color:White
Contact:Brass
Plated:Tin Plated
How To Order:
2417SJ-XX
Number of Circuits
SJ:Straight

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	2.00	6.10	10	18.00	22.10
03	4.00	8.10	11	20.00	24.10
04	6.00	10.10	12	22.00	26.10
05	8.00	12.10	13	24.00	28.10
06	10.00	14.10	14	26.00	30.10
07	12.00	16.10	15	28.00	32.10
08	14.00	18.10	16	30.00	34.10
09	16.00	20.10			

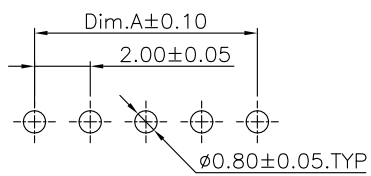

PCB LAYOUT

RoHS Compliant

				DRAWN: Jerry Chen	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	 Neltron Industrial Co., Ltd.		SIZE A4	
C	12-Jan-2023	Modify Specifictions	Jamie Chuang	CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: 2.00mm Wire to Board Wafer Straight Type			
B	07-Jul-2014	ECN-TW1407002	Cherry Wu		SCALE:1:1				
A	16-May-2006	(P0257)	Jerry Chen	APPROVAL: Mike Wu	SHEET: 1 / 1				PART NO: 2417SJ-XX
REV	DATE	FILE	BY		PROJECTION: 