

1

2

3

4

5

A

B

C

D

Specifications:

Current rating:2.0A AC,DC

Voltage rating:250V AC,DC

Contact resistance:20m ohm.Max

Insulation resistance:1000M ohm.Min


Withstanding voltage:500V AC/minute

Operating temperature range:-40°C~+85°C

Material and Finish

Insulator:Nylon 66 (UL94V-0)

Insulator Color:White

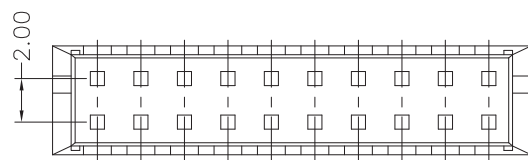

How To Order:

△△ 2418HJ2-XX-XX



Blank White

BK:Black

Number of Circuits

Double Rows

HJ:Housing

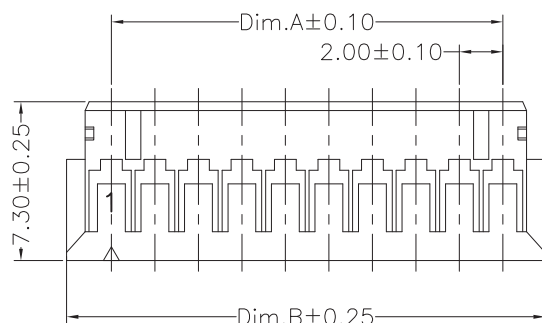

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
4	2.00	5.90	24	22.00	25.90
6	4.00	7.90	26	24.00	27.90
8	6.00	9.90	28	26.00	29.90
10	8.00	11.90	30	28.00	31.90
12	10.00	13.90	32	30.00	33.90
14	12.00	15.90	34	32.00	35.90
16	14.00	17.90	40	38.00	41.90
18	16.00	19.90			
20	18.00	21.90			
22	20.00	23.90			

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.		
				Allen	.X=±0.2 .XX=±0.15			
D	13-Sep-2022	Edit Spec.&Part No.	Ben	CHECKED:	UNIT: MM	DESCRIPTION: 2.0mm Double Row Housing & Terminal		SIZE A4
C	16-Apr-2020	合併包裝圖	Ben	Jerry Chen	SCALE:1:1			
B	30-Oct-2017	ECN-TW1710004	Jack Huang	APPROVAL:	SHEET: 1 / 2	PART NO:  2418HJ2-XX-XX		
A	04-NOV-2009		Allen	Mike Wu	PROJECTION: 			
REV	DATE	FILE	BY					