
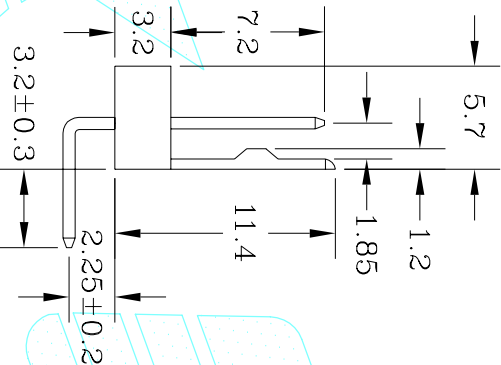
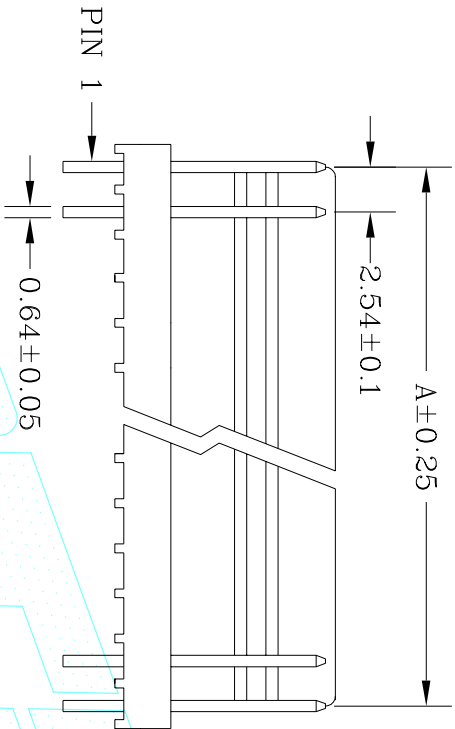


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JAN.10.02

SPECIFICATION

- *Poles: 2-20
 - *Voltage rating: 250V AC, DC
 - *Current Rating: 3A, AC, DC
 - *Withstand voltage: 1000V AC/minute
 - *Insulation resistance: 1000MΩ min
 - *Temperature range: -25°C ~ +85°C
(including temperature rise in applying electrical current)
 - *Applicable PC board thickness: .063"(1.6mm)
 - Contact resistance: Initial Value/10mΩ max
After environmental testing/20mΩ max
- WAFER
- *Part No: 2500**RT (2500**RT-*V)
 - *Poles: 2-20
 - *Material: Contact: Brass,Tin plated
Base: Nylon 66,UL 94V-2
 - *Q'ty 500, 1000pcs/bag

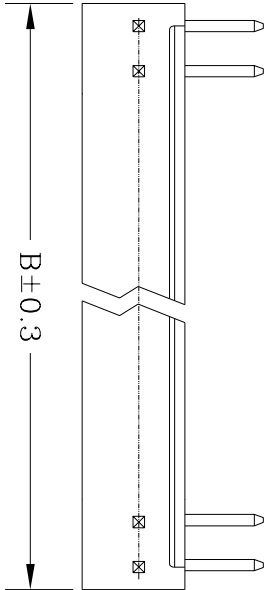

NOTE:
PART_NO:2500**RT-5V PULL OUT NO. 5 PIN
PART_NO:2500**RT-5V 為拔第5PIN,PIN1如圖所示

POLES	A	B	POLES	A	B
02	2.54	5.08	12	27.94	30.48
03	5.08	7.62	13	30.48	33.02
04	7.62	10.16	14	33.02	35.56
05	10.16	12.70	15	35.56	38.10
06	12.70	15.24	16	38.10	40.64
07	15.24	17.78	17	40.64	43.18
08	17.78	20.32	18	43.18	45.72
09	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.84
11	25.40	27.94			

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION		GOLD-TEK ELECTRIC CO., LTD.	
LINER	ANGLE	UNITS	TITLE	PART NO.	2500**RT (2500**RT-*V)
X. ±	X°. ±	MM	WAFER 90°	CAD NO.	1056
X. ± 0.3	X°. ±		PITCH:2.54MM	F:\Drw\HW\HW-A0005	1 OF 1
XX ±	XX° ±	SCALE	IPART NO		
.XXX±	.XXX±				
APPD		SIZE	JS-7001		
CHKD					
DRAW	Tao.Tao.	A4			

圖面編號:GTKSD0876-A(1)