
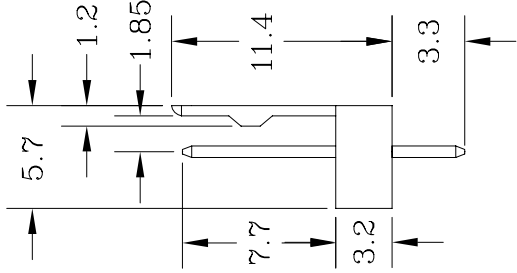
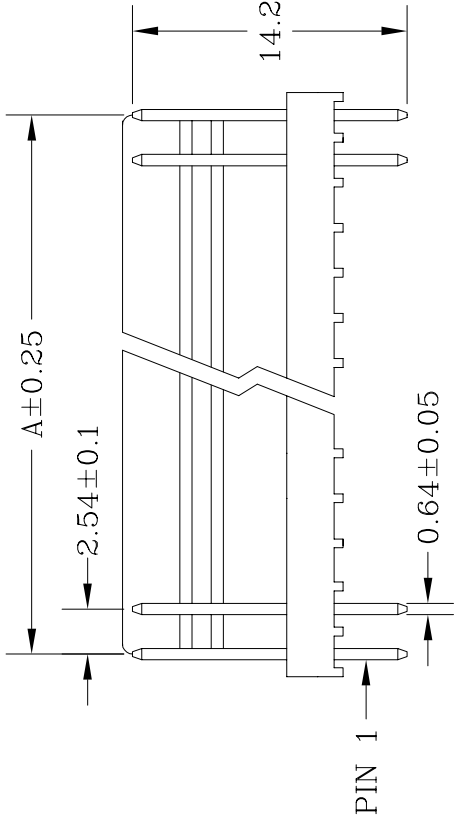


1		2		3		4		5	
REV		ECN NO.		DESCRIPTION		DATE			
A				RELEASE		JAN.10.02			

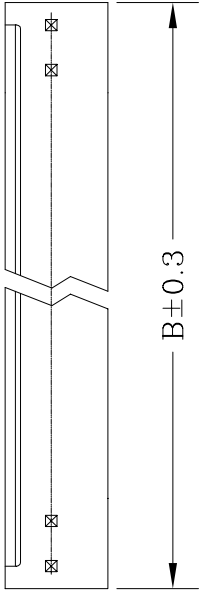

SPECIFICATION

- *Poles: 2-20
 - *Voltage rating: 250V AC, DC
 - *Current Rating: 3A, AC, DC
 - *Withstand voltage: 1000V AC/minute
 - *Insulation resistance: 1000MΩ min
 - *Temperature range: -25°C ~ +85°C
(Including temperature rise in applying electrical current)
 - *Applicable PC board thickness: .063"(1.6mm)
 - Contact resistance: Initial Value/10mΩ max
 - After environmental testing/20mΩ max
- ### WAFER
- *Part No: 2500**ST (2500**ST-*V)
 - *Poles: 2-20
 - *Material: Contact: Brass,Tin plated
Base: Nylon 66,UL 94V-2
 - *Q'ty 500, 1000pcs/bag

NOTE:
PART_NO:2500**ST-5V PULL OUT NO. 5 PIN
PART_NO:2500**ST-5V 為拔第5PIN,PIN1如圖所示

POLES	A	B	POLES	A	B
02	2.54	5.08	12	27.94	30.48
03	5.08	7.62	13	30.48	33.02
04	7.62	10.16	14	33.02	35.56
05	10.16	12.70	15	35.56	38.10
06	12.70	15.24	16	38.10	40.64
07	15.24	17.78	17	40.64	43.18
08	17.78	20.32	18	43.18	45.72
09	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.84
11	25.40	27.94			



GOLD-TEK

ELECTRIC CO., LTD.

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION		TITLE		PART NO.	
LINEAR	ANGLE	UNITS		WAFFER 180° PITCH:2.54MM		2500**ST (2500**ST-*V)	
X° ±	X° ±	MM				CAD NO. 1056	SHEET
X° ± 0.3	X° ±					F:\Drw\HW-A\HW-A0004	1 OF 1
XX° ±	XX° ±	SCALE					
.XXX±	.XXX±						
APPD		SIZE					
CHKD		A4					
DRAW	Tao.Tao.	JAN.10.2002					
JS-6001							

圖面編號:GTKSD0875-A(1)