


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	MAY. 12' 03

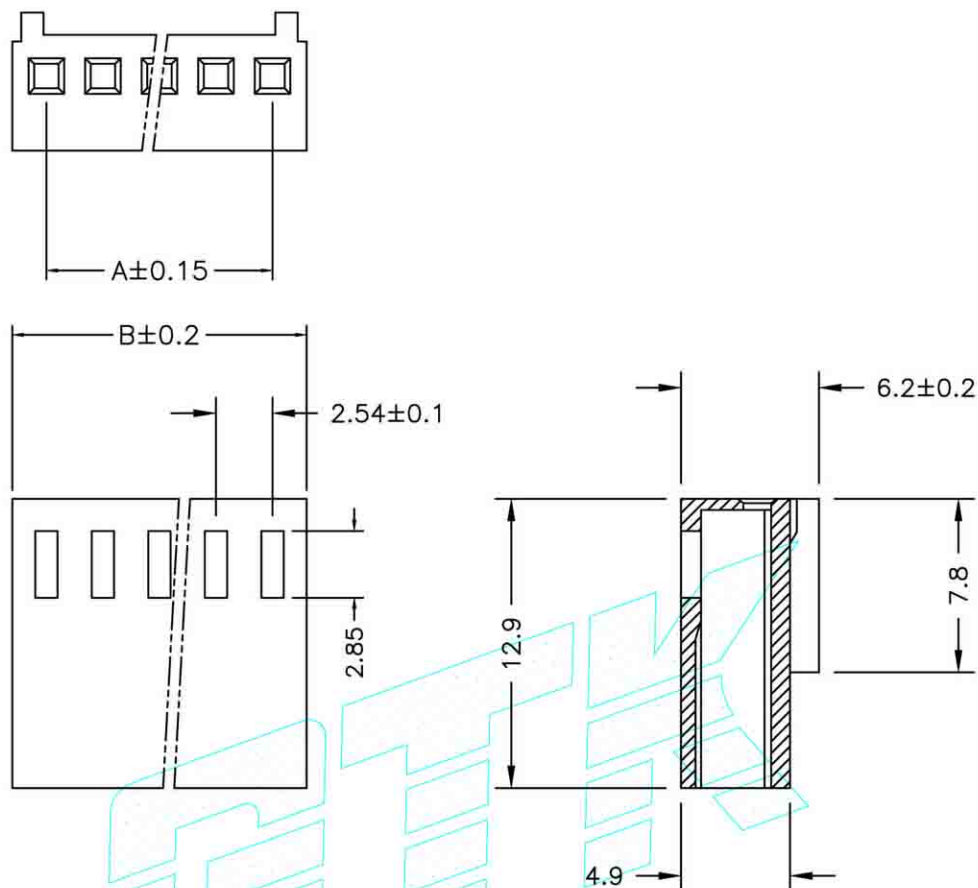

SPECIFICATIONS

- Poles: 2-20
- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩmin
- Temperature range: -25℃~+85℃
- Applicable PC board thickness: .063" (1.6mm)
- Contact resistance: Initial Value/10mΩ max
After environmental testing/20mΩ max

HOUSING

- Poles: 2-20
- Material: Contact: Brass, Tin plated
Base: Nylon 66 UL94V-2
- Q ty: 500,1000pcs/bag

NO.	PART NO.	DIMENSION(mm)	
		A	B
11	251011	25.40	28.46
12	251012	27.94	31.00
13	251013	30.48	33.54
14	251014	33.02	36.08
15	251015	35.56	38.62
16	251016	38.10	41.16
17	251017	40.64	43.70
18	251018	43.18	46.24
19	251019	45.72	48.78
20	251020	48.26	50.32

NO.	PART NO.	DIMENSION (mm)	
		A	B
2	251002	2.54	5.60
3	251003	5.08	8.14
4	251004	7.62	10.68
5	251005	10.16	13.22
6	251006	12.70	15.76
7	251007	15.24	18.30
8	251008	17.78	20.84
9	251009	20.32	23.38
10	251010	22.86	25.92

TOLERANCE UNLESS
OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ±	X° ±
.X ±	.X° ±
.XX ±	.XX° ±
.XXX±	.XXX° ±

APPD
CHKD
DRAW Z. MAY.13.2003

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE

CPART NO.

PART NO. 2510**

CAD NO.
F:\Drw\HW\HW-0020

SHEET
1 OF 1

圖面編號:GTKSD0007-A(1)