

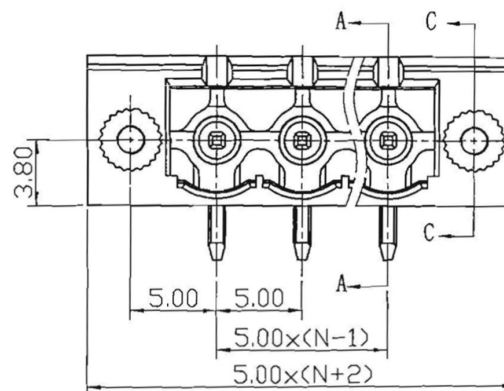
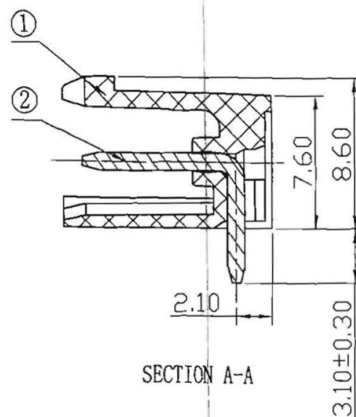

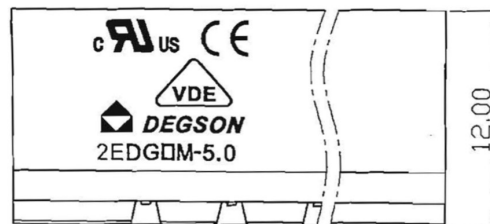


PCB Lay out:

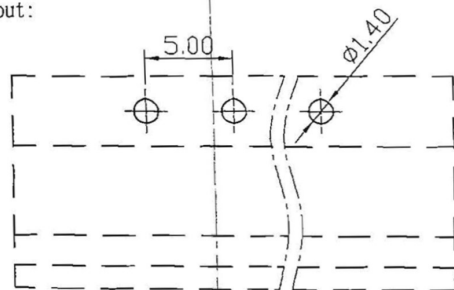

Notes:

- Pitch: 5.00mm, poles: 2-22P
- Rated voltage/current: UL 300V/15A
VDE 320V/20A
- Withstanding voltage: AC2500V/1Min
- Insulation resistance: 5000MΩ/DC1000V
- Operation temperatures: -40°C~+105°C
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to	over	to	to	over	over	over		
6	6	10	30	60	100	150		
to 6	to 10	to 24	to 30	to 60	to 100	to 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/0.10

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

3	2EDG Screw Cap	S000001040 (H)	2	Brass	
2	2EDGRC-13A Pin header	1008B00150 (H)	XX	COPPER	2-24P Manual assembly
1	2EDGV/RM-5.0-100A Housing	1021A0YXXM (H)	1	PA66	UL94V-0 B
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
MM (INCH) TOLERANCES EXCEPT AS NOTED 0 ± .00 ± .000 ± ANGLES ± 1° THIRD ANGLE PROJECTION DFTD COCO CHKD APPLV DATE DATE DATE DATE DATE 11/16/11 DATE DATE DATE DATE DATE					
DEGSON NAME 2EDGRM-5.0-XXP-1Y-100A (H) DRAWING NO. 2EDGRM-5.0-E06 /PART NO. DO NOT SCALE DRAWING 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD SIZE A3 REV TO 05/08/12 SHEET 1 OF 1					

