
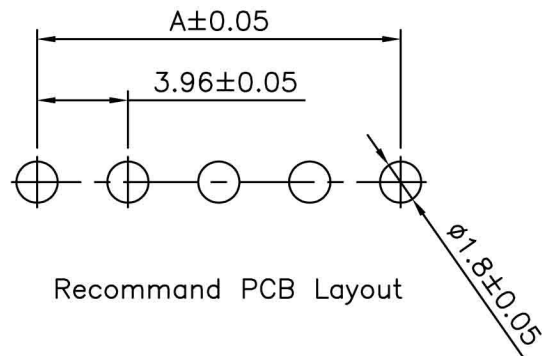
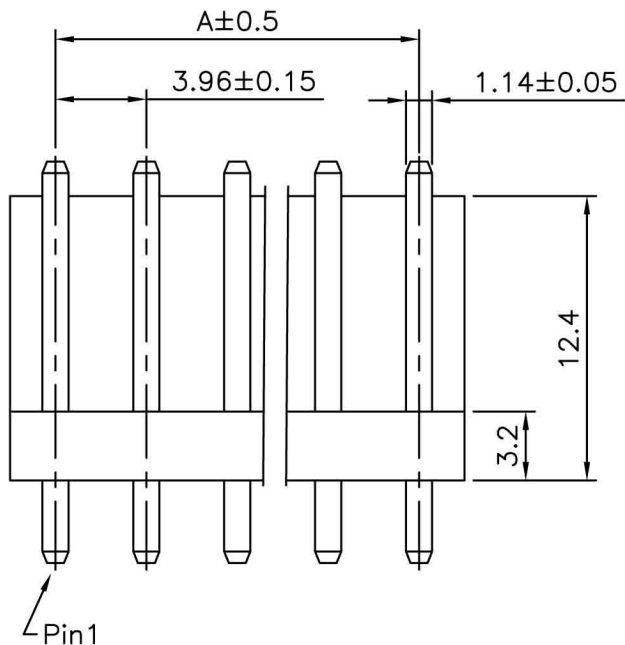


A

B

C

D

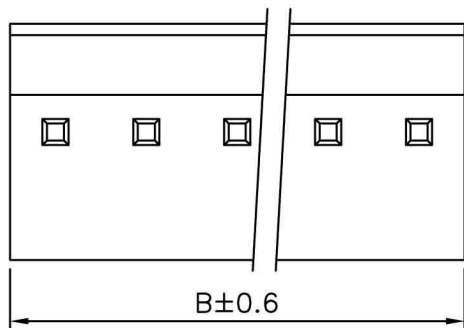

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JAN. 10'02
B		ADD. RoHS	MAY. 16'08
C		REDRAW	NOV. 18'08
D		MODIFY P/N	DEC. 09'10

SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 7A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000MΩ min
- Temperature Range : - 25℃ to + 85℃
- Contact Resistance : 20mΩ max

WAFER

- Poles : 2 - 14
- Material : Contact : Brass, Tin Plated
Base : Nylon 66 UL94V-2
- Q' ty : 1,000 pcs./Bag

Poles	Dimensions(mm)	
	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44

NOTE:

V=Pull out the no. pin
(拔第 *PIN , PIN NO. 1 如圖所示)

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE		UNITS	TITLE	PART NO.
X. ±	X° ±		MM	3.96mm Wafer	4001**ST(-*V)
.X ± 0.30	.X° ±				CAD NO. 1056
.XX ± 0.20	.XX° ±				SHEET
.XXX±	.XXX° ±		SCALE	CPART NO.	F:\PDF\HW\HW-A0001
APPD			SIZE		1 OF 1
CHKD			A4		圖面編號:GTKSD0872-D(1)
DRAW	Z	DEC. 09'2010			