

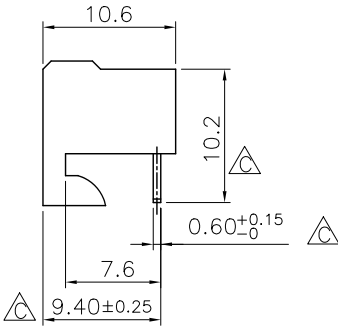
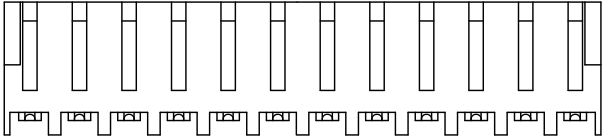


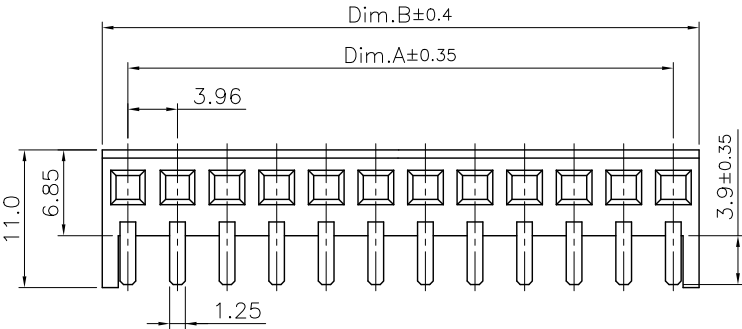

With Hook




WithOut Hook

Specifications:
Current rating: 5.0A AC/DC
Voltage rating: 250V AC/DC
Contact resistance: 10m ohm. max.
Insulation resistance: 1500M ohm. Min.
Withstanding voltage: 1500V AC for one minute
Operating temperature rating: 0°C to + 75°C

Material and Finish:
Insulator: Thermoplastic (UL94V-2)
Contact: Brass
Plating: Bright Tin Plated

How To Order
41815R-XX-XX
Blank With Hook
01:WithOut Hook
No. of Contacts
Right Angle

Pin	Dim.A	Dim.B	Pin	Dim.A	Dim.B
2	3.96	8.06	10	35.64	39.74
3	7.92	12.02	11	39.60	43.70
4	11.88	15.98	12	43.56	47.66
5	15.84	19.94	13	47.52	51.62
6	19.80	23.90	14	51.48	55.58
7	23.76	27.86	15	55.44	59.54
8	27.72	31.82	16	59.40	63.50
9	31.68	35.78			

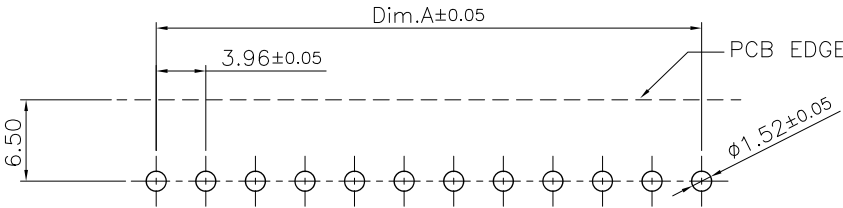

P.C.B Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	Neltron Connectors Neltron Industrial Co., Ltd.	
E				Allen	.X=±0.35 .XX=±0.10		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C	08-MAR-2024		Lisy	Jerry Chen	SCALE:	3.96mm PCB Connector R/A Type	A4
B	17-FEB-2009	ECN-CN090222	Richie	APPROVAL:	SHEET: 1/2	PART NO:	
A	14-AUG-2008	(P0130)	Allen	Mike Wu	PROJECTION:	41815R-XX-XX	
REV	DATE	FILE	BY				