



1

2



3

4

5



Section A-A

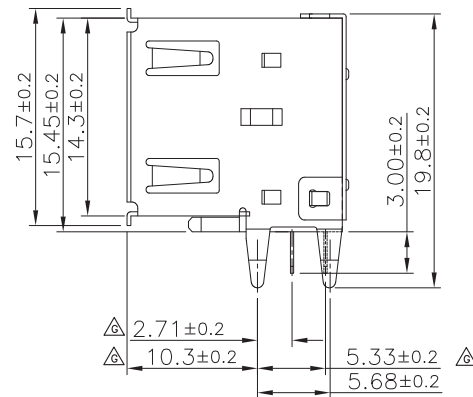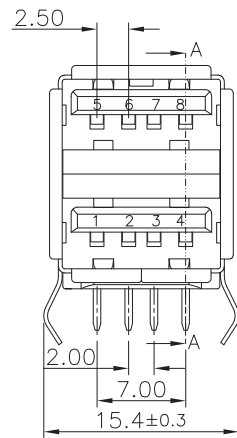

Specifications:

Current Rating:1.0A AC/DC


Voltage Rating:30V AC/DC

Contact Resistance:30m ohm. Max.

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:0°C ~ +40°C



Material and Finish

Insulator:PBT (UL94V-0)

Contact:Phosphor Bronze

Plating:Gold Plated on Contact Area,
Tin Plated on Solder Tail.

Shell:Brass,Nickel Plated

Back Cover:SPCC, Matte Nickel Plated

How To Order

5075AR-08B-XX-XX ▲

Standard Selective Gold Plated

15:Gold Plated 15u"


30:Gold Plated 30u"

WH:White(Standard)

BK:Black

No. of Contacts

Type A R/A

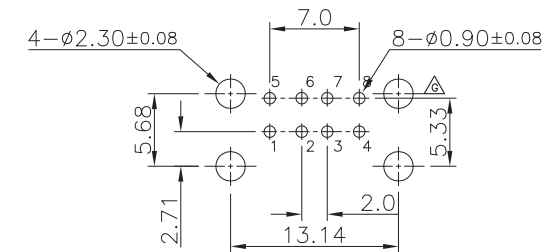

P.C.B. Layout

RoHS Compliant

J				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
I				Hai Shan Zhou	.X=±0.20 .XX=±0.15		
H	14-Apr-2020	Edit P/N	Romina	CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
G	02-Jul-2013	Add Packing	Andrew	Jeremy Liu	SCALE: 1:1	Double USB A Socket Right Angle Type	A4
F	01-Jun-2011		Zhou Lin	APPROVAL:	SHEET: 1/2	PART NO:	
E	03-May-2011		Zhou Lin	Mike Wu	PROJECTION:	5075AR-08B-XX-XX ▲	
REV	DATE	FILE	BY				



A

B

C

D