

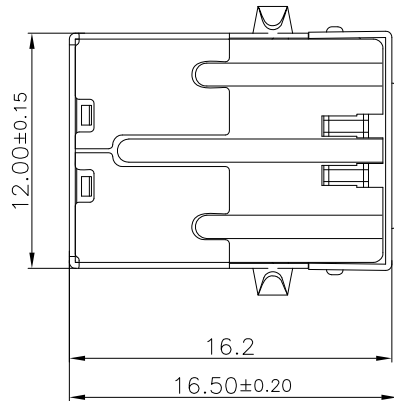
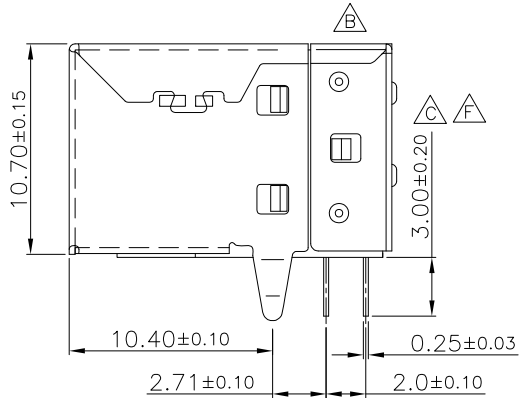


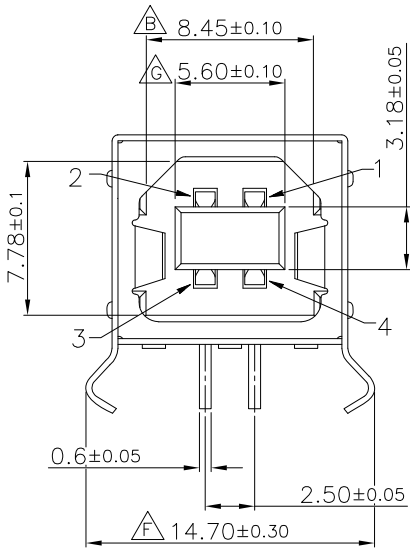


Specifications:
 Current Rating:1.5A AC/DC $\triangle B$
 Voltage Rating:30V AC/DC
 Contact Resistance:30m ohm. Max.
 Insulation Resistance:1,000M ohm. min.
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Range:-50°C ~ +85°C




Material and Finish
 Insulator:PBT or Nylon 9T or LCP (UL94V-0) $\triangle F$ $\triangle G$
 Contact:Phosphor Bronze
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell:Brass,Nickel Plated
 Back Cover:SPCC, Matte Nickel Plated

How To Order
 5075BR-04-XX-XX-XX
 Blank PBT
 F5:Nylon 9T $\triangle F$
 F7:LCP $\triangle G$
 Standard Selective Plated
 15:Selective Gold Plated 15u"
 30:Selective Gold Plated 30u"
 BK:Black
 WH:White

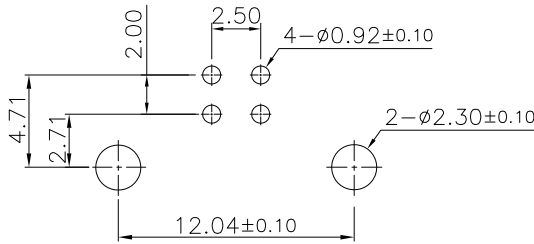

P.C.B Layout

RoHS Compliant

K				DRAWN: Zhou	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		D
J								
I				CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: USB B Type PCB Socket Right Angle Type	SIZE A4	
H					SCALE: 1:1			
G	30-Dec-2020	Add LCP	Jamie Wang	APPROVAL: Mike Wu	SHEET: 1/2	PART NO: 5075BR-04-XX-XX-XX 		
A	13-Jul-2011	(PC0604)	Zhou		PROJECTION: 			
REV	DATE	FILE	BY					