SHELL: ABS RESIN, GREY, BLACK OR CHROM OLATING OVER NICKEL

LOCKING ASSEMBLY: STEEL OO ZINC-ALLOY DIE CASTING, CHROMATE TREATMANT AFTER ZINC PLATING.

How To Order

5507-XXX-TS

- TS: Long Screw
- C: G:Gray Color / B:Black Color / C:Chromate Clolr
- XXX: No. Of Postions

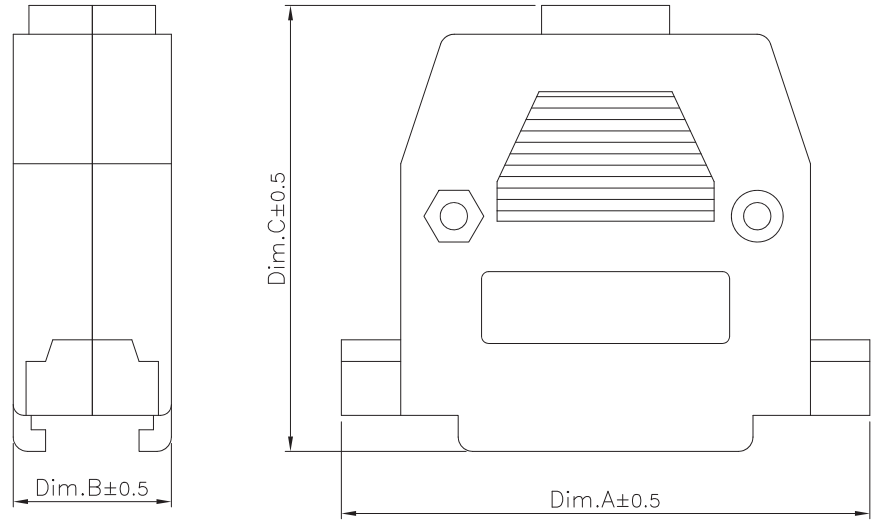

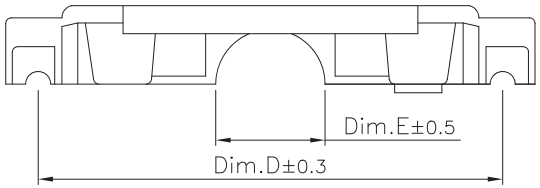



2 PCS



2 PCS



2 PCS



2 PCS



2 PCS

Circuits	Dim.A	Dim.B	Dim.C	Dim.D	Dim.E
9	30.5	16.0	41.0	25.0	7.15
15	40.0	16.2	37.4	33.3	9.9
23	50.2	16.2	41.7	44.2	10.1
25	55.0	16.5	44.5	47.0	10.7
37	69.5	20.0	53.0	63.5	14.0

D

B C D

RoHS Compliant

REV	DATE	FILE	BY
E			
D	22-Sep-2023		Lisy
C	28-Jun-2021		Jerry
B	07-May-2015	ECN-TW1505002	Miller Yu
A	15-JUL-2009		Allen

DRAWN: Lisy

CHECKED: Jerry Chen

APPROVAL: Rory Chen

GENERAL TOLERANCE: .X=±0.2 .XX=±0.15

UNIT: mm

SCALE:

SHEET: 1 / 1

PROJECTION:

Neltron Connectors **Neltron Industrial Co., Ltd.**

DESCRIPTION: D-SUB HOOD

PART NO: 5507-XXX-TS

SIZE **A4**