
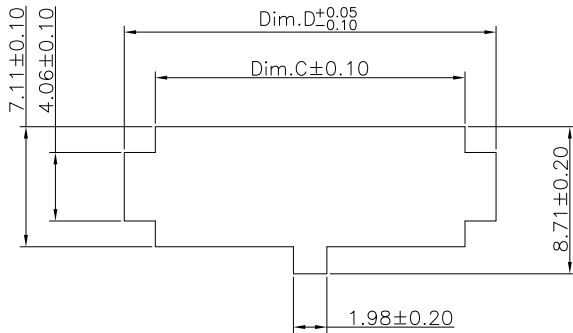
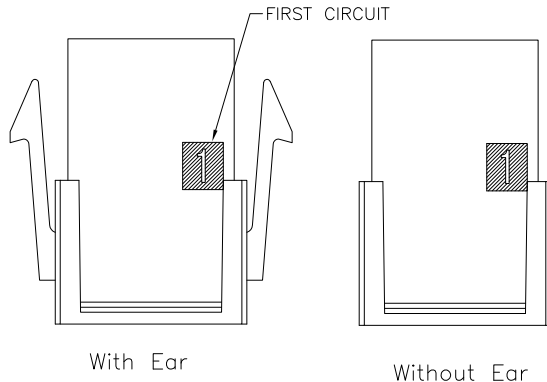
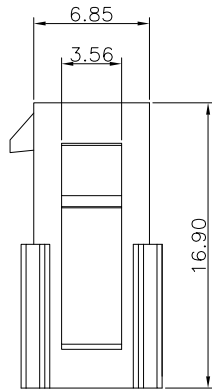
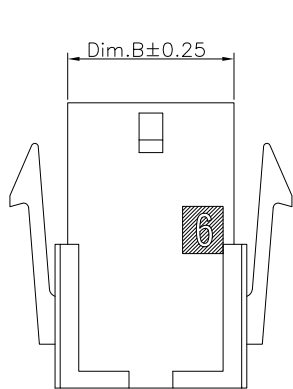


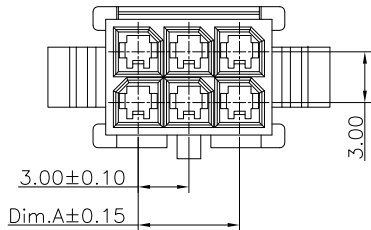

RECOMMENDED PANEL CUT-OUT
FOR WITH EAR TYPE

Specifications:
Current Rating:5.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10m ohm. Max.
Insulation Resistance:1,000M ohm. Min.
Withstanding Voltage:1,500V AC For One Minute
Operating Temperature Range:-25°C To +105°C

Material and Finish
Material:Nylon 66(UL94V-0)
Color:Black or Ivory


How to Order:
5561-XX-XX-XX
Blank Black
IV:Ivory
Blank With Ear
01:Without Ear
No. of Contacts

Dimension Information:

Circuits	Dim.A	Dim.B	Dim.C	Dim.D
2		3.85	4.21	7.90
4	3.00	6.85	7.21	10.90
6	6.00	9.85	10.21	13.89
8	9.00	12.85	13.21	16.89
10	12.00	15.85	16.21	19.89
12	15.00	18.85	19.21	22.89
14	18.00	21.82	22.21	25.88
16	21.00	24.85	25.21	28.88
18	24.00	27.85	28.21	31.88
20	27.00	30.85	31.21	34.87
22	30.00	33.85	34.21	37.87
24	33.00	36.85	37.21	40.87

RoHS Compliant

				DRAWN: Jerry Chen	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	Neltron Connectors Neltron Industrial Co., Ltd.	
				CHECKED:	UNIT: MM	DESCRIPTION: 3.0mm Power Plug Housing	
					SCALE:1:1		
C				APPROVAL:	SHEET: 1 / 2	PART NO: 5561-XX-XX-XX	
B					PROJECTION:		
A	19-Jun-2020	(P0001)	Jerry	Rory Chen		SIZE A4	
REV	DATE	FILE	BY				

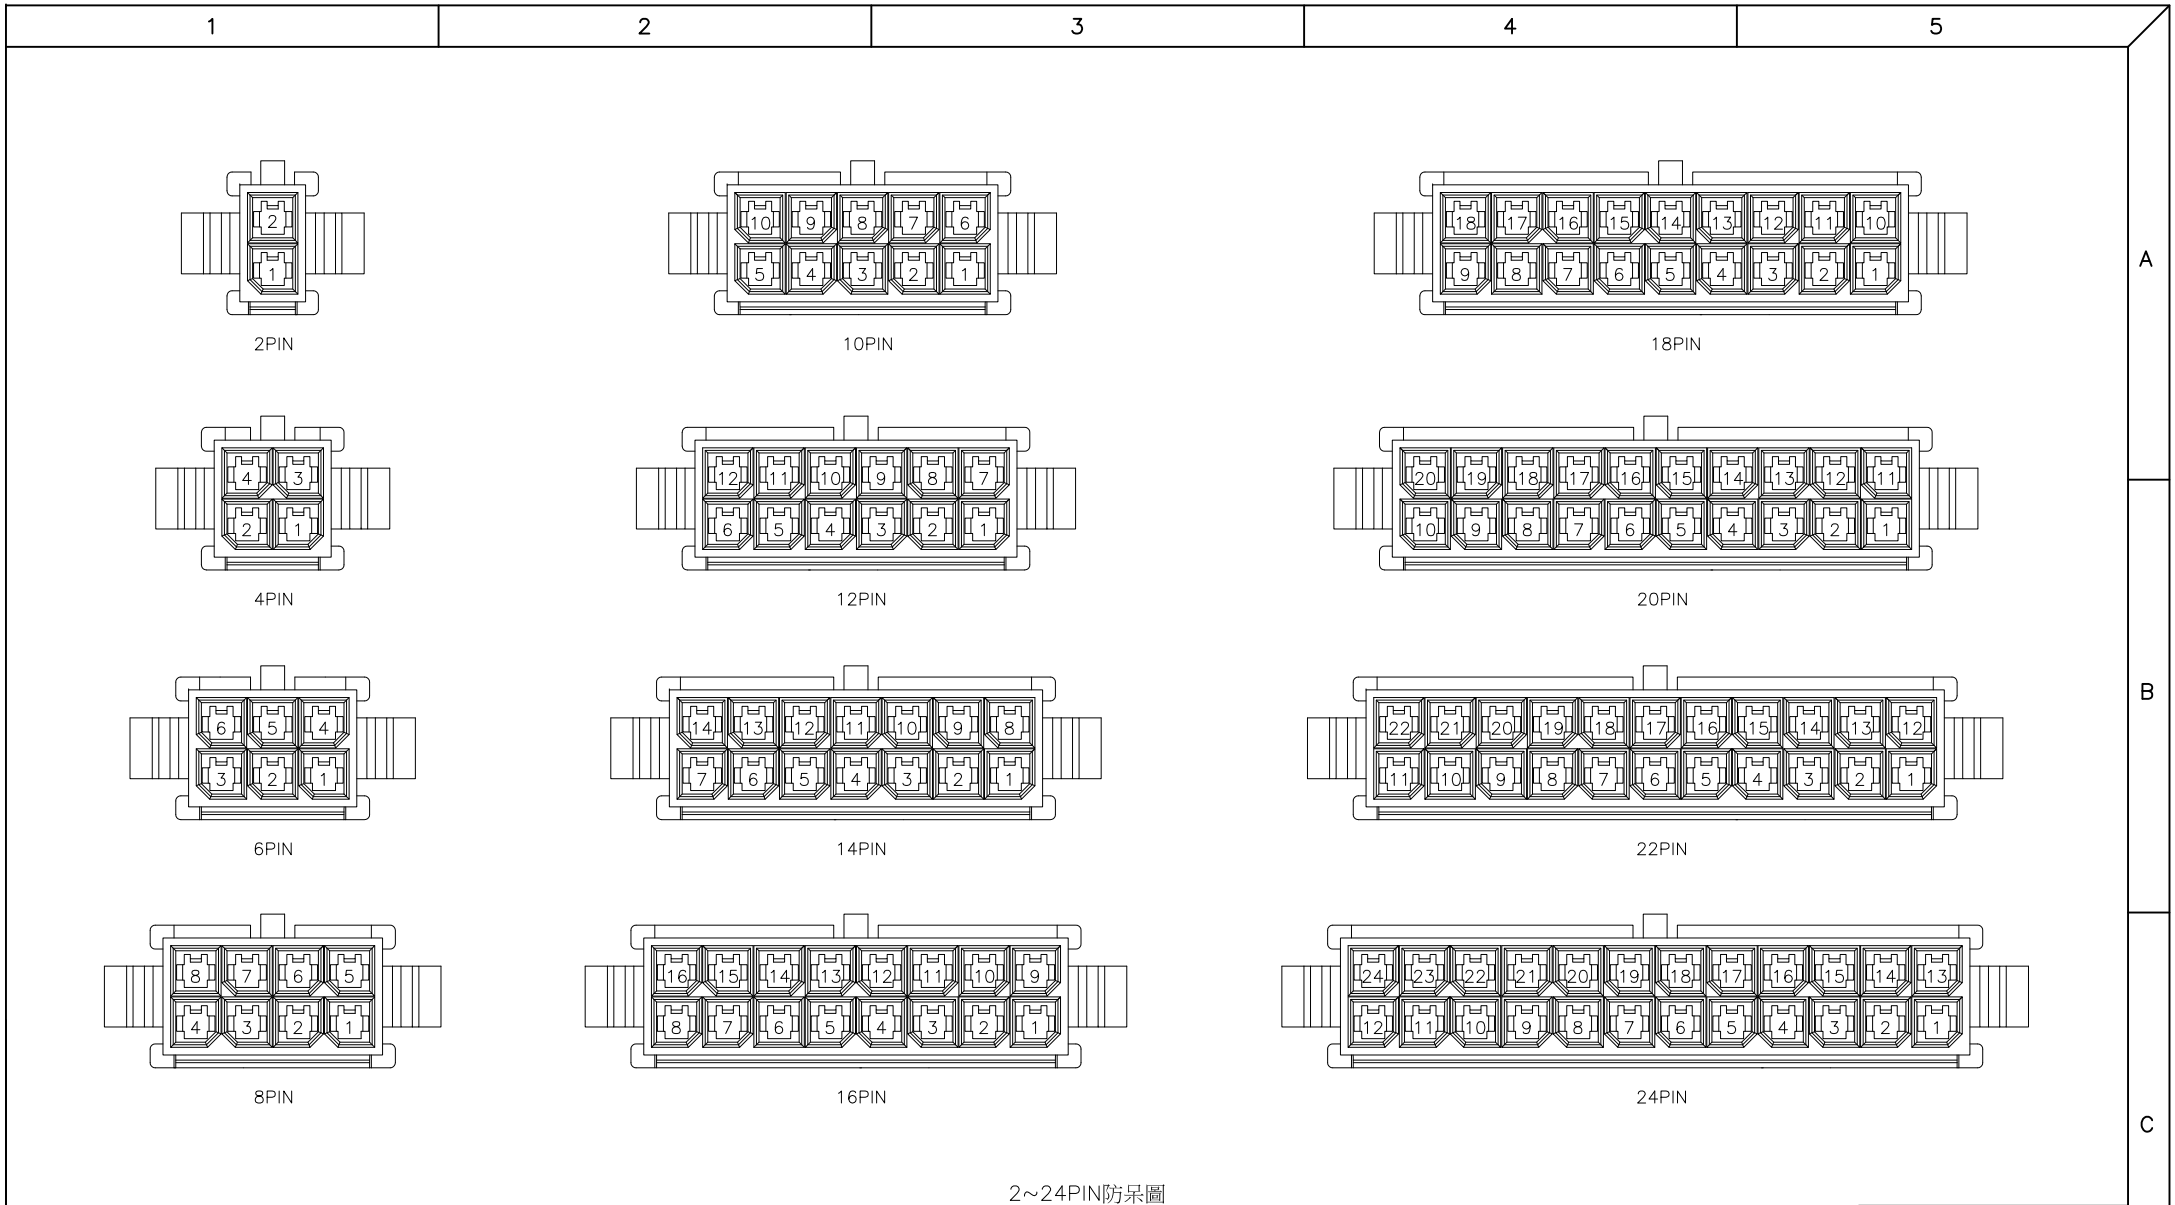

RoHS Compliant

				DRAWN: Jerry Chen	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		D
				CHECKED:	UNIT: MM	DESCRIPTION: 3.0mm Power Plug Housing	SIZE A4	
C					SCALE: 1:1			
B				APPROVAL:	SHEET: 2 / 2	PART NO: 5561-XX-XX-XX		
A	19-Jun-2020	(P0001)	Jerry					
REV	DATE	FILE	BY	Rory Chen	PROJECTION: 