


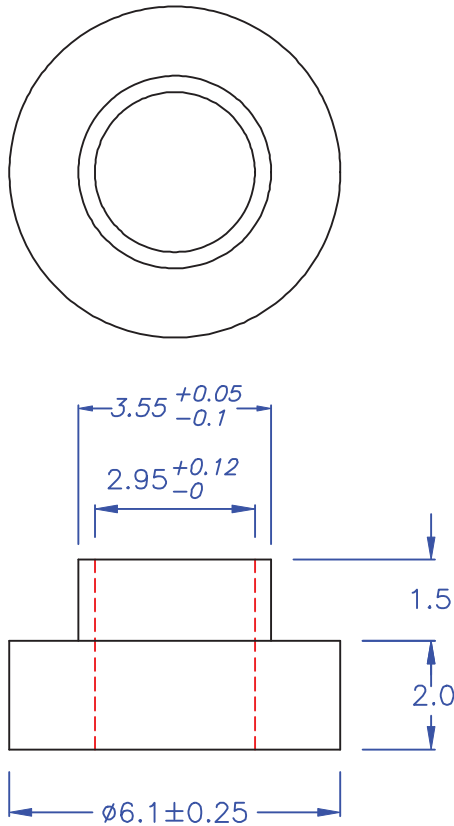

Component - Plastics

E41797

TORAY INDUSTRIES INC

NIHONBASHI-MITSUI TOWER, 1-1 NIHONBASHI-MUROMACHI 2-CHOME, CHUO-KU, TOKYO 103-8666 J.P

3004-V0(rg), CM3004-V0(rg)

Polyamide 66 (PA66), "AMILAN", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	0.25	V-0	-	-	-	-	-
	0.38	V-0	-	-	-	-	-
	0.66	V-0	4	0	130	105	105
	1.5	V-0	3	0	130	105	105
	3.0	V-0	2	0	130	105	105

Comparative Tracking Index (CTI): 0

Dielectric Strength (KV/mm): 28

High-Voltage Arc Tracking Rate (IVTR): 0

Dimensional Stability (%): 0.0

Inclined Plane Tracking (IPT): -

Volume Resistivity (10⁸ ohm-cm): 13

High Volt, Low Current Arc Resis (D495): 5



◎Halogen Free 低鹵

◎ROHS 2.0

◎ROHS 六項 compliant

DRAW NO. PGAS026118

GJS

TOLERANCE:

L ≤ 10	±0.2
10 < L ≤ 30	±0.3
30 < L ≤ 50	±0.5
50 < L ≤ 100	±0.7
100 < L ≤ 250	±1.2
ABOVE 250	±1.5

APPROVED BY

Jdy

2014.03.27.

REVIEWED BY

Jawb

2014.03.27.

DRAWN BY

Paggi

2014.03.27.

MATERIAL: N66 V0 or EQUIVALENT

COLOR: NATURAL



品固企業股份有限公司
品基電子(東莞)有限公司
蘇州品基電子科技有限公司
鑽隆有限公司
PINGOOD ENTERPRISE CO.,LTD.

PART NAME:

電晶體墊片

TRANSISTOR WASHER

PART NO:

603S-V0


A

SIZE

VERSION

4C

SHEET 1 OF 1



UNIT
mm

SCALE

表單號碼QF135