
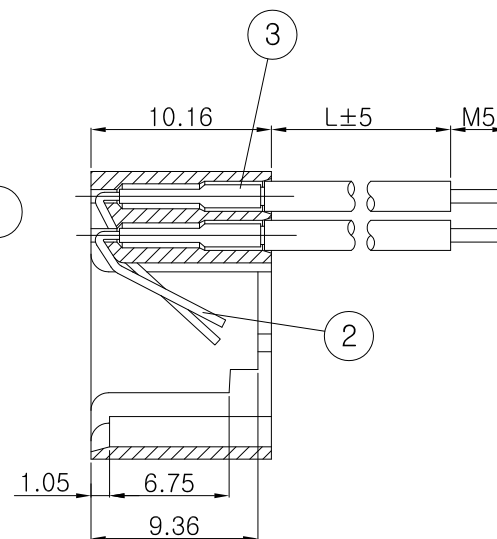
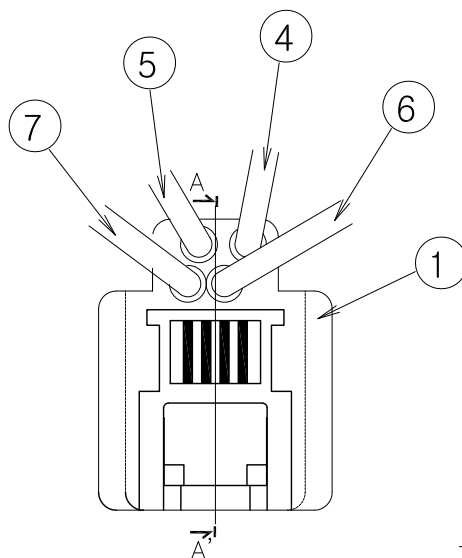
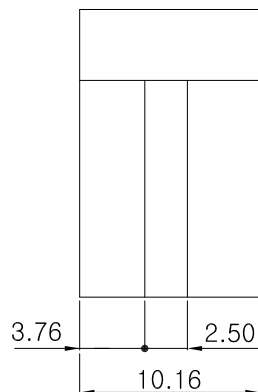


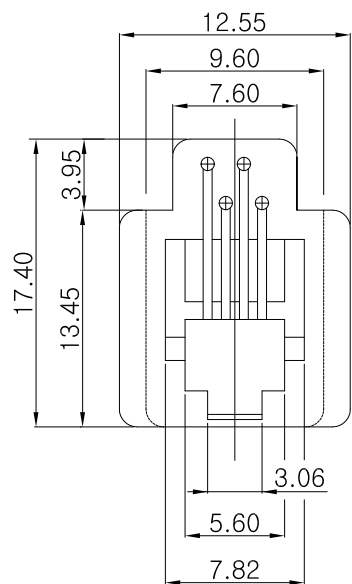

SECTION A-A'

NOTE

1. GOLD PLATING THICKNESS IS 15 M-IN
2. FCC TEST CONDITIONS ARE SATISFIED.
3. MATERIAL IS UL APPROVED.
4. OTHERWISE TOLERANCE .0±0.2
.00±0.1

7	INSULATION WIRE	P V C	YELLOW	70	AWG26	HI-LAP	UL 1061
6	INSULATION WIRE	P V C	RED	70	AWG26	HI-LAP	UL 1061
5	INSULATION WIRE	P V C	GREEN	70	AWG26	HI-LAP	UL 1061
4	INSULATION WIRE	P V C	BLACK	70	AWG26	HI-LAP	UL 1061
3	HOLDING PLATE	BRASS			0.23t		
2	GOLD WIRE	PHOSPHOROUS BRONZE			0.45		GOLD OVER NICKEL
1	HOUSING	A B S	W/G			AF303	UL94V-O
NO.	PART NAME	MATERIAL	COLOR	L	SIZE	SPEC	REMARKS

部 番	PART NO.	名 ☐	TITLE	鉛 料	MATERIAL	規 格		SPECIFICATION	☐ 理	TREATMENT	備 考	REMARK
						三角法 THIRD ANGLE PROJECTION	單 ☐ UNIT ☒ INCH (mm)					
								ELECTRONICS				
								圖 名 TITLE				
								圖 番 DRAWG. NO.				
								MODULAR JACK ASSY.				
								616MT4-70-M5				
									</			

