


tube printing

NOTES:

1. cell type: CR14250
2. OCV 3 volts min.
3. CCV 2.6 volts min. measured under 3.9 Ohm fixed load after 2 seconds.
4. Pin: SUS304 Nickel plating
5. All dimensions are in mm.

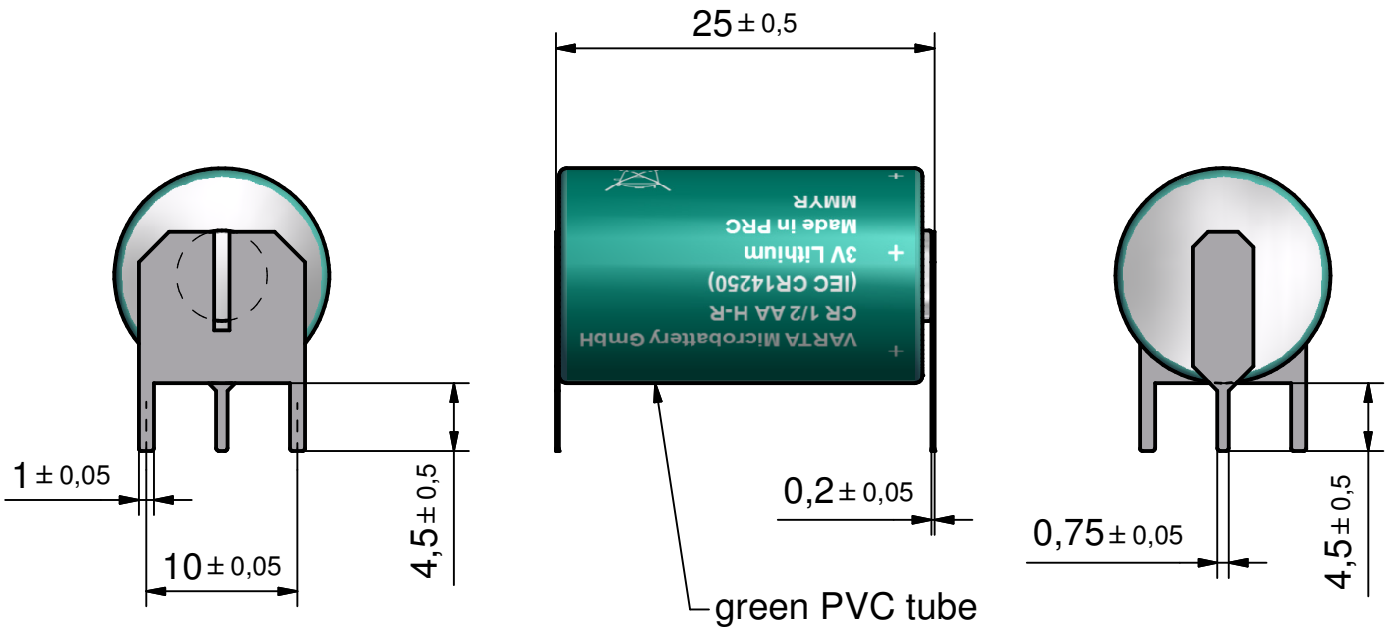

Freigabe

Index	Änderung / Alteration			Date	Name
Projection:	Freimaßtoleranzen General tolerances	Diese Maße werden besonders geprüft This dimensions are considered inspectable		Maßstab / Scale 2:1	
Maße in mm All dimensions in mm	up to 6 ± 0,1			Material VKB 6213 201 098	
Als Betriebsgeheimnis anvertraut, alle Rechte vorbehalten.  Proprietary data, company confidential, all rights reserved.	over 6 up to 30 ± 0,2	Date	Name	Benennung / Designation  <b>CR 1/2 AA H-R-PCBD</b> assembled with tags	
	over 30 up to 100 ± 0,3	Erst./Orig.	08.11.2017 mhewelt		
	over 100 ± 0,5	Bearb./Desig.	08.11.2017 mhewelt		
		Gepr./Check.		Format	Zchg. / Dwg.Nr.
				4	721867
		Origin:	repl.f.:	repl.by:	Alloc.:
					Status Index 4 00