

Pin1

RoHS COMPLIANT



REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JAN. 10'02
B		MODIFY POLES	JAN. 18'07
C		MODIFY P/N	JUN. 16'11

■ SPECIFICATIONS


- Voltage Rating : 125V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1000V AC/minute
- Insulation Resistance : 1000M Ω min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20m Ω max

■ WAFER

- PolesN : 2-15
- Material : Contact : Brass, Tin Plated
Base : Nylon 66 UL94V-2
- Q' ty : 1000 pcs./Bag

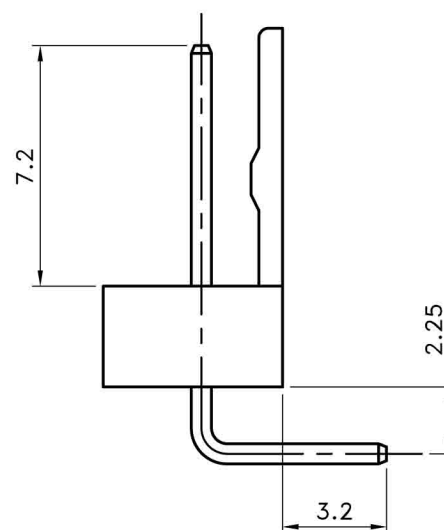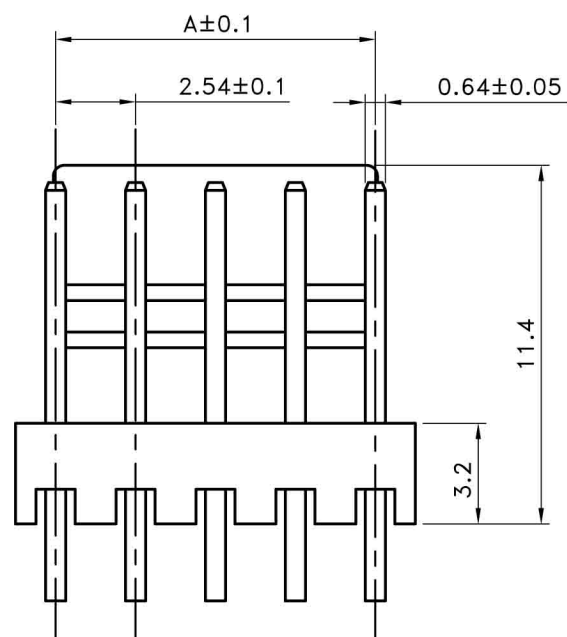

Poles	Dimensions(mm)	
	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10

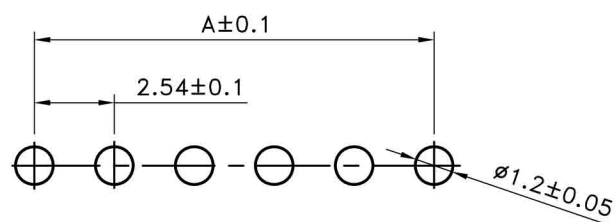

Recommand PCB Layout

TOLERANCE UNLESS OTHERWISE SPECIFIED	
LINEAR	ANGLE
X. ± 0.30	X° ±
.XX ±	.XX° ±
.XXX ±	.XXX° ±
APPD	
CHKD	
DRAW	Z
JUN. 16'2011	



UNITS
MM
SCALE
SIZE
A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
PITCH: 2.54MM WAFER
RIGHT ANGLE DIP
TYPE

CPART NO.

PART NO.
7001**RT(-*V)

CAD NO. I056

F:\PDF\HW\HW-A0005

SHEET
1 OF 1

圖面編號:GTKSD0876-C(1)