

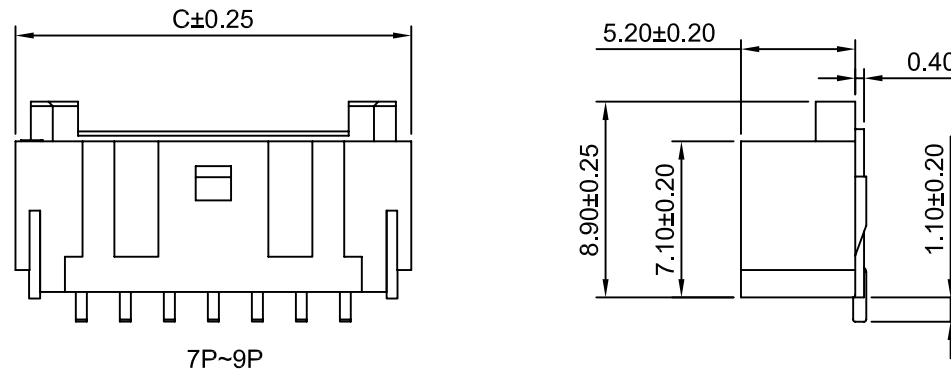
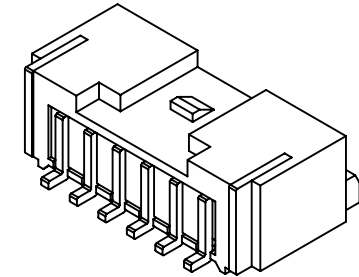
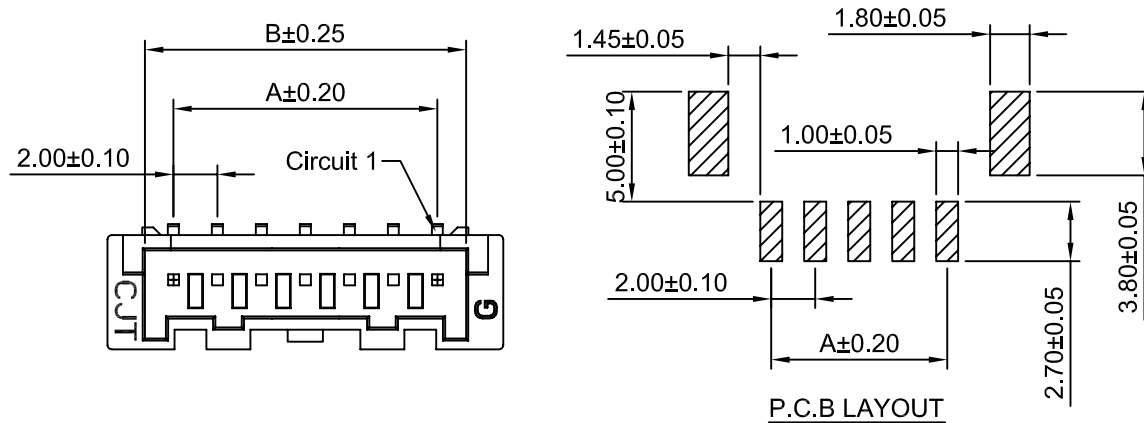


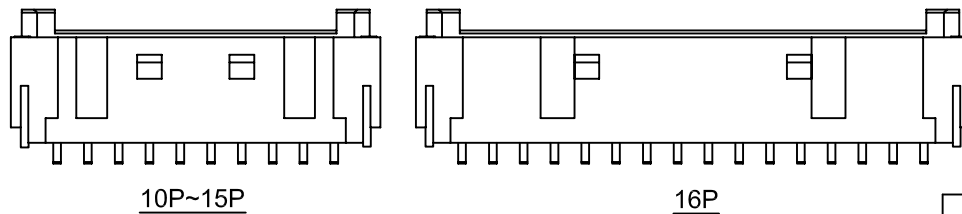

7P~9P

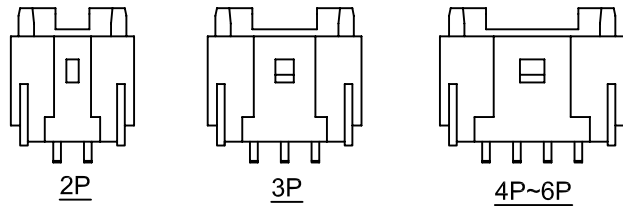

#### SPECIFICATIONS:

Current Rating: 3A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -40°C ~ +105°C  
Contact Resistance: 10mΩ Max.  
Insulation Resistance: 1000MΩ Min.  
Withstanding Voltage: 800V AC/minute  
Pin Material: Brass/Tin over Nickel  
Material: Nylon 6T, UL94V-0(Ivory)

#### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       |       | Circuits | Dimensions(mm) |       |       |
|----------|----------------|-------|-------|----------|----------------|-------|-------|
|          | A              | B     | C     |          | A              | B     | C     |
| 2P       | 2.00           | 4.60  | 8.00  | 10P      | 18.00          | 20.60 | 24.00 |
| 3P       | 4.00           | 6.60  | 10.00 | 11P      | 20.00          | 22.60 | 26.00 |
| 4P       | 6.00           | 8.60  | 12.00 | 12P      | 22.00          | 24.60 | 28.00 |
| 5P       | 8.00           | 10.60 | 14.00 | 13P      | 24.00          | 26.60 | 30.00 |
| 6P       | 10.00          | 12.60 | 16.00 | 14P      | 26.00          | 28.60 | 32.00 |
| 7P       | 12.00          | 14.60 | 18.00 | 15P      | 28.00          | 30.60 | 34.00 |
| 8P       | 14.00          | 16.60 | 20.00 | 16P      | 30.00          | 32.60 | 36.00 |
| 9P       | 16.00          | 18.60 | 22.00 |          |                |       |       |

**CJT**conn

CHANGJIANG CONNECTORS CO.,LTD.

| Unit     | Scale | Sheet      |
|----------|-------|------------|
| mm       | 3:1   | 1 of 1     |
| Draw BY: |       | Approved : |
| Tony Su  |       | Jack Yin   |

Title :  
2.00mm PITCH  
90° Wafer - SMT Type

| General Tolerance |        |
|-------------------|--------|
| x.xx±0.25         | ANGLE± |
| x.xx±0.20         |        |
| x.xxx±0.15        |        |

DRAW NO : A2012WR-S-XP REV A0

| A0  | NEW RELEASE | 2009.05.10 |
|-----|-------------|------------|
| REV | DESCRIPTION | DATE       |

## Specifications


Current rating: 3A AC, DC  
 Voltage rating: 250V AC, DC  
 Temperature range: -40°C ~ +105°C  
 Contact resistance: 10mΩ Max.  
 Insulation resistance: 1000MΩ Min.  
 Withstanding voltage: 800V AC/minute  
 \*Compliant with RoHS and REACH\*  
 \*Meet the HF/Halogen Free, need to customize\*  
 \*Contact CJT for details\*

## Standards

  
 E326732

  
 E326732

## Assembly layout

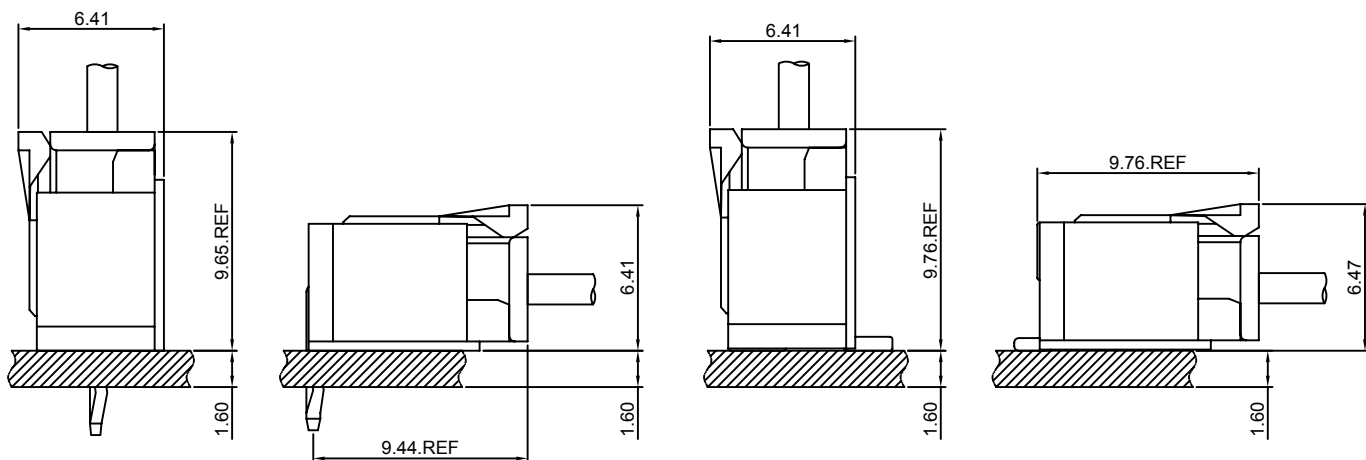


## A2012-T-D

2.00mm pitch Crimp Terminal

### Reference Informations:

\*Used in CJT A2012HD-2xXP series Dual Row Housing

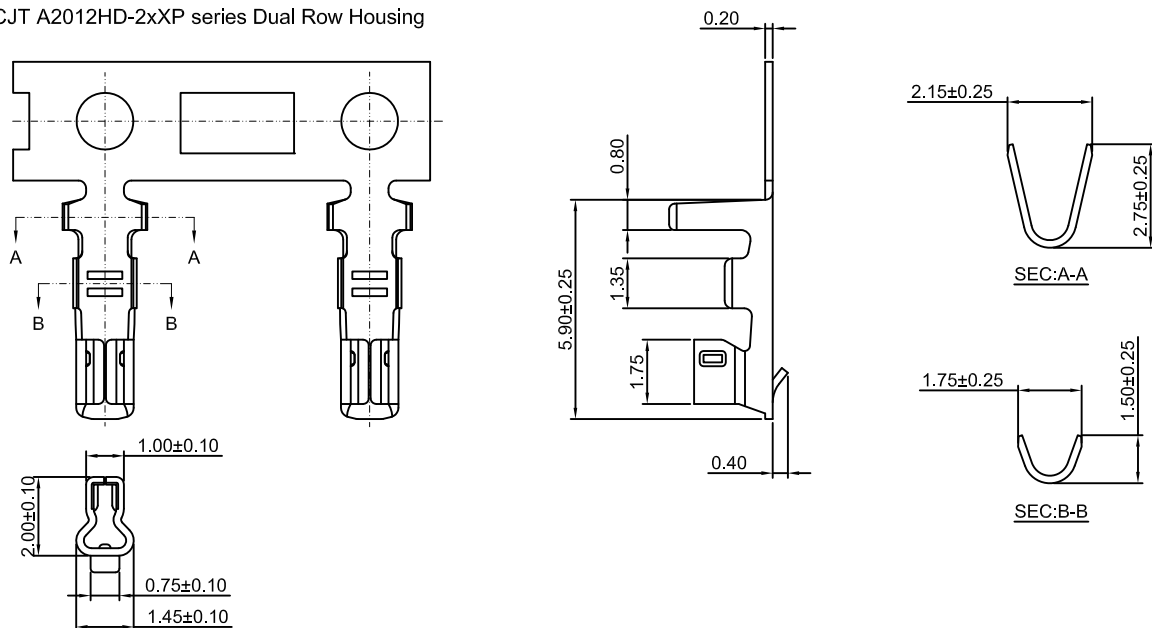

Ordering information & Specifications:

Unit:mm

| Part NO.   | Wire Range | Insulation O.D. | Material        | Finish           | Qty/reel   |
|------------|------------|-----------------|-----------------|------------------|------------|
| A2012-TP-D | AWG#24-#30 | 1.50mm(max)     | Phosphor Bronze | Tin over Nickel  | 10,000 PCS |
| A2012-GP-D | AWG#24-#30 | 1.50mm(max)     | Phosphor Bronze | Gold over Nickel | 10,000 PCS |

Optional Gold plating available but MOQ requested

## A2012H-XP

2.00mm pitch Housing

### Reference Informations:

\*Material:Nylon 66,UL94V-0

\*Suitable CJT A2006-T series Terminal

\*Mates with CJT A2012WV,WR,WV-S,WR-S,WV-F-XP, A2012WVA,WRA,WVA-F,WRA-F-XP series Wafer

\*Color:White

### Ordering Information:

A2012H-XP - \*\*\* - \*\*  
1 2 3

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750 °C

3.Color:

(Blank):White

BK:Black

RD:Red

BL:Blue

GN:Green

OR:Orange

BR:Brown

VI:Violet

PK:Pink

YL:Yellow





LY:Lemon yellow

VY:Vivid yellow

LE:Light blue

GY:Gray

TR:Tomato red

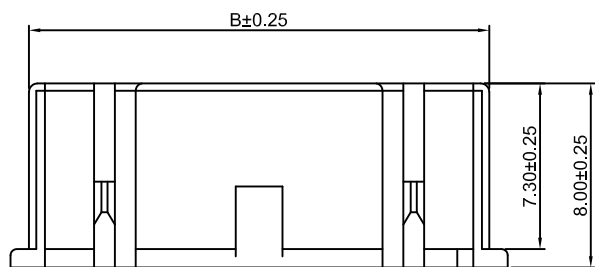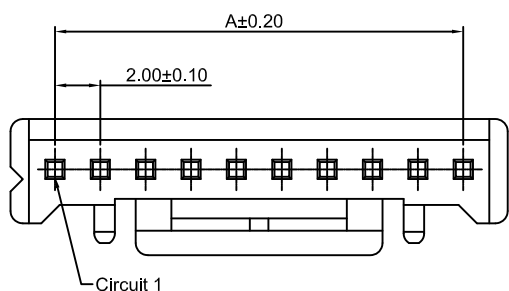

Ordering Information & Dimensions:

| PART NO. | Dimensions |       |
|----------|------------|-------|
|          | A          | B     |
| 2P       | 2.00       | 4.30  |
| 3P       | 4.00       | 6.30  |
| 4P       | 6.00       | 8.30  |
| 5P       | 8.00       | 10.30 |
| 6P       | 10.00      | 12.30 |
| 7P       | 12.00      | 14.30 |
| 8P       | 14.00      | 16.30 |
| 9P       | 16.00      | 18.30 |
| 10P      | 18.00      | 20.30 |
| 11P      | 20.00      | 22.30 |
| 12P      | 22.00      | 24.30 |
| 13P      | 24.00      | 26.30 |
| 14P      | 26.00      | 28.30 |
| 15P      | 28.00      | 30.30 |

Unit: mm

## A2012HD-2xXP

2.00mm pitch Dual Row Housing



### Reference Informations:

\*Material:Nylon 66,UL94V-0

\*Suitable CJT A2012-T-D series Terminal

\*Mates with CJT A2012WV,WV-F,WR-F-2xXP series Dual Row Wafer

\*Color:White

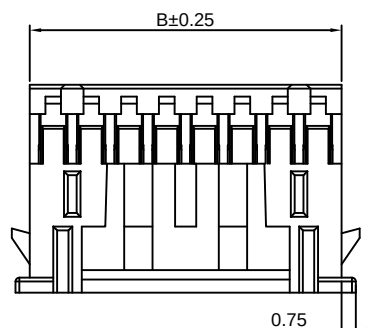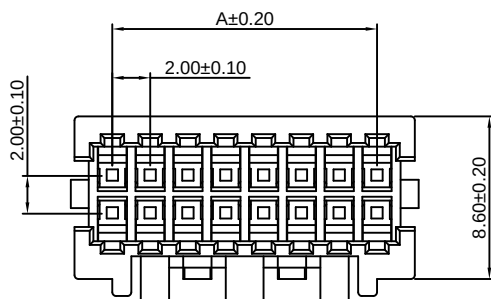

### Ordering Information:


A2012HD-2xXP - \*\*\*  
1 2

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750 °C



### Ordering Information & Dimensions:

| PART NO. | Dimensions |       |
|----------|------------|-------|
|          | A          | B     |
| 2x2P     | 2.00       | 5.00  |
| 2x3P     | 4.00       | 7.00  |
| 2x4P     | 6.00       | 9.00  |
| 2x5P     | 8.00       | 10.50 |
| 2x6P     | 10.00      | 12.50 |
| 2x7P     | 12.00      | 14.50 |
| 2x8P     | 14.00      | 16.50 |
| 2x9P     | 16.00      | 18.50 |
| 2x10P    | 18.00      | 20.50 |
| 2x11P    | 20.00      | 22.50 |
| 2x12P    | 22.00      | 24.50 |
| 2x13P    | 24.00      | 26.50 |
| 2x14P    | 26.00      | 28.50 |
| 2x15P    | 28.00      | 30.50 |
| 2x16P    | 30.00      | 32.50 |
| 2x17P    | 32.00      | 34.50 |
| 2x18P    | 34.00      | 36.50 |
| 2x19P    | 36.00      | 38.50 |
| 2x20P    | 38.00      | 40.50 |

Unit: mm

## A2012WV-XP

2.00mm pitch 180° Wafer

### Reference Informations:

\*Material:Pin:Brass/Tin over Nickel

Insulator:Nylon 6T,UL94V-0

\*Mates with CJT A2012H-XP series Housing

\*Color:Ivory

### Ordering Information:

A2012WV-XP - \*\*\* - \*\*  
1 2 3

1.Part No.

2.Material:



(Blank):Nylon 6T,UL94V-0

GWT:Nylon 6T,UL94V-0,GWT 750 °C




3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel



P.C.B LAYOUT

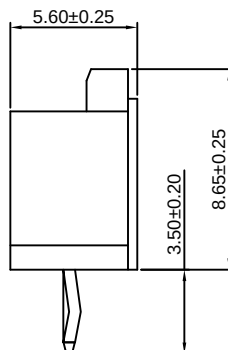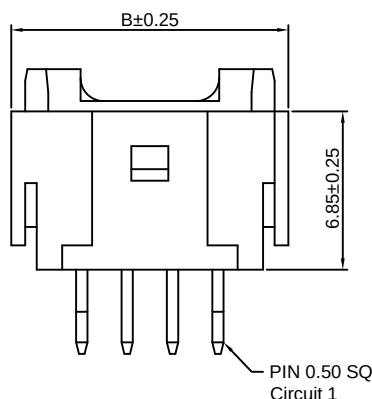

### Ordering Information & Dimensions:

| PART NO. | Dimensions |       |
|----------|------------|-------|
|          | A          | B     |
| 2P       | 2.00       | 8.00  |
| 3P       | 4.00       | 10.00 |
| 4P       | 6.00       | 12.00 |
| 5P       | 8.00       | 14.00 |
| 6P       | 10.00      | 16.00 |
| 7P       | 12.00      | 18.00 |
| 8P       | 14.00      | 20.00 |
| 9P       | 16.00      | 22.00 |
| 10P      | 18.00      | 24.00 |
| 11P      | 20.00      | 26.00 |
| 12P      | 22.00      | 28.00 |
| 13P      | 24.00      | 30.00 |
| 14P      | 26.00      | 32.00 |
| 15P      | 28.00      | 34.00 |
| 16P      | 30.00      | 36.00 |

Unit: mm

## A2012WR-XP

2.00mm pitch 90° Wafer

## Reference Informations:

\*Material:Pin:Brass/Tin over Nickel  
Insulator:Nylon 6T,UL94V-0

\*Mates with CJT A2012H-XP series Housing

\*Color:Ivory

## Ordering Information:

A2012WR-XP - \*\*\* - \*\*  
1 2 3

1.Part No.

2.Material:






(Blank):Nylon 6T,UL94V-0

GWT:Nylon 6T,UL94V-0,GWT 750 °C

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

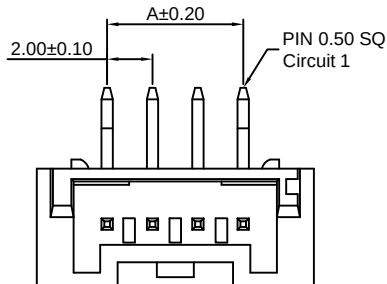

## Ordering Information &amp; Dimensions:

| PART NO. | Dimensions |       |
|----------|------------|-------|
|          | A          | B     |
| 2P       | 2.00       | 8.00  |
| 3P       | 4.00       | 10.00 |
| 4P       | 6.00       | 12.00 |
| 5P       | 8.00       | 14.00 |
| 6P       | 10.00      | 16.00 |
| 7P       | 12.00      | 18.00 |
| 8P       | 14.00      | 20.00 |
| 9P       | 16.00      | 22.00 |
| 10P      | 18.00      | 24.00 |
| 11P      | 20.00      | 26.00 |
| 12P      | 22.00      | 28.00 |
| 13P      | 24.00      | 30.00 |
| 14P      | 26.00      | 32.00 |
| 15P      | 28.00      | 34.00 |
| 16P      | 30.00      | 36.00 |

Unit: mm

## A2012WV-S-XP

2.00mm pitch 180° Wafer-SMT TYPE

## Reference Informations:

\*Material:Pin:Brass/Tin over Nickel  
Insulator:Nylon 6T,UL94V-0

\*Mates with CJT A2012H-XP series Housing

\*Color:Ivory

## Ordering Information:

A2012WV-S-XP - \*\*\* - \*\*  
1 2 3

1.Part No.

2.Material:






(Blank):Nylon 6T,UL94V-0

GWT:Nylon 6T,UL94V-0,GWT 750 °C

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

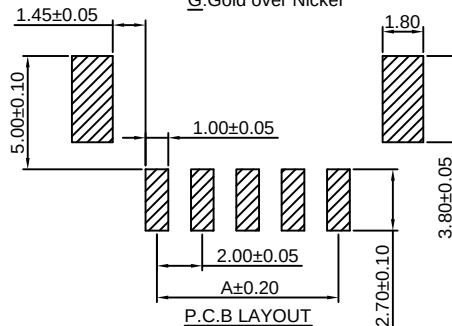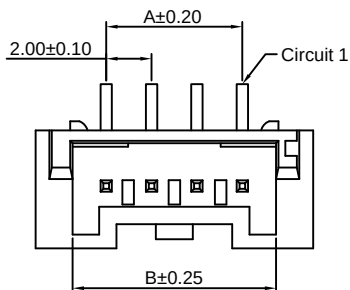

## Ordering Information &amp; Dimensions:

| PART NO. | Dimensions |       |       |
|----------|------------|-------|-------|
|          | A          | B     | C     |
| 2P       | 2.00       | 4.50  | 8.00  |
| 3P       | 4.00       | 6.50  | 10.00 |
| 4P       | 6.00       | 8.50  | 12.00 |
| 5P       | 8.00       | 10.50 | 14.00 |
| 6P       | 10.00      | 12.50 | 16.00 |
| 7P       | 12.00      | 14.50 | 18.00 |
| 8P       | 14.00      | 16.50 | 20.00 |
| 9P       | 16.00      | 18.50 | 22.00 |
| 10P      | 18.00      | 20.50 | 24.00 |
| 11P      | 20.00      | 22.50 | 26.00 |
| 12P      | 22.00      | 24.50 | 28.00 |
| 13P      | 24.00      | 26.50 | 30.00 |
| 14P      | 26.00      | 28.50 | 32.00 |
| 15P      | 28.00      | 30.50 | 34.00 |
| 16P      | 30.00      | 32.50 | 36.00 |

Unit: mm

## A2012WR-S-XP

2.00mm pitch 90° Wafer-SMT TYPE

## Reference Informations:

\*Material:Pin:Brass/Tin over Nickel

Insulator:Nylon 6T,UL94V-0

\*Mates with CJT A2012H-XP series Housing

\*Color:Ivory

## Ordering Information:

A2012WR-S-XP - \*\*\* - \*\*  
1 2 3

1.Part No.

2.Material:



(Blank):Nylon 6T,UL94V-0

GWT:Nylon 6T,UL94V-0,GWT 750 °C

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

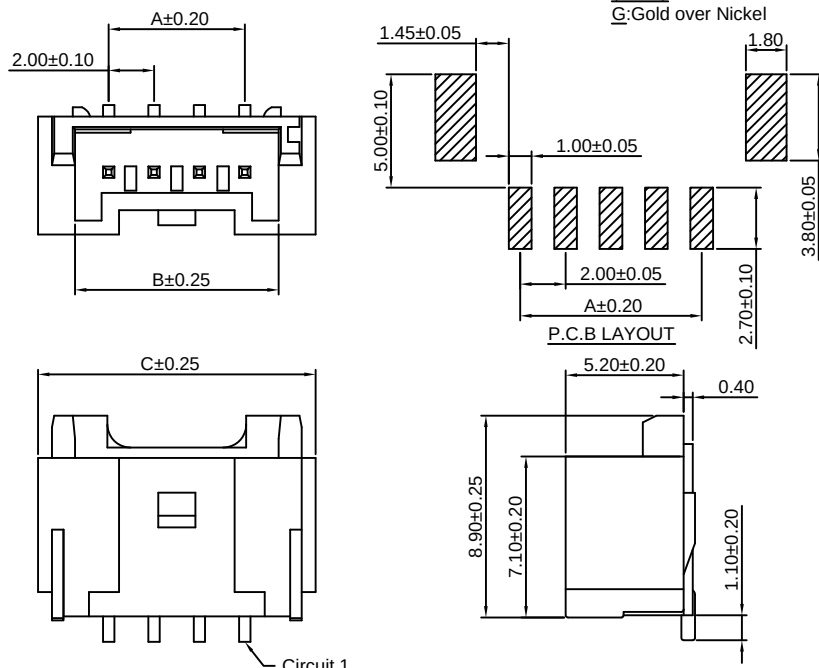

## Ordering Information &amp; Dimensions:

| PART NO. | Dimensions |       |       |
|----------|------------|-------|-------|
|          | A          | B     | C     |
| 2P       | 2.00       | 4.50  | 8.00  |
| 3P       | 4.00       | 6.50  | 10.00 |
| 4P       | 6.00       | 8.50  | 12.00 |
| 5P       | 8.00       | 10.50 | 14.00 |
| 6P       | 10.00      | 12.50 | 16.00 |
| 7P       | 12.00      | 14.50 | 18.00 |
| 8P       | 14.00      | 16.50 | 20.00 |
| 9P       | 16.00      | 18.50 | 22.00 |
| 10P      | 18.00      | 20.50 | 24.00 |
| 11P      | 20.00      | 22.50 | 26.00 |
| 12P      | 22.00      | 24.50 | 28.00 |
| 13P      | 24.00      | 26.50 | 30.00 |
| 14P      | 26.00      | 28.50 | 32.00 |
| 15P      | 28.00      | 30.50 | 34.00 |
| 16P      | 30.00      | 32.50 | 36.00 |

Unit: mm

## A2012WV-F-XP

2.00mm pitch 180° Wafer

## Reference Informations:

\*Material:Pin:Brass/Tin over Nickel

Insulator:Nylon 66,UL94V-0

\*Mates with CJT A2012H-XP series Housing

\*Color:Ivory

## Ordering Information:

A2012WV-F-XP - \*\*\* - \*\*  
1 2 3

1.Part No.

2.Material:


(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750 °C

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

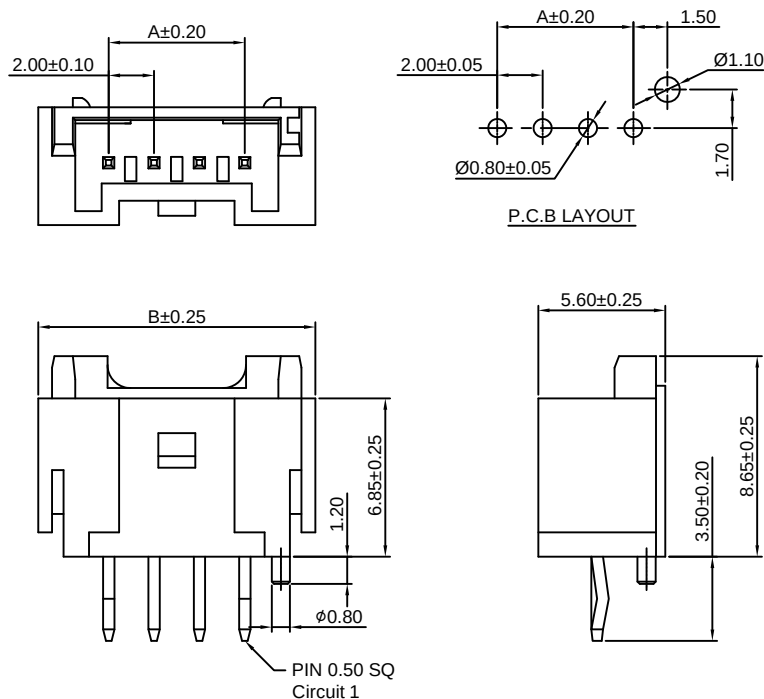

## Ordering Information &amp; Dimensions:

| PART NO. | Dimensions |       |
|----------|------------|-------|
|          | A          | B     |
| 2P       | 2.00       | 8.00  |
| 3P       | 4.00       | 10.00 |
| 4P       | 6.00       | 12.00 |
| 5P       | 8.00       | 14.00 |
| 6P       | 10.00      | 16.00 |
| 7P       | 12.00      | 18.00 |
| 8P       | 14.00      | 20.00 |
| 9P       | 16.00      | 22.00 |
| 10P      | 18.00      | 24.00 |
| 11P      | 20.00      | 26.00 |
| 12P      | 22.00      | 28.00 |
| 13P      | 24.00      | 30.00 |
| 14P      | 26.00      | 32.00 |
| 15P      | 28.00      | 34.00 |
| 16P      | 30.00      | 36.00 |

Unit: mm

### A2012WVA-XP

2.00mm pitch 180° Wafer

#### Reference Informations:

- \*Material:Pin:Brass/Tin over Nickel  
Insulator:Nylon 66,UL94V-0
- \*Mates with CJT A2012H-XP series Housing
- \*Color:White

#### Ordering Information:

A2012WVA-XP - \*\*\* - \*\* - \*\*  
1 2 3 4

#### 1.Part No.

#### 2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750 °C

#### 3.Color:

(Blank):White

BK:Black

RD:Red

BL:Blue

GN:Green

OR:Orange

BR:Brown

VI:Violet

PK:Pink

YL:Yellow

LY:Lemon yellow

VY:Vivid yellow

LE:Light blue









GY:Gray

TR:Tomato red

#### 4.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

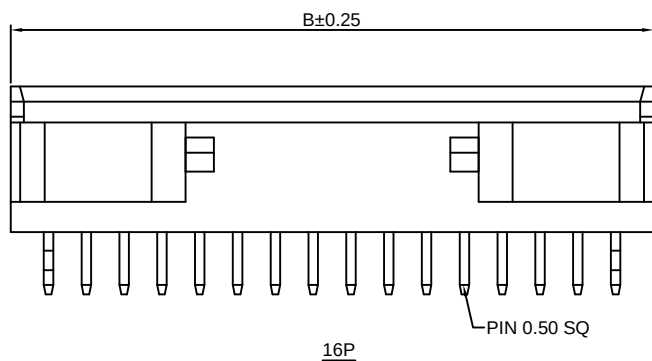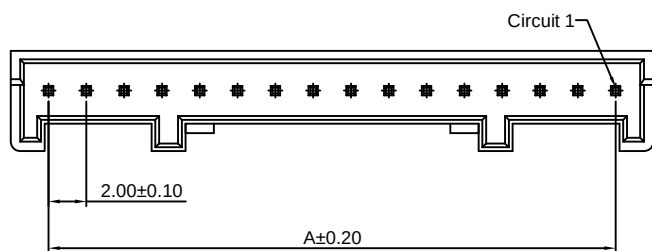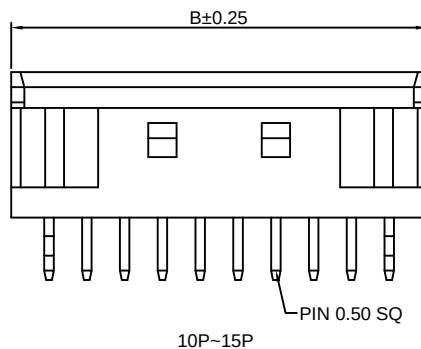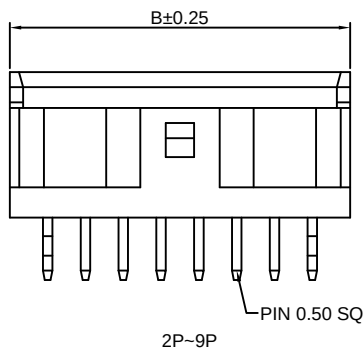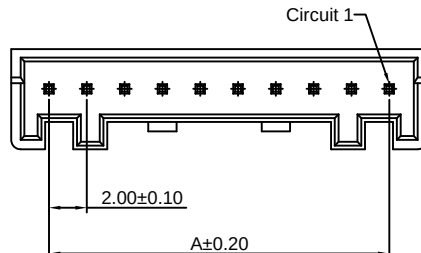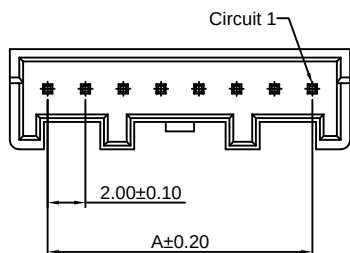

#### Ordering Information & Dimensions:

| PART NO. | Dimensions |       |
|----------|------------|-------|
|          | A          | B     |
| 2P       | 2.00       | 6.00  |
| 3P       | 4.00       | 8.00  |
| 4P       | 6.00       | 10.00 |
| 5P       | 8.00       | 12.00 |
| 6P       | 10.00      | 14.00 |
| 7P       | 12.00      | 16.00 |
| 8P       | 14.00      | 18.00 |
| 9P       | 16.00      | 20.00 |
| 10P      | 18.00      | 22.00 |
| 11P      | 20.00      | 24.00 |
| 12P      | 22.00      | 26.00 |
| 13P      | 24.00      | 28.00 |
| 14P      | 26.00      | 30.00 |
| 15P      | 28.00      | 32.00 |
| 16P      | 30.00      | 34.00 |

Unit: mm

# A2012WRA-XP

2.00mm pitch 90° Wafer









### Reference Informations:

- \*Material:Pin:Brass/Tin over Nickel  
Insulator:Nylon 66,UL94V-0
- \*Mates with CJT A2012H-XP series Housing
- \*Color:White

### Ordering Information:

A2012WRA-XP - \*\*\* - \*\* - \*\*  
1 2 3 4

- 1.Part No.
- 2.Material:  
(Blank):Nylon 66,UL94V-0  
GWT:Nylon 66,UL94V-0,GWT 750 °C
- 3.Color:  
(Blank):White  
BK:Black PK:Pink  
RD:Red YL:Yellow  
BL:Blue LY:Lemon yellow  
GN:Green VY:Vivid yellow  
OR:Orange LE:Light blue  
BR:Brown GY:Gray  
VI:Violet TR:Tomato red
- 4.Finish:  
(blank):Tin over Nickel  
G:Gold over Nickel

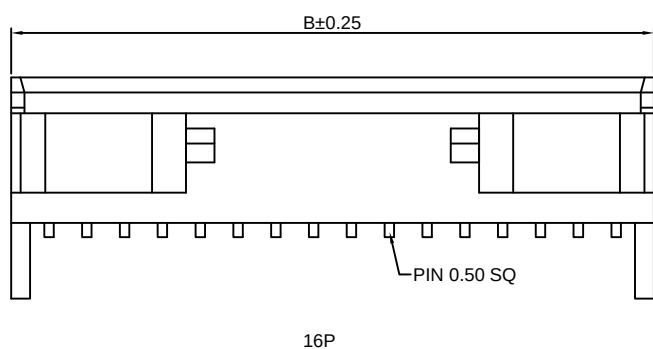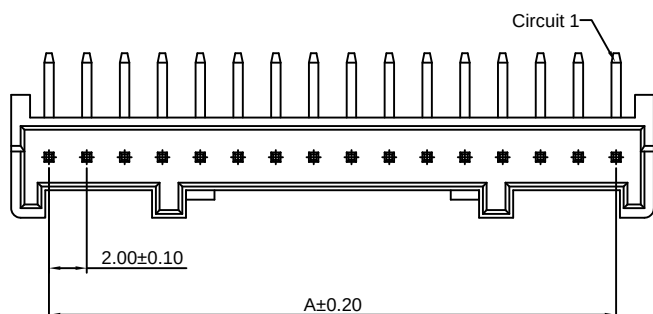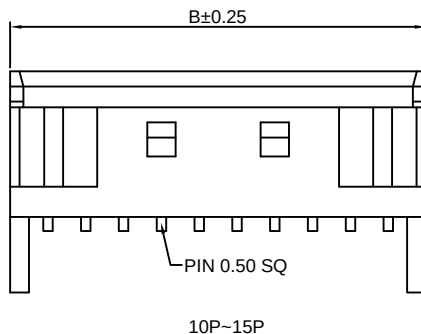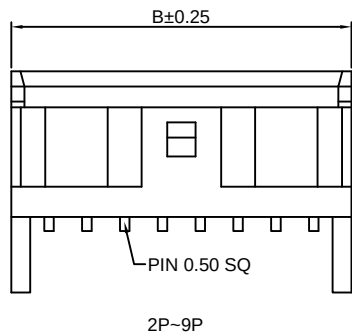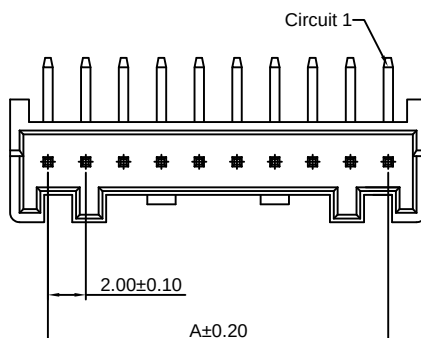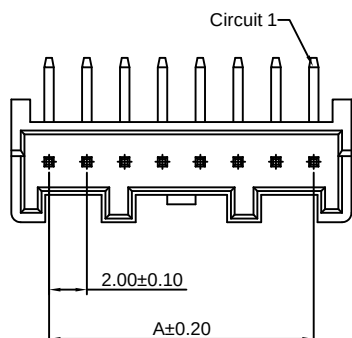

### Ordering Information & Dimensions:

| PART NO. | Dimensions |       |
|----------|------------|-------|
|          | A          | B     |
| 2P       | 2.00       | 6.00  |
| 3P       | 4.00       | 8.00  |
| 4P       | 6.00       | 10.00 |
| 5P       | 8.00       | 12.00 |
| 6P       | 10.00      | 14.00 |
| 7P       | 12.00      | 16.00 |
| 8P       | 14.00      | 18.00 |
| 9P       | 16.00      | 20.00 |
| 10P      | 18.00      | 22.00 |
| 11P      | 20.00      | 24.00 |
| 12P      | 22.00      | 26.00 |
| 13P      | 24.00      | 28.00 |
| 14P      | 26.00      | 30.00 |
| 15P      | 28.00      | 32.00 |
| 16P      | 30.00      | 34.00 |

Unit: mm



## A2012WVA-F-XP

2.00mm pitch 180° Wafer

## Reference Informations:

\*Material:Pin:Brass/Tin over Nickel

Insulator:Nylon 66,UL94V-0

\*Mates with CJT A2012H-XP series Housing

\*Color:White

## Ordering Information:

A2012WVA-F-XP - \*\*\* - \*\* - \*\*  
1 2 3 4

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750℃

3.Color:

(Blank):White

BK:Black

RD:Red

BL:Blue

GN:Green

OR:Orange

BR:Brown

VI:Violet

PK:Pink

YL:Yellow

LY:Lemon yellow

VY:Vivid yellow

LE:Light blue









GY:Gray

TR:Tomato red

4.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

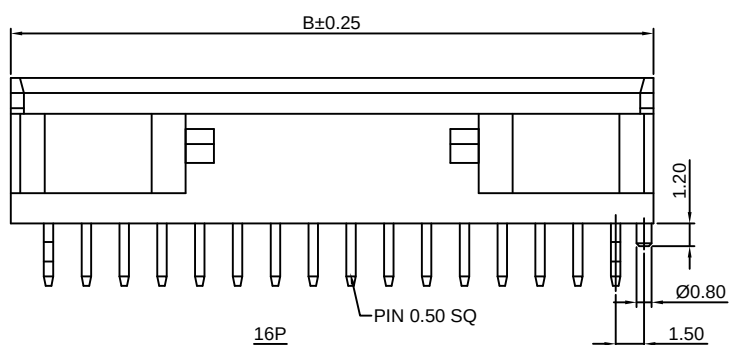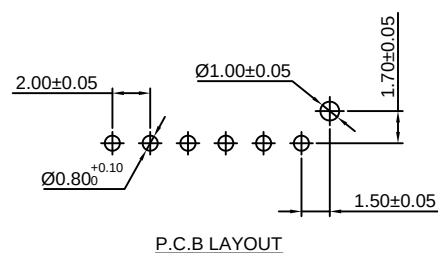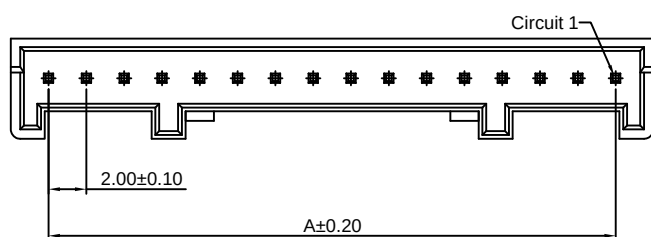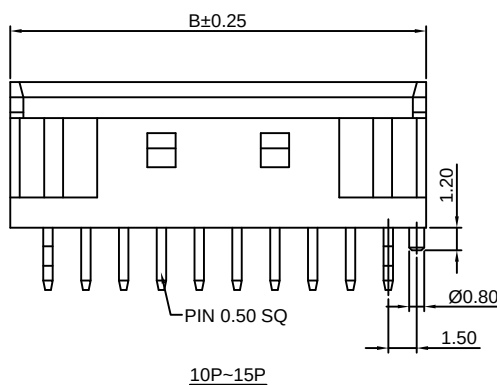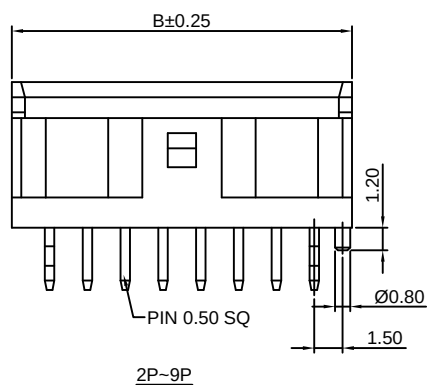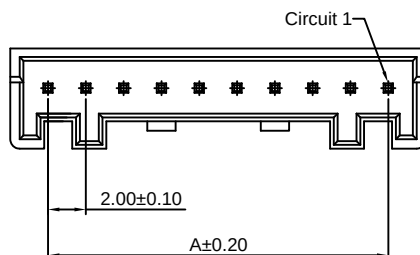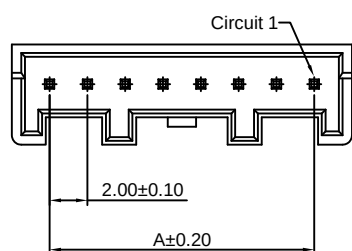

## Ordering Information &amp; Dimensions:

| PART NO. | Dimensions |       |
|----------|------------|-------|
|          | A          | B     |
| 2P       | 2.00       | 6.00  |
| 3P       | 4.00       | 8.00  |
| 4P       | 6.00       | 10.00 |
| 5P       | 8.00       | 12.00 |
| 6P       | 10.00      | 14.00 |
| 7P       | 12.00      | 16.00 |
| 8P       | 14.00      | 18.00 |
| 9P       | 16.00      | 20.00 |
| 10P      | 18.00      | 22.00 |
| 11P      | 20.00      | 24.00 |
| 12P      | 22.00      | 26.00 |
| 13P      | 24.00      | 28.00 |
| 14P      | 26.00      | 30.00 |
| 15P      | 28.00      | 32.00 |
| 16P      | 30.00      | 34.00 |

Unit: mm

## A2012WRA-F-XP

2.00mm pitch 90° Wafer

## Reference Informations:

\*Material:Pin:Brass/Tin over Nickel

Insulator:Nylon 66,UL94V-0

\*Mates with CJT A2012H-XP series Housing

\*Color:White

## Ordering Information:

A2012WRA-F-XP - \*\*\* - \*\* - \*\*  
1 2 3 4

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750 °C

3.Color:

(Blank):White

BK:Black

RD:Red

BL:Blue

GN:Green

OR:Orange

BR:Brown

VI:Violet

PK:Pink

YL:Yellow

LY:Lemon yellow

VY:Vivid yellow

LE:Light blue









GY:Gray

TR:Tomato red

4.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

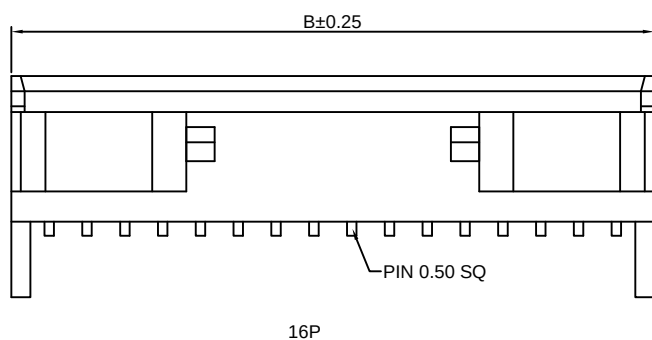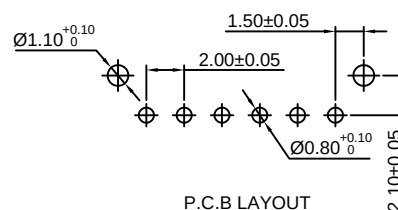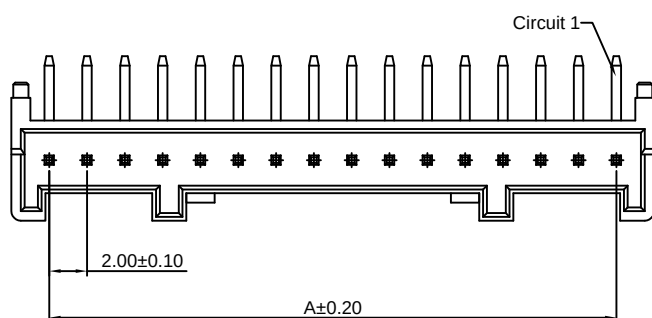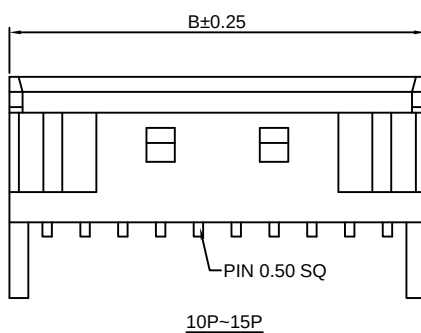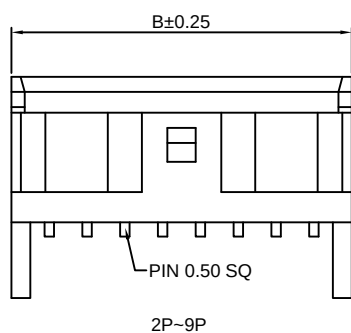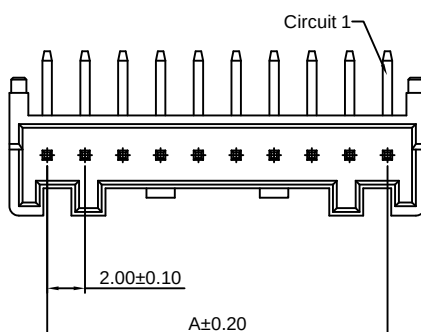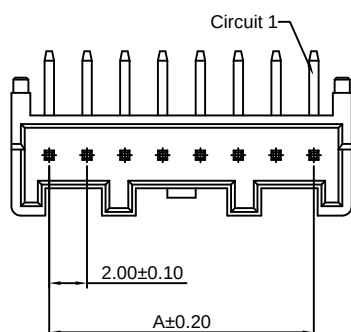

## Ordering Information &amp; Dimensions:

| PART NO. | Dimensions |       |
|----------|------------|-------|
|          | A          | B     |
| 2P       | 2.00       | 6.00  |
| 3P       | 4.00       | 8.00  |
| 4P       | 6.00       | 10.00 |
| 5P       | 8.00       | 12.00 |
| 6P       | 10.00      | 14.00 |
| 7P       | 12.00      | 16.00 |
| 8P       | 14.00      | 18.00 |
| 9P       | 16.00      | 20.00 |
| 10P      | 18.00      | 22.00 |
| 11P      | 20.00      | 24.00 |
| 12P      | 22.00      | 26.00 |
| 13P      | 24.00      | 28.00 |
| 14P      | 26.00      | 30.00 |
| 15P      | 28.00      | 32.00 |
| 16P      | 30.00      | 34.00 |

Unit: mm

## A2012WV-2xXP

2.00mm pitch 180° Dual Row Wafer

## Reference Informations:

\*Material:Pin:Phosphor Bronze/Tin over Nickel  
Insulator:Nylon 66,UL94V-0

\*Mates with CJT A2012HD-2xXP series Dual Row Housing

\*Color:Ivory

## Ordering Information:

A2012WV-2xXP - \*\*\* - \*\*  
1 2 3

1.Part No.

2.Material:





(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

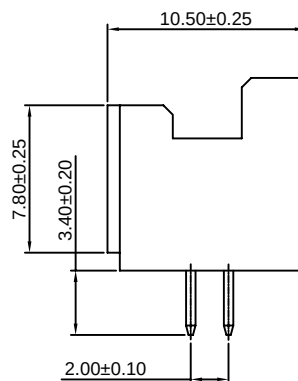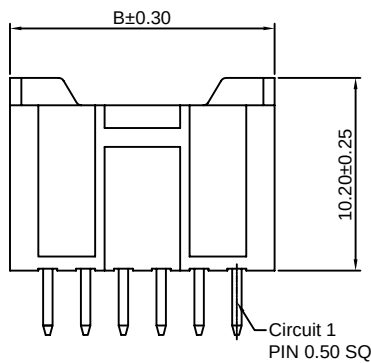

## Ordering Information &amp; Dimensions:

| PART NO. | Dimensions |       |
|----------|------------|-------|
|          | A          | B     |
| 2x5P     | 8.00       | 12.00 |
| 2x6P     | 10.00      | 14.00 |
| 2x7P     | 12.00      | 16.00 |
| 2x8P     | 14.00      | 18.00 |
| 2x9P     | 16.00      | 20.00 |
| 2x10P    | 18.00      | 22.00 |
| 2x11P    | 20.00      | 24.00 |
| 2x12P    | 22.00      | 26.00 |
| 2x20P    | 38.00      | 42.00 |

Unit: mm

## A2012WV-F-2xXP

2.00mm pitch 180° Dual Row Wafer

## Reference Informations:

\*Material:Pin:Phosphor Bronze/Tin over Nickel  
Insulator:Nylon 66,UL94V-0

\*Mates with CJT A2012HD-2xXP series Dual Row Housing

\*Color:Ivory

## Ordering Information:

A2012WV-F-2xXP - \*\*\* - \*\*  
1 2 3

1.Part No.

2.Material:





(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

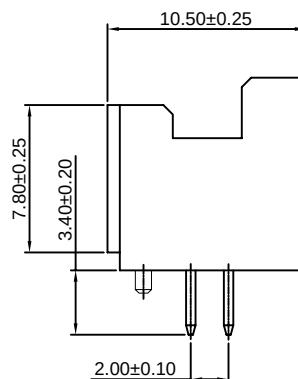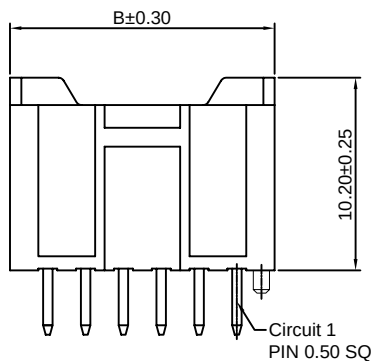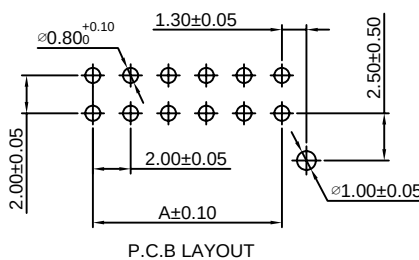

## Ordering Information &amp; Dimensions:

| PART NO. | Dimensions |       |
|----------|------------|-------|
|          | A          | B     |
| 2x5P     | 8.00       | 12.00 |
| 2x6P     | 10.00      | 14.00 |
| 2x7P     | 12.00      | 16.00 |
| 2x8P     | 14.00      | 18.00 |
| 2x9P     | 16.00      | 20.00 |
| 2x10P    | 18.00      | 22.00 |
| 2x11P    | 20.00      | 24.00 |
| 2x12P    | 22.00      | 26.00 |
| 2x20P    | 38.00      | 42.00 |

Unit: mm

## A2012WR-F-2xXP

2.00mm pitch 90° Dual Row Wafer

## Reference Informations:

\*Material:Pin:Phosphor Bronze/Tin over Nickel

Insulator:Nylon 66,UL94V-0

\*Mates with CJT A2012HD-2xXP series Dual Row Housing

\*Color:White

## Ordering Information:

A2012WR-F-2xXP - \*\*\* - \*\*  
1 2 3

1.Part No.

2.Material:





(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750℃

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

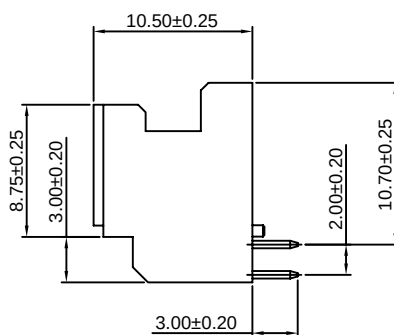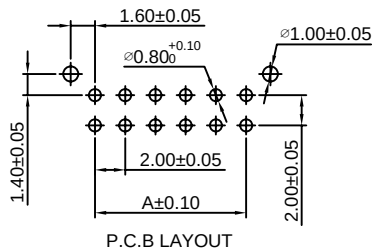

## Ordering Information &amp; Dimensions:

| PART NO. | Dimensions |       |
|----------|------------|-------|
|          | A          | B     |
| 2x5P     | 8.00       | 12.00 |
| 2x6P     | 10.00      | 14.00 |
| 2x7P     | 12.00      | 16.00 |
| 2x8P     | 14.00      | 18.00 |
| 2x9P     | 16.00      | 20.00 |
| 2x10P    | 18.00      | 22.00 |
| 2x11P    | 20.00      | 24.00 |
| 2x12P    | 22.00      | 26.00 |
| 2x20P    | 38.00      | 42.00 |

Unit: mm