


REV.	SYMBOL	DESCRIPTION	NAME	DATE
A		FIRST ISSUE	ZXUEDONG	Dec-17-2007
B	△	CHANGE IC	JIN.ZHANG	NOV-02-2017



PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	V0	RS	R/W	E	D0	D1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	D2	D3	D4	D5	D6	D7	LEDA	LEDK

ITEM	PARAMETERS	ITEM	PARAMETERS	RoHS/REACH COMPLIANT	YES
DISPLAY TYPE	STN,NEGATIVE,BLUE	VIEWING DIRECTION	6 O'CLOCK	UNMARKED TOLERANCE	± 0.30
DRIVING METHOD	1/16 DUTY,1/5 BIAS	OPERATING TEMPERATURE	-20°C TO +70°C	SCALE	FIT UNIT mm
POLARIZER TYPE	TRANSMISSIVE	STORAGE TEMPERATURE	-30°C TO +80°C	SHEET	1 OF 1 REV. B
LCD OPERATING VOLTAGE	4.2V(REF)	IC	AIP31066L-001(Or compatible)△	TITLE	LCM
LOGIC VOLTAGE(VDD)	5.0V	BACKLIGHT	EDGE,WHITE(2LEDS)	PART NO.	/
GRAYSACLE SUPPORT	NO	CONNECTOR	ZEBRA	MODULE NO.	ABC016002A15-BIW-R
MARK"*"ARE IMPORTANT DIMENSIONS,MARK()"ARE REFERENCE DIMENSIONS,MARK" ★"ARE SPECIAL CHARACTERISTICS RELATED TO SAFETY,MARK" ☆" ARE SPECIAL CHARACTERISTICS IRRELEVANT TO SAFETY,MARK"●"ARE IMPROTANT CHARACTERISTICS EXCEPT FOR THE SPECIAL CHARACTERISTICS.				CUSTOMER NO.	/
				APPROVED	Jin.zhang yanhui.li qinjingwei
				NAME	JIN.ZHANG YAN HUI LI QIN JING WEI
				DATE	NOV-02-2017 NOV-02-2017 NOV-02-2017
THIS DRAWING IS PROPERTY OF AV-DISPLAY CO. LIMITED,IT CANNOT BE REPRODUCED WITHOUT PERMISSION.					

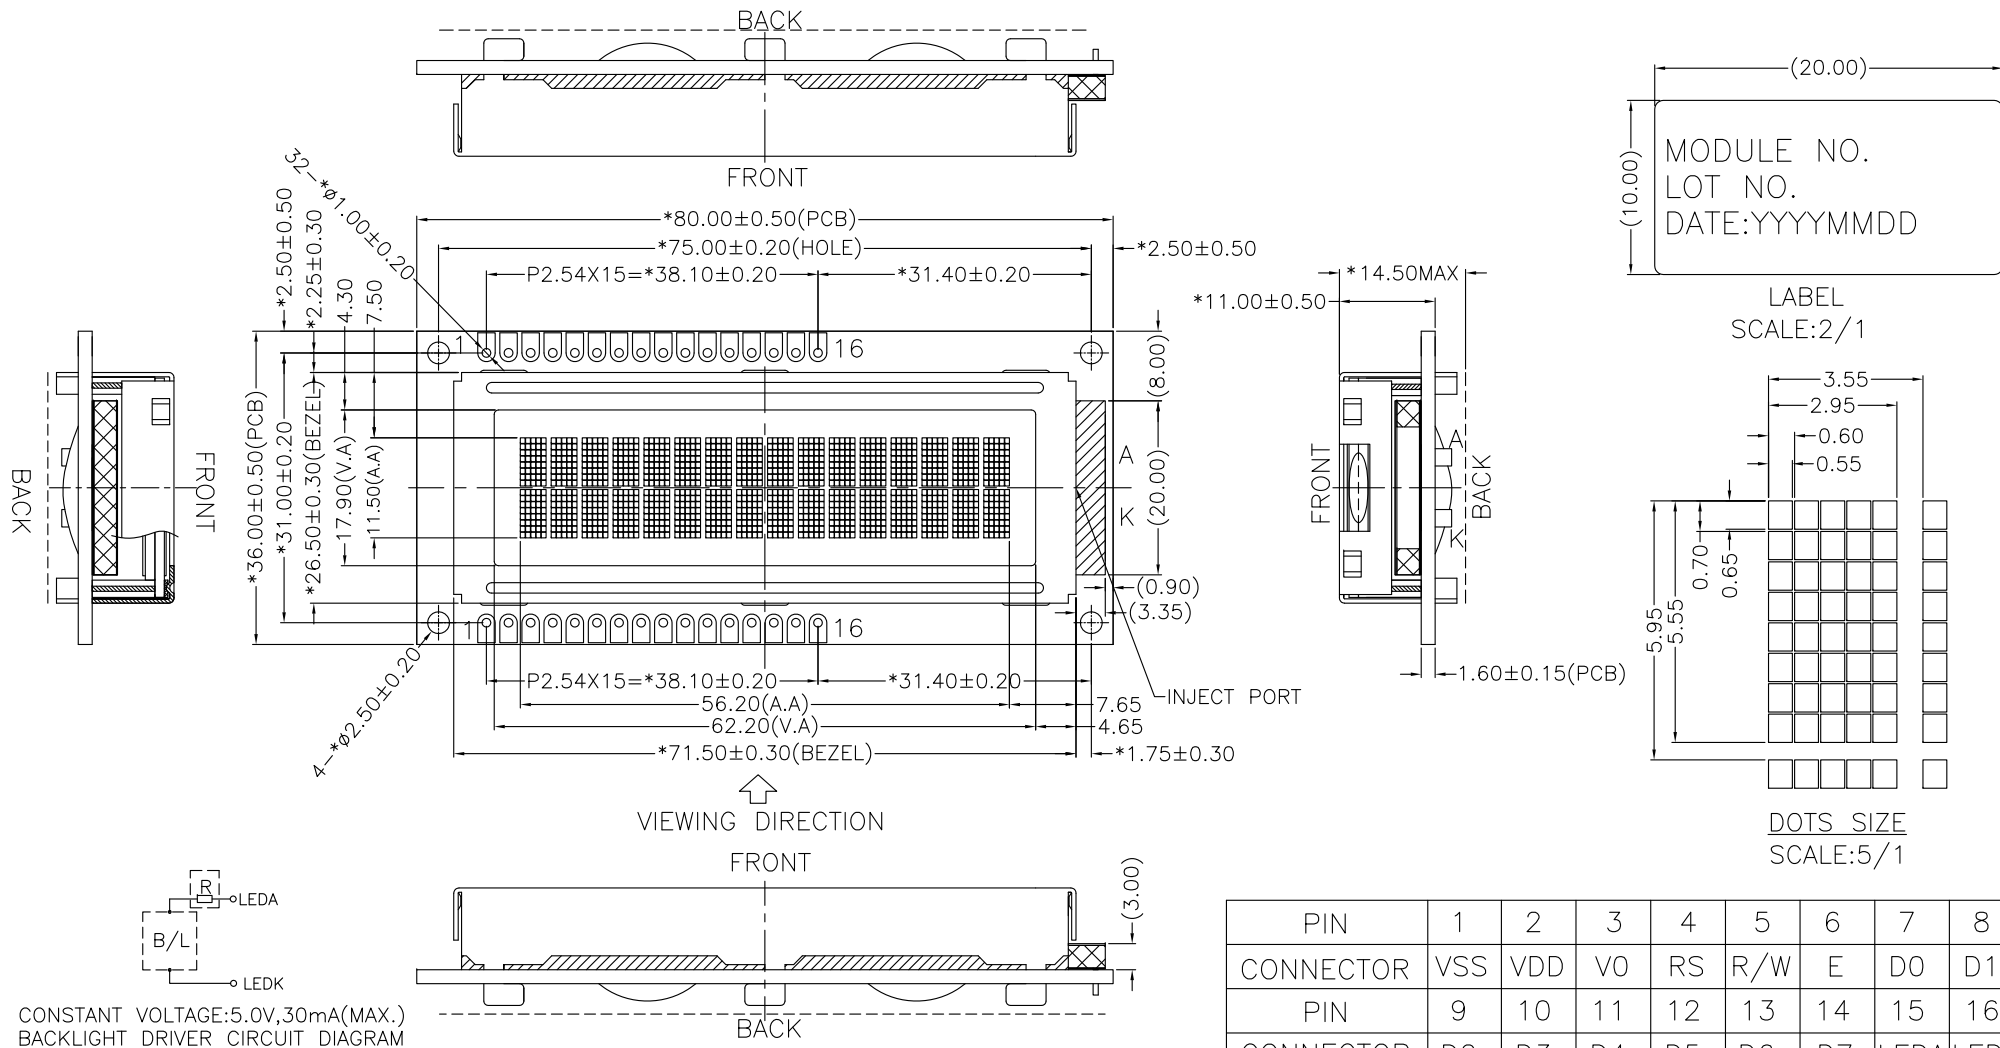