
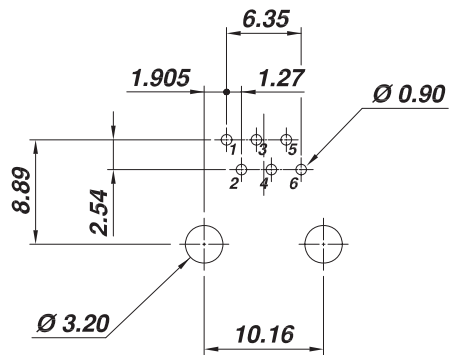
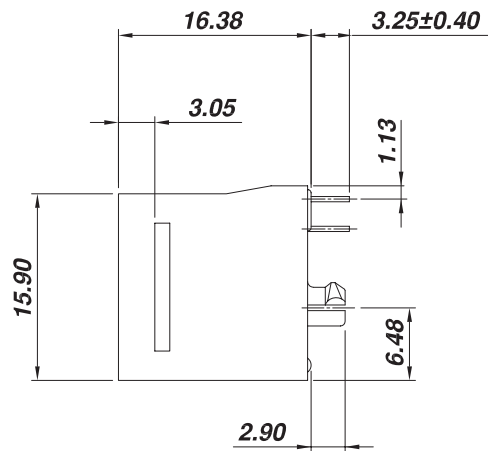
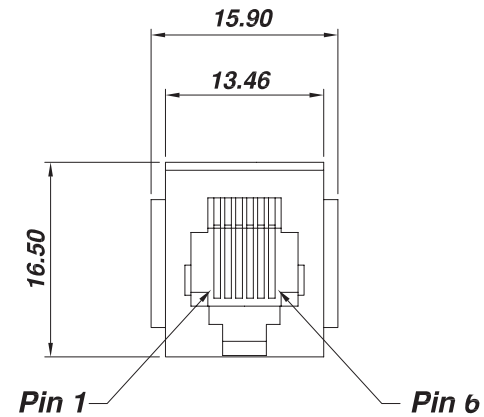



RoHS Compliant



PCB LAYOUT
(Top View)

AJ-012-6-X-X

B=6p2c, C=6p4c
D=6p6c

Gold
plated

1=15u , 4= 6 u
2=30u , 5= 2~3u
3=50u , 6= Flash

NOT SCALED
DRAWING

THIRD ANGLE PROJECTION

MM
INCH

TOLERANCE UNLESS
OTHERWISE NOTICE

LINEAR MM
INCH

ANGLE +0° 30'

INCH

.00±0.01
.000±0.005
.0000±0.002

RADII

MM

.00±0.25
.000±0.13
.0000±0.05

+0.45
-0.15

RJ11 TOP ENTRY PCB JACK

MODULAR JACKS ASSY FOR

AJ-012-6-X-XX