

Part No (Standard)	Part No (Ampere rating marked in white)	Rated Current	Housing Color	Voltage Drop	Rated Voltage
ATU-1A-NY	ATU-1A-NY-W	1A	Black	250 mV	32V
ATU-2A-NY	ATU-2A-NY-W	2A	Gray	225 mV	
ATU-3A-NY	ATU-3A-NY-W	3A	Violet	200 mV	
ATU-4A-NY	ATU-4A-NY-W	4A	Pink	200 mV	
ATU-5A-NY	ATU-5A-NY-W	5A	Tan	175 mV	
ATU-7.5A-NY	ATU-7.5A-NY-W	7.5A	Brown	150 mV	
ATU-10A-NY	ATU-10A-NY-W	10A	Red	140 mV	
ATU-15A-NY	ATU-15A-NY-W	15A	Blue	125 mV	
ATU-20A-NY	ATU-20A-NY-W	20A	Yellow	125 mV	
ATU-25A-NY	ATU-25A-NY-W	25A	Natural(white)	125 mV	
ATU-30A-NY	ATU-30A-NY-W	30A	Green	120 mV	32V
ATU-35A-NY	ATU-35A-NY-W	35A	Blue/Green	120 mV	
ATU-40A-NY	ATU-40A-NY-W	40A	Orange	120 mV	

ATU-XXA-NY(-W)

-W: Ampere rating white printed (白字印刷為客製品)

1.Housing Material: Nylon PA66
2.Terminal: Zinc alloy



振豐電子
2019.10.24
發行章

Note:

- 1.Voltage Rating:32 VDC
- 2.Interrupting Rating : 1000A @ 32 VDC
- 3.Operating temperature range -40°C to +105°C
- 4.Complies with: ISO 8820-3
- 5.RoHS Compliant

According to ISO 8820-3 standard specification
Electrical Characteristics

% of Rated Current	Operating time	
	min.	max.
110 %	100 h	---
135 %	0.75 s	1800 s
200 %	0.15 s	5 s
350 %	0.04 s	0.5 s
600 %	0.02 s	0.2 s

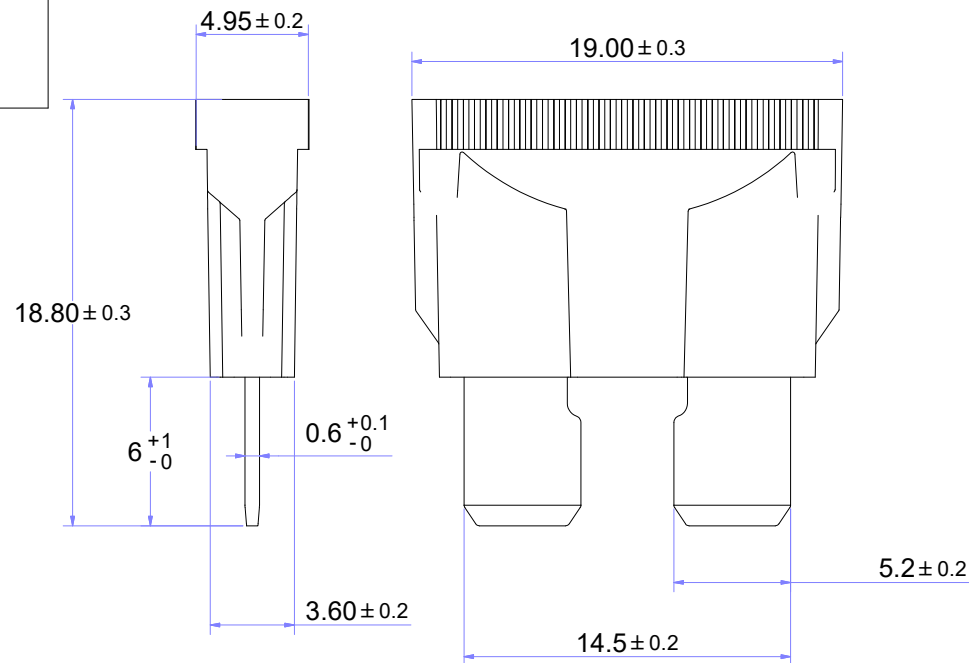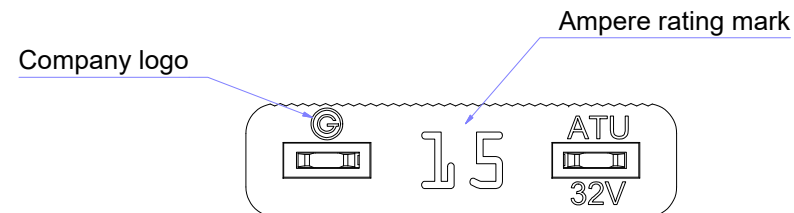

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR X±0.5 ±2° XX±0.25		CUSTOMER NO.	JENN FENG ELECTRIC INDUSTRIAL CO., LTD.
		DRAWN BY Tim	
DO NOT SCALE DRAWING		CHECKED BY 林進有	TITLE BLADE TYPE FUSE
		APPROVED BY 楊肇元	
P/N		DATE 2019/10/8	PART NO. ATU-NY(-W) series
REV	B	SCALE	DRAWING NO. BA19043002