

REV	ECN	NO.	DESCRIPTION	DATE
A			RELEASE	NOV. 20. 98
B			MODIFY DIM.	NOV. 22. 02

UL & CSA GRADE:

- *UL FILE NO.: E162690
- *CSA FILE NO.: LL103674
- *UL STYLE: 2651
- *TEMPERATURE RATING: -20°C TO +105°C
- *FLAMMABILITY RATING: UL-VW-1 CSA-FT1
- *VOLTAGE RATING: 300V


PHYSICAL PROPERTIES:

- *INSULATION MATERIAL: POLYVINYL CHLORIDE(PVC)
- *CONDUCTOR: #28AWG(7*0.127)STRAINED TINNED COPPER
- *COLOR: GREY WITH RED STRIP

ELECTRICAL:

- *IMPEDANCE: 100Ω
- *CAPACITANCE: 14.2pF/FT
- *INDUCTANCE: 14uH/FT
- *PROPAGATION DELAY: 1.43ns/FT
- *INSULATION RESISTANCE: 16Ω/M MIN

NOTE: NO. OF CONDUCTOR 10 TO 68

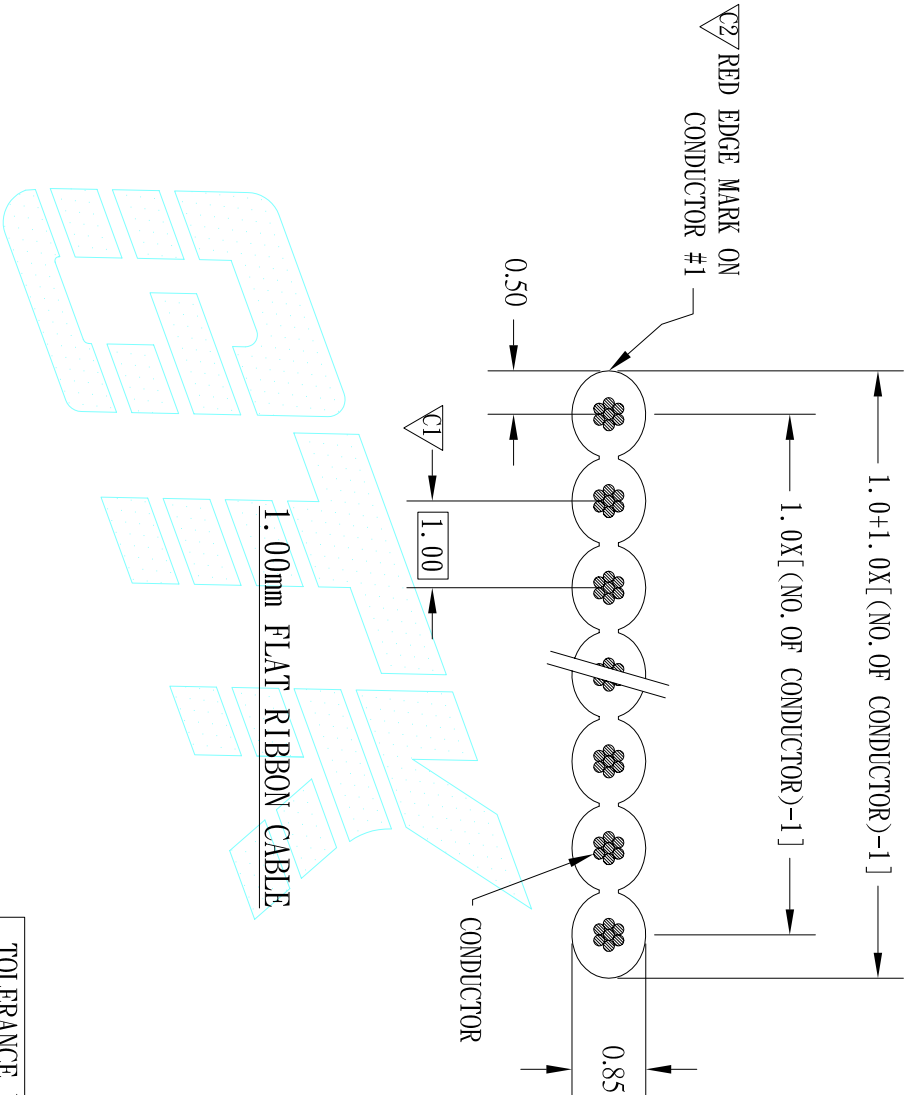

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE	UNITS	TITLE	PART NO.
X. ±	X°. ±	MM	1.00mm FLAT RIBBON CABLE	AWG28**H
X. ± 0.10	X°. ±	MM		
.XX ± 0.05	.XX°. ±	SCALE		
.XXX ±	.XXX°. ±	SCALE		
APPD			IPART NO	
CHKD		SIZE		
DRAW		A4		

NOTE:
1. DIMENSIONS MARKED  TO BE CHECKED BY GTK QC

圖面編號:GTKSD0028-B(1)