

## BAV19 ~ BAV21

### FEATURES :

- switching speed: max. 50 ns
  - For general purpose
  - This diode is also available in other case styles including: the MiniMELF case with the type designation BAV101 to BAV103, the SOT-23 case with the type designation BAS19 to BAS21
- \* Pb / RoHS Free


### MECHANICAL DATA :

**Case:** DO-35 Glass Case

**Weight:** approx. 0.13g

### SWITCHING DIODES

#### DO - 35 Glass (DO-204AH)

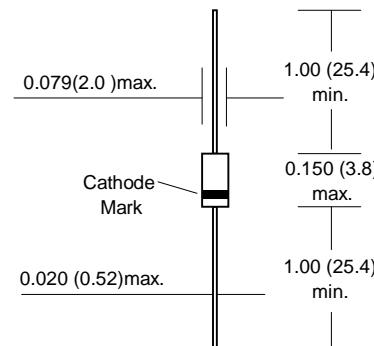

Dimensions in inches and ( millimeters )

### Maximum Ratings and Thermal Characteristics

(Rating at 25 °C ambient temperature unless otherwise specified.)

Parameter	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	120	V
BAV19		200	
BAV20		250	
Maximum Continuous Reverse Voltage	V <sub>RM</sub>	100	V
BAV19		150	
BAV20		200	
Maximum Rectified Current (Average) Half Wave Rectification with Resist. Load	I <sub>F(AV)</sub>	200	mA
Maximum Continuous Current <sup>(1)</sup>	I <sub>F</sub>	250	mA
Maximum Power Dissipation <sup>(1)</sup>	P <sub>D</sub>	500	mW
Maximum Repetitive Peak Forward Current <sup>(1)</sup>	I <sub>FRM</sub>	625	mA
Maximum Non-repetitive Peak Forward Current at t = 1s	I <sub>FSM</sub>	1.0	A
Maximum Junction Temperature <sup>(1)</sup>	T <sub>J</sub>	175	°C
Storage Temperature Range <sup>(1)</sup>	T <sub>S</sub>	-65 to + 175	°C


Note : (1) Valid provided that leads are kept at ambient temperature at a distance of 8mm from case.

### Electrical Characteristics (T<sub>J</sub> = 25°C unless otherwise noted)


Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Current	I <sub>R</sub>	V <sub>R</sub> = 100 V	-	-	100	nA
BAV19		V <sub>R</sub> = 150 V	-	-	100	
BAV20		V <sub>R</sub> = 200 V	-	-	100	
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 100 mA	-	-	1.0	V
Diode Capacitance	C <sub>d</sub>	f = 1MHz ; V <sub>R</sub> = 0	-	1.5	-	pF
Reverse Recovery Time	T <sub>rr</sub>	I <sub>F</sub> = 30mA , I <sub>R</sub> = 30mA I <sub>RR</sub> = 3mA , R <sub>L</sub> = 100 Ω	-	-	50	ns

## RATING AND CHARACTERISTIC CURVES ( BAV19 ~ BAV21 )


**FIG. 1 ADMISSIBLE FORWARD CURRENT VERSUS AMBIENT TEMPERATURE**

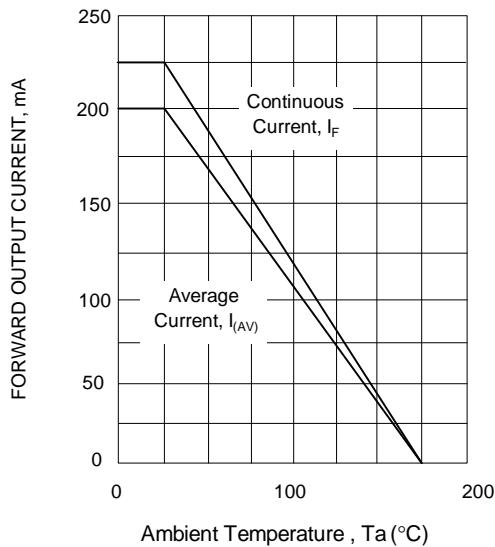

**FIG. 2 TYPICAL FORWARD VOLTAGE**

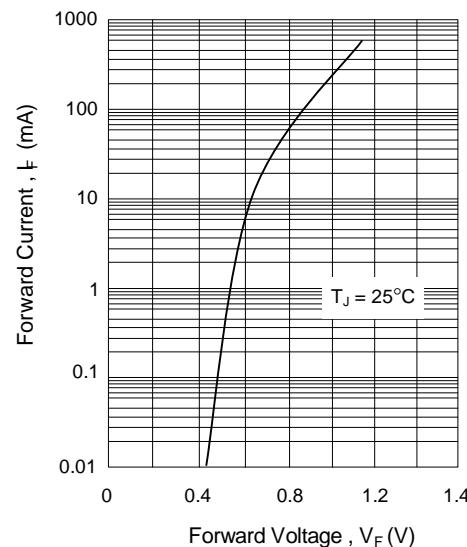

**FIG. 3 TYPICAL DIODE CAPACITANCE AS A FUNCTION OF REVERSE VOLTAGE**

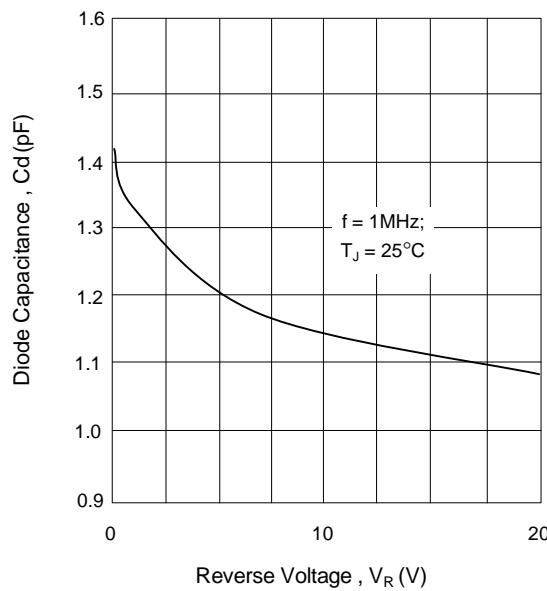

**FIG. 4 TYPICAL REVERSE CURRENT VERSUS JUNCTION TEMPERATURE**

