



RoHS

# Specification

Client Name :

客户名称 : \_\_\_\_\_

Client P/N :


客户品号 : \_\_\_\_\_

Product P/N :

产品型号 : HL-C3535K9W1EA(Ra1)-FC

Sending Date :

送样日期 : \_\_\_\_\_
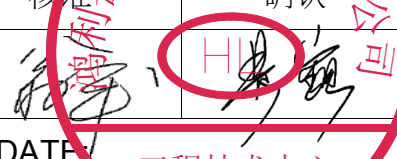
| Client approval<br>客户审核                  |                                              | Hongli ZhiHui approval<br>鸿利智汇审核                                                     |                                                                                      |                    |
|------------------------------------------|----------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------|
| Approval<br>核准                           | Audit<br>确认                                  | Approval<br>核准                                                                       | Audit<br>确认                                                                          | Confirmation<br>制作 |
|                                          |                                              |  |  | 赵明深                |
| <input type="checkbox"/> Qualified<br>接受 | <input type="checkbox"/> Disqualified<br>不接受 | DATE: <u>2017.07.01</u><br>日期: 2017.07.01                                            |                                                                                      |                    |

Adr : NO.1,Xianke Yi Road,Huadong Town,, Huadu District, Guangzhou, China

地址 : 中国广州市花都区花东镇先科一路1号

Tel/电话 : 020-86733333 Fax/传真 : 020-86733883 86733938 86733265

Web/网址 : www.honglitronic.com

注:1. 此规格书以中英文方式书写,若有冲突以中文版本为准文本.

2. 此规格书的最终解释权归鸿利智汇集团股份有限公司

3. 此规格书的有效期限为两年,自盖章或签字之日起计算,期满时双方可以续签协议,但应采用书面形式



## Catalog目录


|                                                             |       |
|-------------------------------------------------------------|-------|
| <b>1. Product naming rules</b>                              |       |
| 产品命名规则                                                      | 3     |
| <b>2. Features</b>                                          |       |
| 特点                                                          | 3     |
| <b>3. Application range</b>                                 |       |
| 应用范围                                                        | 4     |
| <b>4. Radiation Pattern</b>                                 |       |
| 辐射模式                                                        | 4     |
| <b>5. Specifications</b>                                    |       |
| 规范                                                          | 5-7   |
| <b>6. Product bins</b>                                      |       |
| 产品分级                                                        | 7     |
| <b>7. Typical Optical/Electrical Characteristics Curves</b> |       |
| 典型光学/电性特征曲线                                                 | 8-9   |
| <b>8. Package Dimensions</b>                                |       |
| 封装尺寸                                                        | 10    |
| <b>9. Welded plate and steel mesh Dimensions</b>            |       |
| 焊盘及钢网尺寸                                                     | 10    |
| <b>10. Label</b>                                            |       |
| 标签                                                          | 11    |
| <b>11. Tape Specifications</b>                              |       |
| 包装规格                                                        | 12    |
| <b>12. Reflow soldering instructions</b>                    |       |
| 回流焊说明                                                       | 13    |
| <b>13. Use the matters needing attention</b>                |       |
| 使用注意事项                                                      | 14-15 |
| <b>14. Resume</b>                                           |       |
| 履历表                                                         | 16    |



## Product naming rules 产品命名规则

HL-C 3535 K9 W 1 E A (Ra1) -FC  
1 2 3 4 5 6 7 8 9 10

- 1：鸿利光电代码
- 2：产品系列代码
- 3：尺寸代码
- 4：芯片代码
- 5：表示发光颜色为白光
- 6：表示使用350mA分光
- 7：模具代码
- 8：基板材质代码
- 9：表示Ra≥70
- 10:倒装芯片

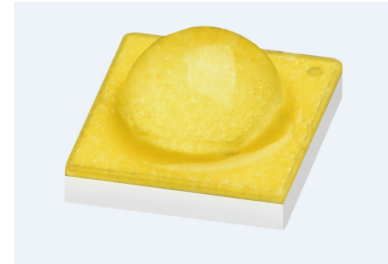

**ATTENTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
DISCHARGE  
SENSITIVE  
DEVICES

## Features 特点



- Long operating life 寿命长
- High flux 光通量高
- More energy efficient 节能
- Low voltage DC operated 低电压直流工作
- Cool beam, safe to the touch 冷光源，接触安全
- Instant light (less than 100ns ) 瞬间点亮（小于100ns）
- No UV 无紫外线
- Flip Chip Technology 倒装芯片工艺
- RoHS compliant 符合RoHS标准



## Application range 应用范围

- Portable lightings /(flash lightings, bicycle)便携式照明
- Street light 路灯
- Working light 工作灯
- General lighting通用照明
- Industrial lighting 工业照明

## Radiation Pattern辐射模式

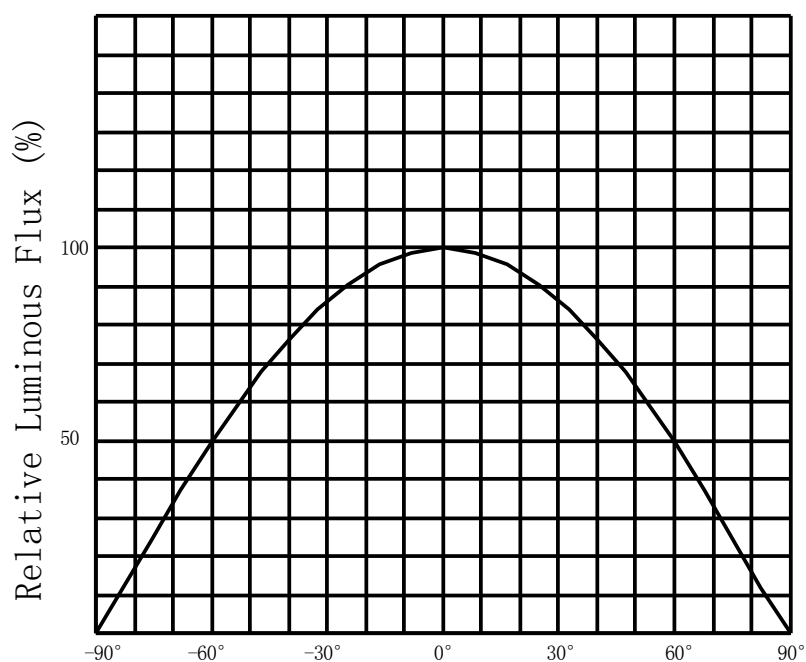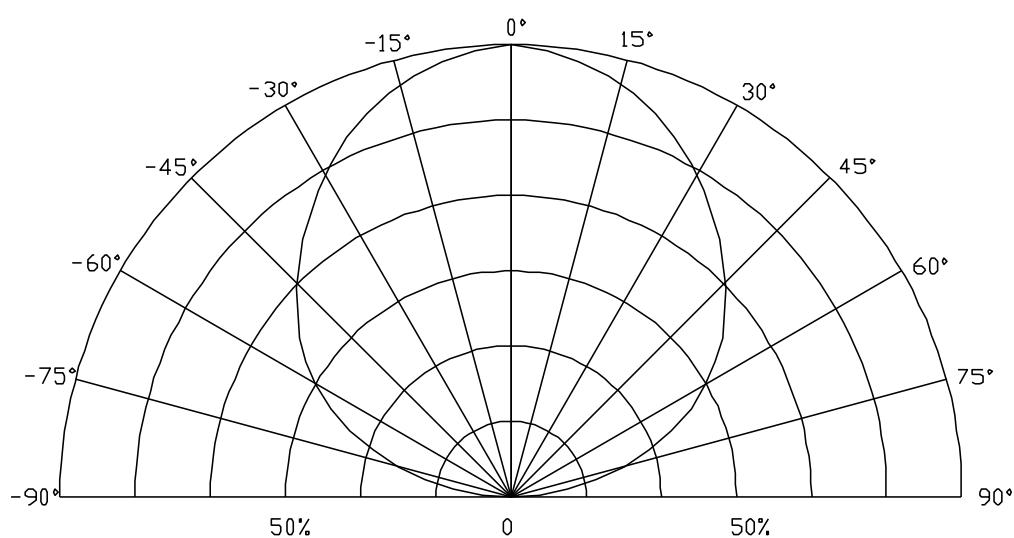

## Specifications规范

### (1) Absolute Maximum Ratings at Ta=25°C

在25°C时绝对极限条件

| Parameter参数                      | Symbol符号       | Rating 值                                 | Units单位 |
|----------------------------------|----------------|------------------------------------------|---------|
| Input power 输入功率                 | Pi             | 4.5                                      | W       |
| Forward Current 正向电流             | I <sub>F</sub> | 1500                                     | mA      |
| Reverse Current 反向漏电流            | I <sub>R</sub> | 3@5V                                     | uA      |
| Junction Temperature 结温          | Tj             | 145                                      | °C      |
| View Angle (FWHM)-White 发光角度     | —              | 120~140                                  | degrees |
| Operating Temperature Range 工作温度 | Topr           | -35°C To +100°C                          |         |
| Storage Temperature Range 储藏温度   | Tstg           | -40°C To +100°C                          |         |
| ESD Sensitivity (HBM) 抗静电能力      | ESD            | Class 1                                  |         |
| Reverse voltage (反向电压)           | Vr             | not designed for reverse bias<br>不允许反向工作 |         |

### Notes注:

1.\* All high power emitter LED products mounted on aluminum metal-core printed circuit board, can be lighted directly, but we do not recommend lighting the high power products for more than 5 seconds without a appropriate heat dissipation equipment. When using at 1200mA, TS (cathode point) temperature should be controlled below 85°C .

所有高功率的发光LED产品安装在铝金属为核心印刷电路板，可直接点亮，但我们不建议在没有一个适当的散热设备时，照明高功率LED点亮超过5秒，当产品为1200mA使用，TS点（负极焊盘）温度控制在85°C 以下。

2.wave peak and soak-stannum soldering etc.is not suitable for this products.

波峰焊、浸锡焊接不适合这个产品。

3.Reflow soldering should not be done more than two times.The reflow temperature we recommend is 260°C,When the temperature exceeds 260 °C, the product failure of LED can be caused

回流焊不能超过两次,回流焊最高温度建议260°C，当温度超过260°C极大可能引起LED产品失效。

## (2) Optical Characteristics at Ta=25°C

在Ta=25°C 时的典型光学特性

| HL-C3535K9W1EA(Ra1)-FC (IF=350mA) |               |            |         |          |          |          | IF=700mA |          | IF=1200mA |          |
|-----------------------------------|---------------|------------|---------|----------|----------|----------|----------|----------|-----------|----------|
| Main push                         | Center Tc (K) | Tc (K)     | Ra      | Min (lm) | Typ (lm) | Max (lm) | Min (lm) | Max (lm) | Min (lm)  | Max (lm) |
|                                   | 2200          | 2000-2400  | 70(min) | 130      | 140      | 160      | 260      | 300      |           |          |
|                                   | 2725          | 2580-2870  | 70(min) | 140      | 155      | 175      | 270      | 310      |           |          |
| ★                                 | 3045          | 2870-3220  | 70(min) | 140      | 150      | 170      | 270      | 310      |           |          |
|                                   | 3710          | 3465-3985  | 70(min) | 140      | 160      | 180      | 280      | 320      |           |          |
| ★                                 | 3985          | 3710-4260  | 70(min) | 150      | 160      | 180      | 280      | 320      |           |          |
|                                   | 4503          | 4260-4745  | 70(min) | 150      | 160      | 180      | 280      | 320      |           |          |
|                                   | 5028          | 4745-5310  | 70(min) | 155      | 165      | 185      | 285      | 325      | 490       | 530      |
| ★                                 | 5665          | 5310-6020  | 70(min) | 160      | 170      | 190      | 290      | 330      | 460       | 530      |
|                                   | 6530          | 6020-7040  | 70(min) | 160      | 170      | 190      | 290      | 330      |           |          |
|                                   | 10000         | 8000-12000 | 70(min) | 150      | 160      | 180      | 280      | 320      |           |          |

### Notes注:

\*1.the products after this specification refer to the parameters prevail, before the release of specification without refer to the above parameters.

此规格书发布日后生产的产品以上述参数为准，发布前生产的库存品不参考上述参数。

2.Tolerance of measurement of forward voltage $\pm 3\%$ 、Color-rendering index $\pm 2$ 、luminous flux $\pm 5\%$

不同标准源测试存在仪器公差：正向电压公差为 $\pm 3\%$ 、显指公差为 $\pm 2$ 、光通量公差为 $\pm 5\%$ 。

3.The CCT at IF=700mA value will be raised 3%.

IF=700mA时色温会上升约3%。

4. With “★” for the product the main push color segment.

带“★”为产品主推色温段。

## (3) Optical Electrical /Thermal Characteristics at Ta=25°

在Ta=25°C 时典型的电学/热学特性

| IF (mA) | VF (V) | R (j-s) (°C/W) | Po (W) |
|---------|--------|----------------|--------|
| 350     | 2.85   | 2.3            | 0.998  |
| 700     | 3.0    | 2.57           | 2.1    |
| 1000    | 3.07   | 2.79           | 3.07   |
| 1200    | 3.11   | 3.1            | 3.73   |




## Product bins 产品分级

### (1) Forward Voltage bins 电压分级

| Min (V) | Max (V) |
|---------|---------|
| 2.6     | 2.8     |
| 2.8     | 3.0     |
| 3.0     | 3.2     |
| 3.2     | 3.4     |

### (2) Chromaticity bins 色温分级

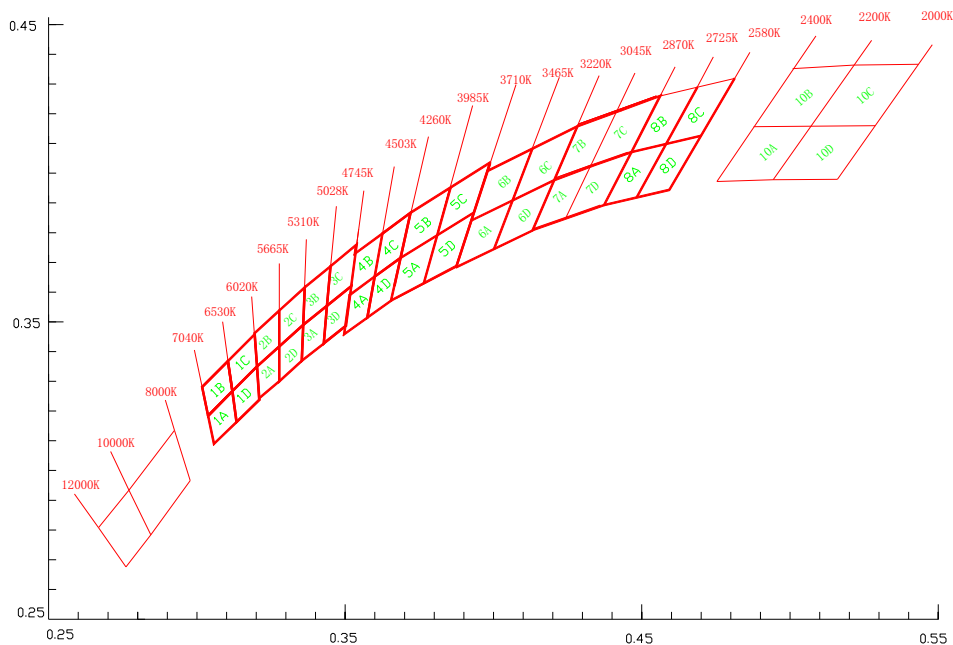

|      |                |                |               |                |                |                |
|------|----------------|----------------|---------------|----------------|----------------|----------------|
| 色温中心 | 2200K          | 2725K          | 3045K         | 3710K          | 3985K          | 4503K          |
| X, Y | 0.507, 0.4148  | 0.4582, 0.4098 | 0.4338, 0.403 | 0.3945, 0.386  | 0.3818, 0.3797 | 0.3615, 0.3659 |
| 色温中心 | 4745K          | 5028K          | 5665K         | 6020K          | 6530K          | 10000K         |
| X, Y | 0.3531, 0.3607 | 0.3447, 0.3553 | 0.329, 0.3417 | 0.3214, 0.3359 | 0.3129, 0.329  | 0.2785, 0.2883 |

#### Notes 注:

\*1. Products are tested and binned at a transient forward current (IF) with 350mA. With the use of different IF, it may probably cause differences in CCT & forward voltage. Generally, with the increase of IF, the CCT will be raised as well.

该产品通过瞬态350mA点亮, 分光分色. 若使用不同电流, 可能会引起色温及电压的变化, 一般情况下, 使用电流增加, 色温会上升。

2. Tolerance of  $\pm 0.005$  on x, y coordinates.

色坐标的测量误差允许在 $\pm 0.005$


3. The chromaticity center refers to ANSI C78.377-2008

色温分bin参考ANSI C78.377-2008




## Typical Optical/Electrical Characteristics Curves 典型光学/电性特征曲线 ( $T_s=85^\circ\text{C}$ Unless Otherwise Noted ) ( $T_s=85^\circ\text{C}$ 除非另有注释)

辐射模式 IF=700mA

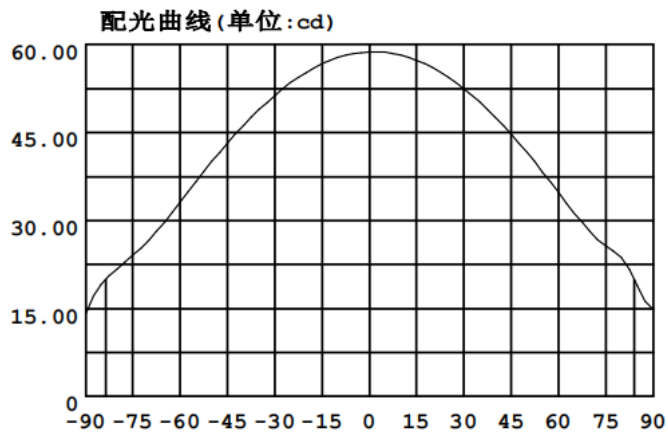


光谱曲线 IF=700mA

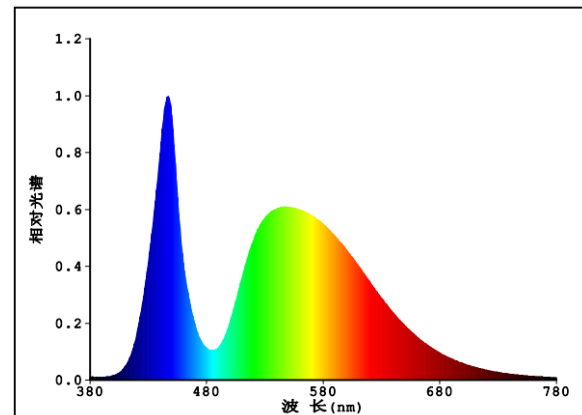


电流-正向电压曲线

IF - VF

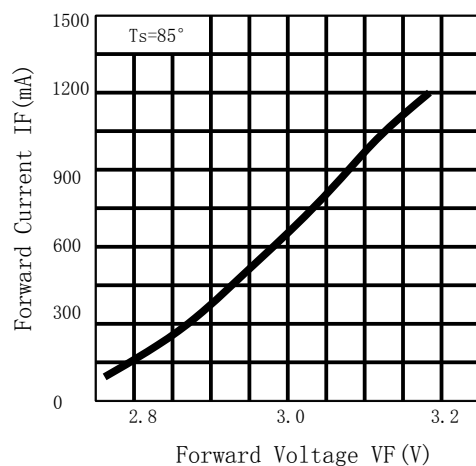


电流-相对光通量曲线

Relative Luminous Flux - IF

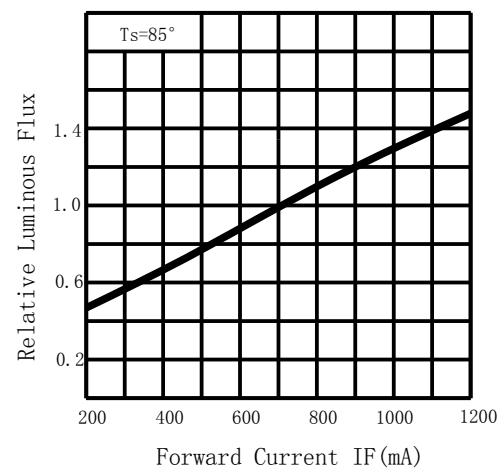

电流-色坐标漂移曲线


$\Delta C_x, \Delta C_y$  - IF

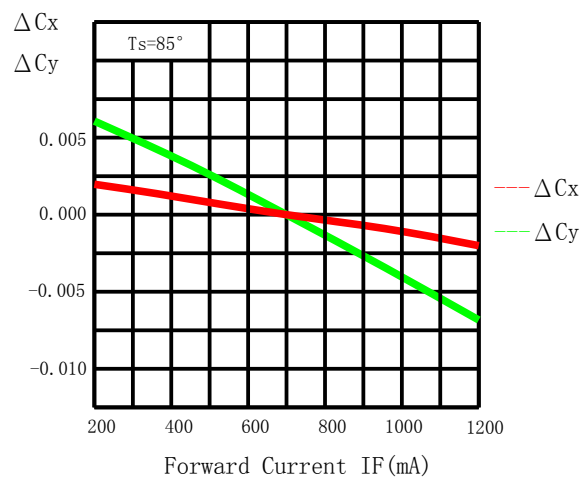

## Typical Optical/Electrical Characteristics Curves 典型光学/电性特征曲线 ( $T_a=85^{\circ}\text{C}$ Unless Otherwise Noted ) ( $T_a=85^{\circ}\text{C}$ 除非另有注释)


温度-正向电压曲线

$T_s - V_F$

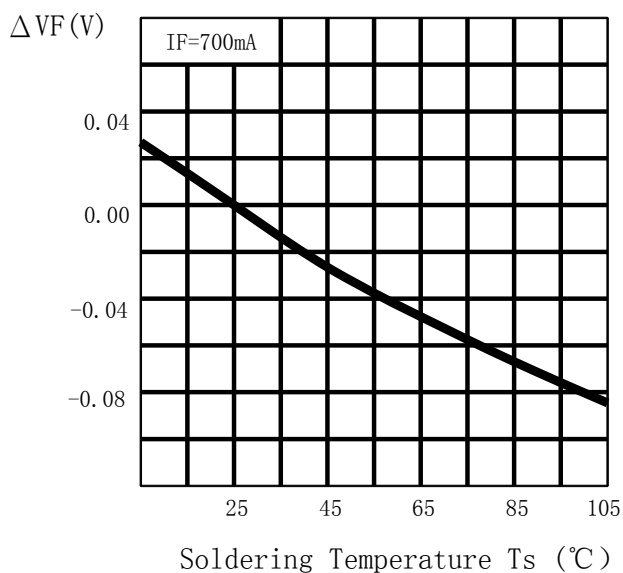


温度-相对光通量曲线

Relative Luminous Flux -  $T_s$

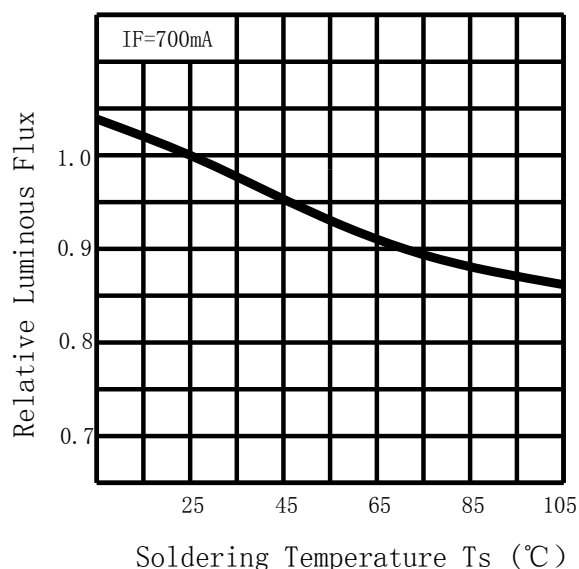


温度-色坐标漂移曲线

$\Delta C_x, \Delta C_y - T_s$

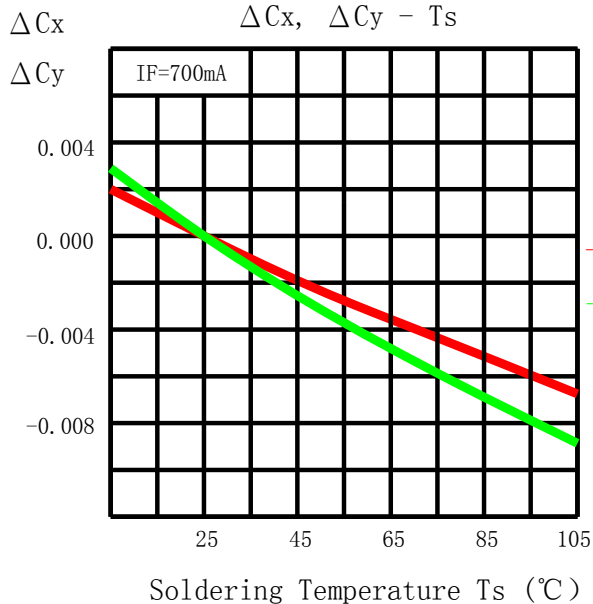


温度-最大允许操作电流

Allowable Forward Current -  $T_s$

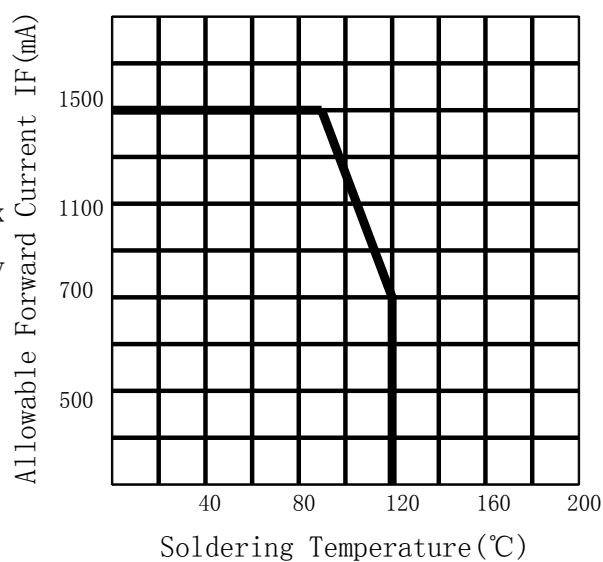


## Package Dimensions封装尺寸

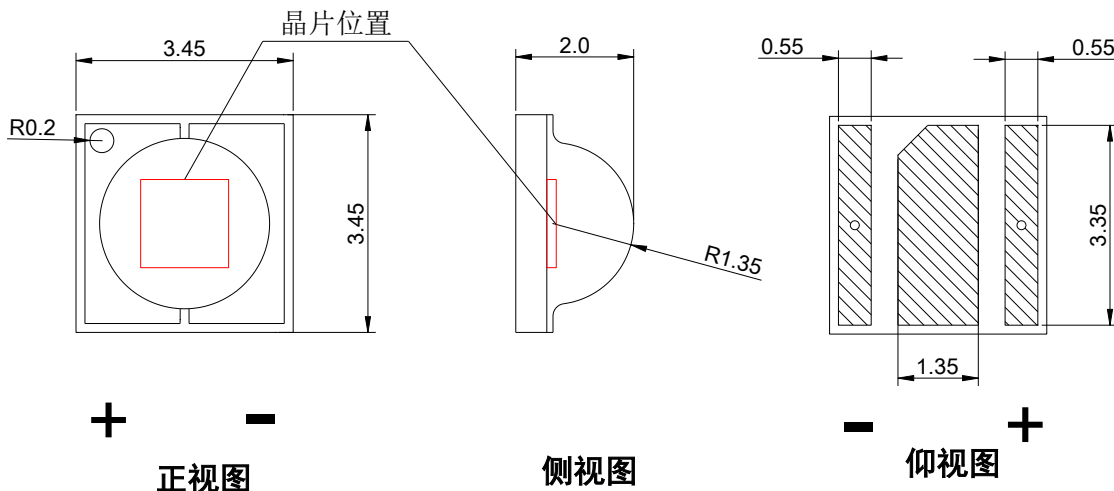

### Notes注:

1. All dimension units are millimeters.  
所有尺寸单位均为毫米。
2. All dimension tolerance is  $\pm 0.1\text{mm}$  unless otherwise noted.  
所有尺寸误差是 $\pm 0.1$ 毫米除非另有说明

## Welded plate and steel mesh Dimensions 焊盘及钢网尺寸

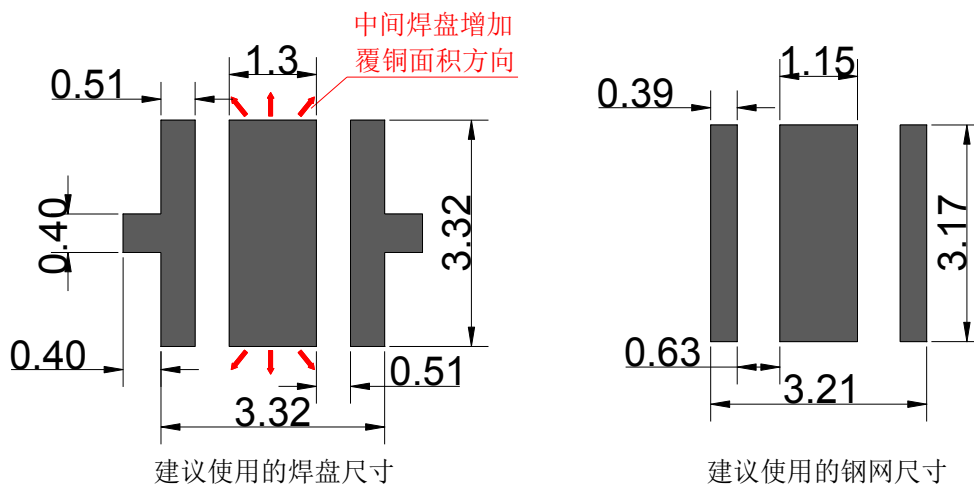

### Notes注:

When the circuit configuration is not affected, suggested the increase in the middle of the copper area, or the connection between the middle and the pad and the negative electrode can improve the cooling performance of the product.

在不影响电路配置时，建议增加中间焊盘覆铜区域，或中间焊盘和负极焊盘连接，能提高产品散热性能。

## Label 标签

TYPE: XXXXXXXXXX

产品型号

QTY: XXXXX

包装数量

VF: Forward voltage rank

正向电压档次范围

ΦV: Luminous Flux rank

光通量档次范围

IF: XXXX

分选电流

TC: Color temperature

色温

DATE: XXXX

生产日期

LOT.NO: Lot Number

生产批号


|                                                                                                                 |         |             |
|-----------------------------------------------------------------------------------------------------------------|---------|-------------|
|  <b>HONGLITRONIC</b><br>鸿利光电 |         | <b>RoHS</b> |
| TYPE:                                                                                                           |         | QTY:        |
| VF:                                                                                                             | IF:     | ΦV:         |
| TC:                                                                                                             | X/Y:    |             |
| SDCM<                                                                                                           | Ra>     |             |
| DATE:                                                                                                           | LOT.NO: |             |



|                   |   |
|-------------------|---|
| Under Development |   |
| Mass production   | ● |

## Tape Specifications(Units:mm)包装规格

### (1)Reel package ( 1000 pcs/reel) 卷轴包装 ( 1000 pcs/卷)

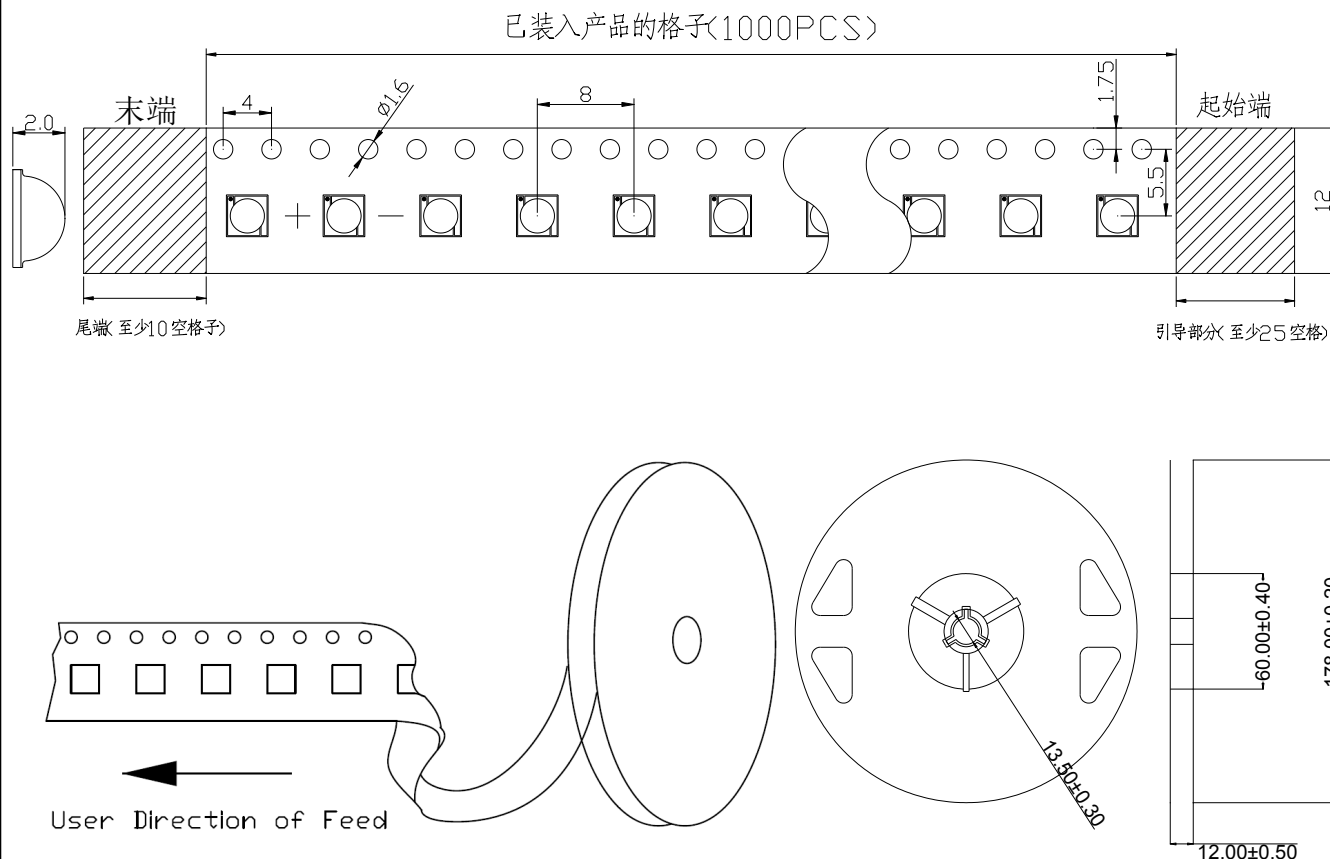


### (2)Moisture resistant packaging 防潮包装





## Reflow soldering instructions 回流焊说明

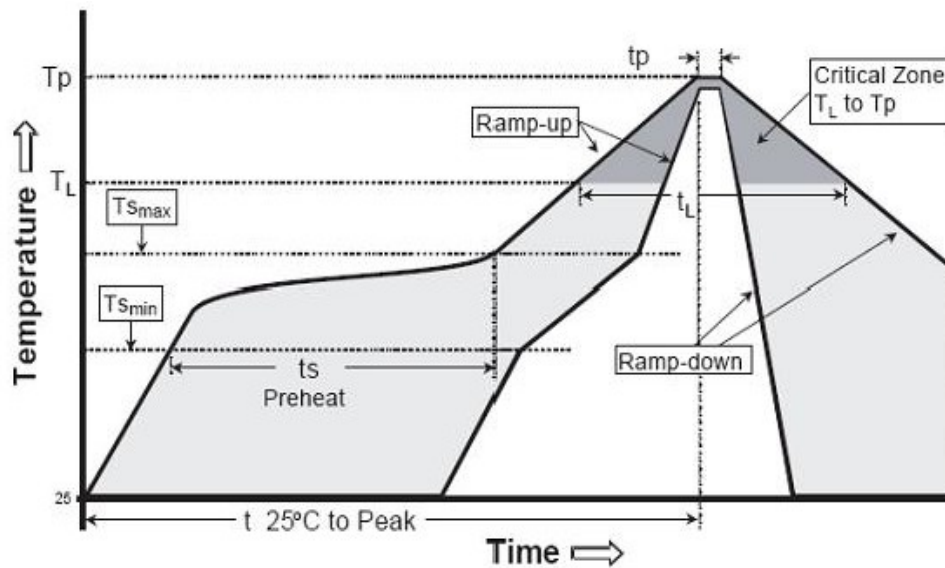

| Profile Feature                                         | Lead-Based solder | Lead-Free Solder |
|---------------------------------------------------------|-------------------|------------------|
| Average Ramp-Rate (Ts <sub>max</sub> to Tp)             | 3°C/second max    | 3°C/second max   |
| Preheat: Temperature Min (Ts <sub>min</sub> )           | 100°C             | 150°C            |
| Preheat: Temperature Max (Ts <sub>max</sub> )           | 150°C             | 200°C            |
| Preheat: Time (ts <sub>min</sub> to ts <sub>max</sub> ) | 60-120 seconds    | 60-180 seconds   |
| Time Maintained Above: Temperature (TL)                 | 183°C             | 217°C            |
| Time Maintained Above: Time (tL)                        | 60-150 seconds    | 60-150 seconds   |
| Peak/Classification Temperature (Tp)                    | 215°C             | 260°C            |
| Time Within 5°C of Actual Peak Temperature (tp)         | 10-15 seconds     | 20-40 seconds    |
| Ramp-Down Rate                                          | 6°C/second max    | 6°C/second max   |
| Time 25°C to Peak Temperature                           | 6 minutes max     | 8 minutes max    |

Note:

1. recommend to use a convection type reflow machine with 8 zones.  
建议使用八温区回流焊机。
2. recommend to use Lead-Free Paste with a melting point between 170°C-180°C.  
建议使用熔点为170°C-180°C的无铅锡膏。
3. the reflow soldering time should not be more than 400s.  
总的回流焊时间不要超过400s。
4. all temperature means the temperature measured on the surface of the package body.  
所有温度均指在封装本体表面上测得的温度。
5. When using hot plate, the temperature is no more than 260 °C, the time is not more than 10seconds.  
当使用热板作业时，温度不超过260°C，时间不超过10秒。



## Use the matters needing attention(使用注意事项 )

### 一、储存(storage)：

为避免受潮的影响，我司建议产品在未开包装前储存条件为 5-30℃，相对湿度小于 60%；已开包装的 LED 光源请在 24H 内使用安装完毕，如未用完之产品，请进行除湿并抽真空后密封保存。开封超过一周或湿度卡发生变化时，请务必进行除湿，除湿条件：60℃±5℃，12H；产品密封保存有效使用期为一年。

To avoid moisture, we recommend storage conditions for the unopened LED +5 ~ +30 °C, relative humidity <60%. LED should be used within 24Hrs. of opening the package. Please make sure to dehumidify and vacuum pack the remaining/ unused LED. Dehumidifying condition: +60 ° C ± 5 ° C, 12 Hrs. Effective age for the sealed led is one year.

### 二、组装注意事项(the assembly notes)：

焊接条件：此产品必须使用回流焊接的作业方式,回流曲线最高温度不可超过 260℃.作业或存放过程中不可有 1000g 以上的外力或尖锐物体作用于透镜表面（如压力，摩擦等外力以及钳子镊子等工具），以免造成元件损伤；如果超出此使用条件，鸿利智汇将不能保证产品的稳定性，如需使用超出的操作条件，请务必进行风险评。

Soldering Conditions：This product must be used reflow soldering practices, the maximum temperature of reflow should not exceed 260°C.Please make sure when soldering, there is no external force on the soldering surface (such as pressure, friction or sharp metal nails, etc.), to avoid gold wire deformation or damage and other abnormalities. If beyond recommended conditions, we cannot guarantee the LED stability, please do the risk assessment first.

### 三、防静电措施(anti-Static Measures)：

请采取足够的措施来防止静电产生，比如带静电环或防静电手指套等；每个制造工程关于产品（工厂、设备、机器、载波机和运输单位）应当连接地面，避免产品电气带电。

Please take adequate measures to prevent electrostatic generation, such as wearing electrostatic ring or anti-static fingerstall etc; any relative products like plant equipment, machinery, carrier and transportation units shall be connected to discharging unit/ ground. After assembly, please make sure to discharge Static Electricity with proper ESD equipment.

### 四、温度控制(temperature Control)：

保证散热前提条件为：TS点（负极焊盘）为85摄氏度以下，在此温度以下，散热符合产品寿命要求；为确保在组装时降低接触热阻，请注意在组装过程中，散热片采用良好品质的导热膏涂布均匀且分布面积合理，不可出现太少或高低不平等现象。散热介质需保证电介质耐压测试至少通过500V。

Recommended temperature conditions for enhanced product life: TS (Cathode Point) is <85°C . During assembly, please ensure that a good quality thermal paste is applied and distributed evenly over the surface. While using thermal pad (Heat Sink), make sure LED is firmly tightened and there is no gap between surfaces. The need to ensure the cooling medium dielectric withstand test at least through 500V.



### 五、驱动控制(drive control)：

本产品需使用恒流源进行驱动，且输出电流符合规格书上的功率使用范围，如需使用恒压源或其他使用条件，请进行使用效果风险评估。

Drive this product at constant current. Output current range specifications should be according to the operational and other conditions, as mentioned in data sheet. Before using a constant voltage source or altered specifications, other than recommended, please consider risk factors.

### 六、其他(other)：

本产品不可在以下条件下使用，如果产品在以下条件下使用，评估其使用效果和风险是有必要的：


- 直接或间接的打湿或受潮，比如淋雨等；
- 被海水损害或侵蚀；
- 被暴露于腐蚀性气体(如  $Cl_2$ 、 $H_2S$ 、 $NH_3$ 、 $SO_x$ 、 $NO_x$ 等)；
- 被暴露于粉尘、液体或油；
- 符合使用手册情况下，产品质保期为24个月，有保质协议的则以保质协议为准；
- 产品生命周期后进行回收处理。

Product is not suitable to use in following conditions;

- Direct or indirect wet / damp conditions, such as rain, etc;
- in contact with sea water and erosive materials;
- Exposed to corrosive gases (e.g.,  $Cl_2$ ,  $H_2S$ ,  $NH_3$ ,  $SO_x$ ,  $NO_x$ , etc.);
- Exposed to dust, liquids or oils;
- In accordance with the user manual, the product shelf life is 24 months, If there is a warranty agreement, the warranty agreement shall prevail;
- After the product life cycle for recycling.



OK

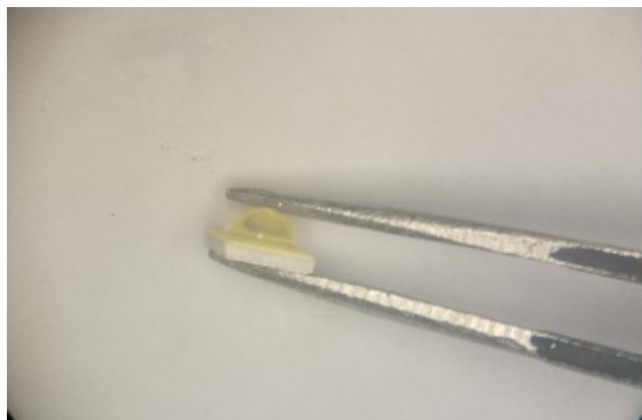

NG



| 修订次数 | 修订人 | 修订内容                            | 修订日期         | 版次  |
|------|-----|---------------------------------|--------------|-----|
| 1    | 郭汝航 | 新建文件                            | 2017. 07. 01 | A/0 |
| 2    | 王芝烨 | 新增700mA测试数据                     | 2019. 01. 22 | A/1 |
| 3    | 赵明深 | 新增3465K规格                       | 2019. 07. 01 | A/2 |
| 4    | 冉东  | 新增5310-6020K/1200mA光通量460-530lm | 2019. 11. 15 | A/2 |
| 5    |     |                                 |              |     |
| 6    |     |                                 |              |     |
| 7    |     |                                 |              |     |
| 8    |     |                                 |              |     |
| 9    |     |                                 |              |     |
| 10   |     |                                 |              |     |
| 11   |     |                                 |              |     |
| 12   |     |                                 |              |     |
| 13   |     |                                 |              |     |
| 14   |     |                                 |              |     |
| 15   |     |                                 |              |     |
| 16   |     |                                 |              |     |
| 17   |     |                                 |              |     |
| 18   |     |                                 |              |     |
| 19   |     |                                 |              |     |
| 20   |     |                                 |              |     |
| 21   |     |                                 |              |     |
| 22   |     |                                 |              |     |
| 23   |     |                                 |              |     |
| 24   |     |                                 |              |     |
| 25   |     |                                 |              |     |
| 26   |     |                                 |              |     |