

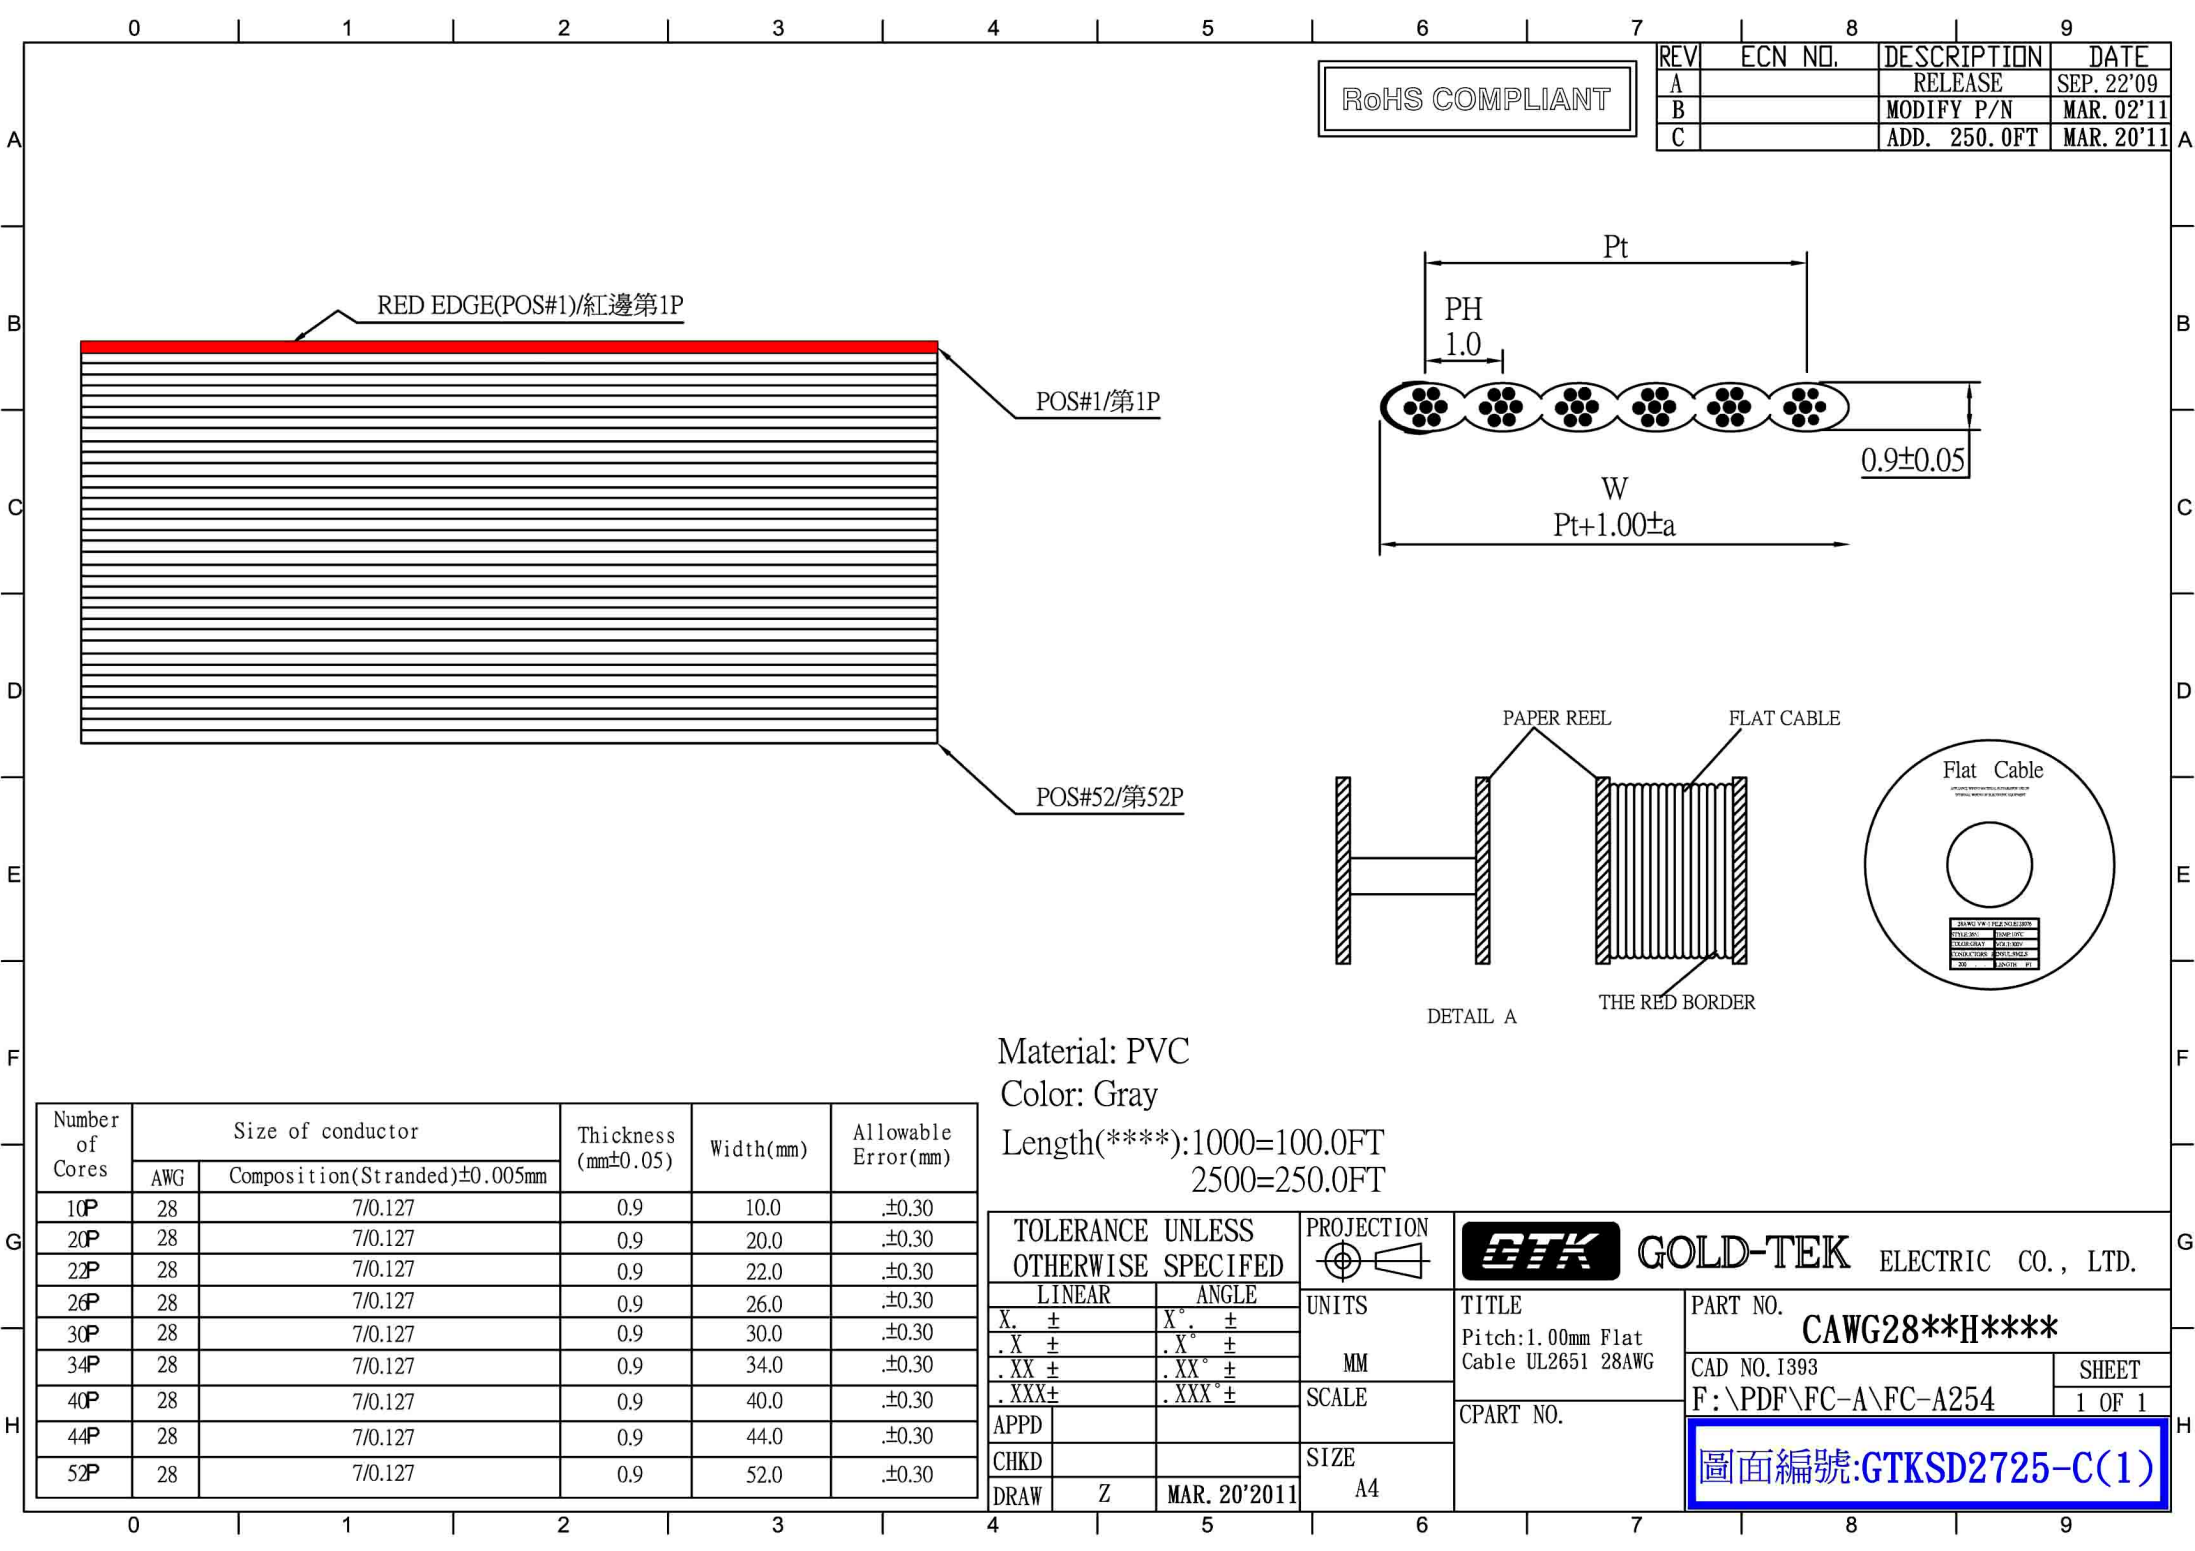


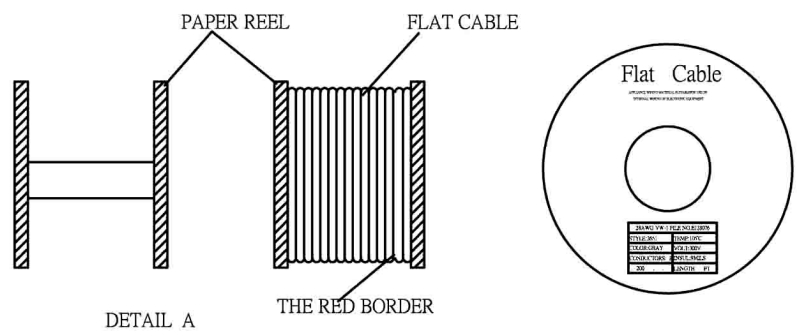

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	SEP. 22'09
B		MODIFY P/N	MAR. 02'11
C		ADD. 250.0FT	MAR. 20'11

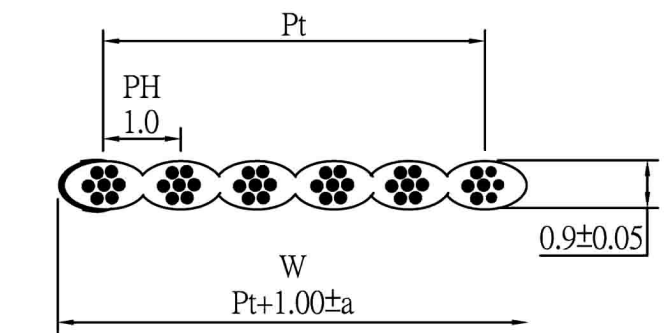

Number of Cores	Size of conductor		Thickness (mm±0.05)	Width(mm)	Allowable Error(mm)
	AWG	Composition(Stranded)±0.005mm			
10P	28	7/0.127	0.9	10.0	±0.30
20P	28	7/0.127	0.9	20.0	±0.30
22P	28	7/0.127	0.9	22.0	±0.30
26P	28	7/0.127	0.9	26.0	±0.30
30P	28	7/0.127	0.9	30.0	±0.30
34P	28	7/0.127	0.9	34.0	±0.30
40P	28	7/0.127	0.9	40.0	±0.30
44P	28	7/0.127	0.9	44.0	±0.30
52P	28	7/0.127	0.9	52.0	±0.30

Material: PVC
Color: Gray
Length(***):1000=100.0FT
2500=250.0FT

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION		 GOLD-TEK ELECTRIC CO., LTD.		
LINEAR		ANGLE	UNITS	TITLE Pitch:1.00mm Flat Cable UL2651 28AWG	PART NO. CAWG28**H****		
X. ±	X° ±	MM			CAD NO. I393		SHEET
.X ±	.X° ±				F:\PDF\FC-A\FC-A254		1 OF 1
.XX ±	.XX° ±				SCALE		
.XXX±	.XXX°±	SCALE	CPART NO.	圖面編號:GTKSD2725-C(1)			
APPD			SIZE				
CHKD			A4				
DRAW	Z	MAR. 20'2011					