

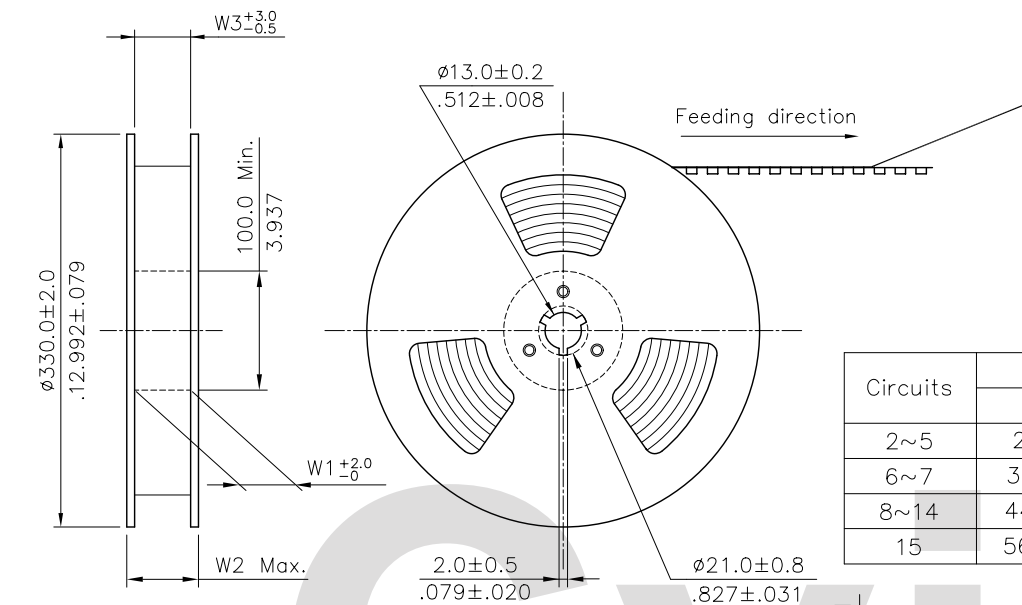
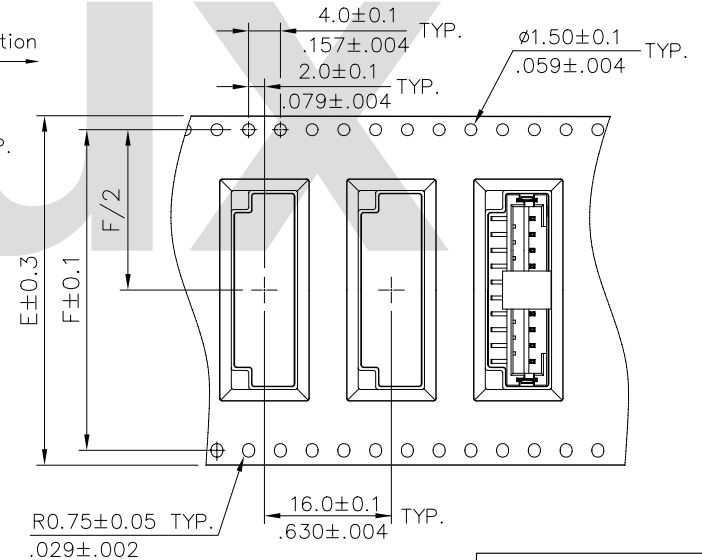


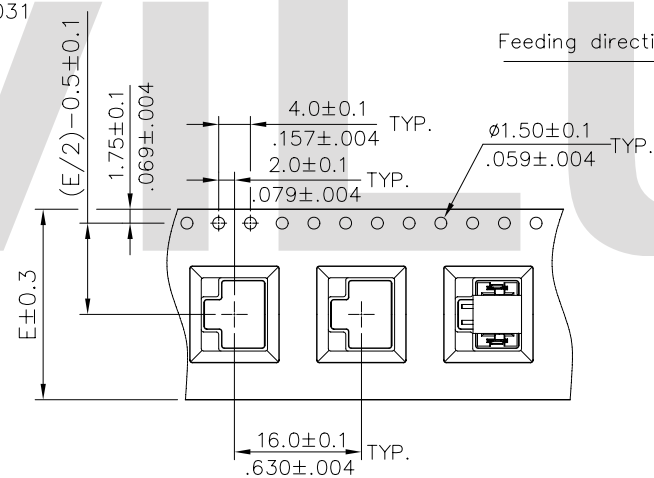

NOTE :

- * Reel Material : HIPS
- * Carrier Material : Transparent Anti-static Polysyrene.
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 requirements.
- * Quantity : 500 PCS/Reel

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
2~5	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
6~7	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
8~14	44.0(1.732)	40.40(1.596)	44.4(1.748)	50.4(1.984)	44.4(1.748)	5
15	56.0(2.205)	52.40(2.062)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

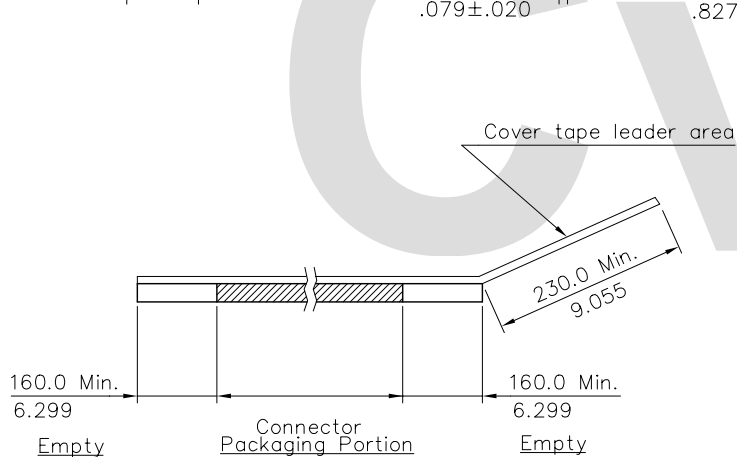

WIDTH : 24 mm Carrier

WIDTH : 32,44,56 mm Carrier

RoHS Compliant



5	Sun	9/26/08'	ECR08066-2/ECN08481		DATE	UNIT: mm / inch		TITLE: 2.00mm PITCH TOP ENTRY SMT HEADER	 瀚荃股份有限公司 CviLux Corporation				
4	Sandy	3/7-08'	ECN08131	DRAWN BY:	Sun	9/26-08'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
3	Sandy	4/29-07'	ECN07153	ENGINEER:	Eisley	10/07-08'	.X ±	X' ± 1"	MATERIAL:	DRAWING NO.	CI0134SD	PART NO.	CI01**M1V*0
2	Sandy	4/12/06'	ECN06122	CHECKED BY:	David	10/07-08'	.XX ±	.X' ±		FINISH:	SCALE		SHEET
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/07-08'	.XXX ±	.XX' ±					