



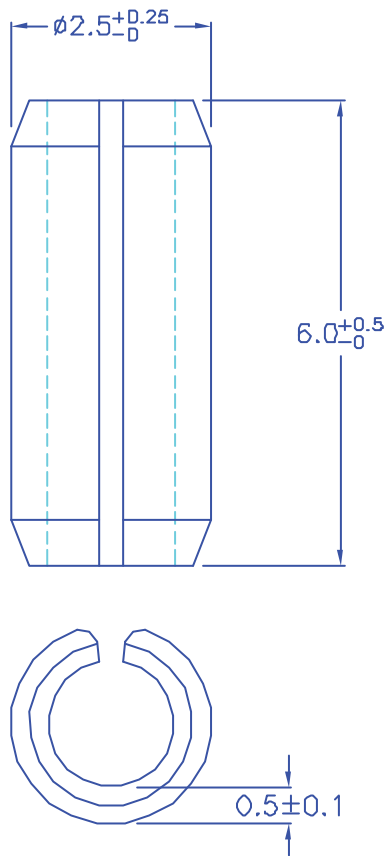


© ROHS compliant


DRAW NO. PGAS006596 C GJS

TOLERANCE: L≤10 ±0.2 10<L≤30 ±0.3 30<L≤50 ±0.5 50<L≤100 ±0.7 100<L≤250 ±1.2 ABOVE 250 ±1.5			APPROVED BY		張道陽	2007.04.11.	PG 品固企業股份有限公司 品基電子(東莞)有限公司 蘇州品基電子科技有限公司 鑽隆有限公司 PINGOOD ENTERPRISE CO.,LTD.			
			REVIEWED BY		謝怡嘉	2007.04.11.				
			DRAWN BY		張博欽	2007.04.11.				
			MATERIAL: 鋼片							
UNIT mm SCALE			PART NAME:				A SIZE		REV.	
									3	
UNIT mm SCALE			PART NO:				CP-MPIN		SHEET 1 OF 1	

EF0404505

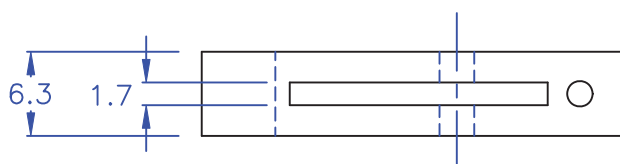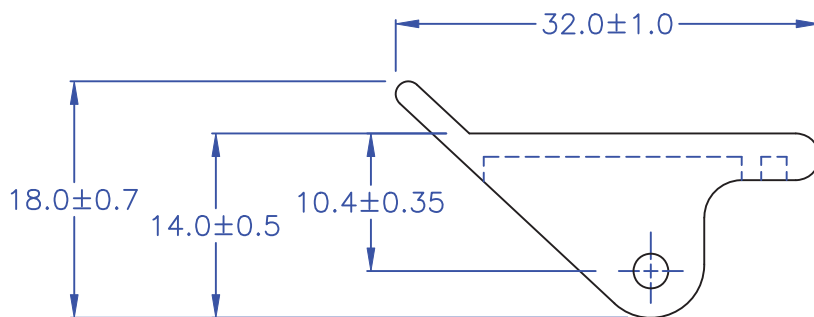

◎ HOLE IN P.C.B.:



Component - Plastics [\[guide info\]](#)

E I DUPONT DE NEMOURS & CO INC

ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 80713, WILMINGTON DE 19880-0713

101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)

Polyamide 66 (PA66), "Zytel", furnished as pellets

E41938

Color	Min Thk (mm)	Flame Class	HW	HAI	RTI Elec	RTI imp	RTI Str
ALL	0.71	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comparative Tracking Index (CTI): 0

Dielectric Strength (KV/mm): 13

High-Voltage Arc Tracking Rate (HYR): 0

Dimensional Stability (%): -

Inclined Plane Tracking (IPT): -

Volume Resistivity (10⁸ ohm-cm): 14

High Volt. Low Current Arc Resis (D495): 6

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C

(r9) - Virgin and regrind up to 50% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.71mm. For thickness 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTIs for all properties and Regrind exceeding 25% is limited to V-2 flammability for WF, RD, BK.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" for Zytel or "MIN" for Minlon or "DEL" for Delrin or "ORA" for Crastin or "RYN" for Rynite or "EPV" for ETPV or "SCR" for Sorona grades.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contexts. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1995-07-29

Last Revised: 2015-04-05

© 2015 ULL LLC



◎Halogen Free 低鹵

◎ROHS 2.0

◎ROHS 六項 compliant

TOLERANCE:

L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

APPROVED BY	Joly	2017.11.10
REVIEWED BY	Jaob	2017.11.10
DRAWN BY	Dian	2017.11.10
MATERIAL:	N66 V2 or EQUIVALENT	
COLOR:	NATURAL	



品固企業股份有限公司
品基電子(東莞)有限公司
蘇州品基電子科技有限公司
東莞市鑽隆商貿有限公司
PINGOOD ENTERPRISE CO.,LTD.

PART NAME:

拉柄

CIRCUIT BOARD EJECTOR

PART NO:

CP-15-Z

A
SIZE

VERSION
1A

SHEET 1 OF 1

UNIT	SCALE
mm	

表單號碼QF135