
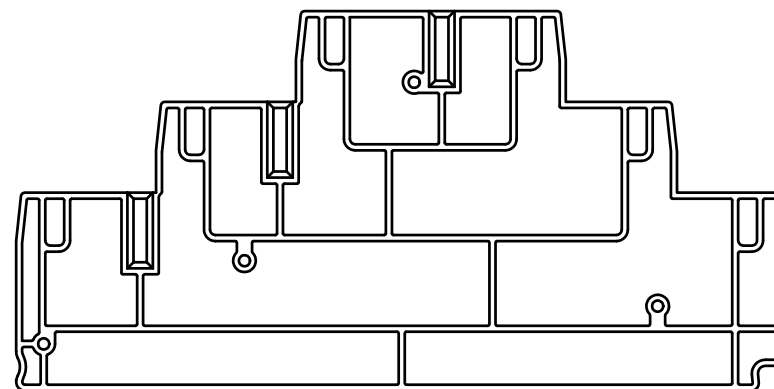
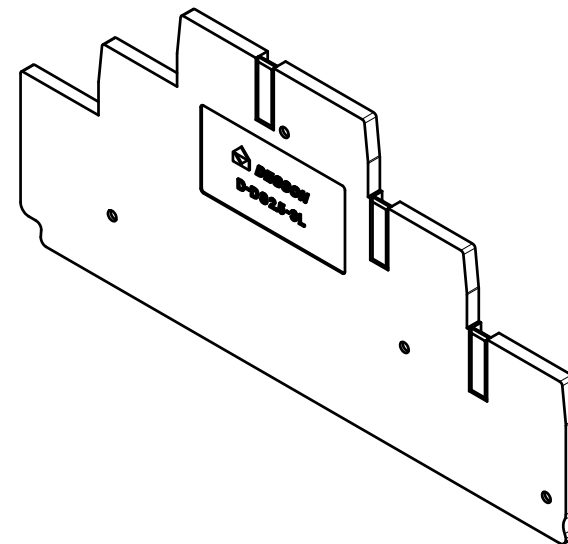


未注公差/General tolerances(mm)													 0.1/10  $\pm 2^\circ$	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500		>500
± 0.12	± 0.18	± 0.22	± 0.26	± 0.31	± 0.37	± 0.57	± 0.80	± 0.93	± 1.05	± 1.15	± 1.60	± 2.20		± 2.50

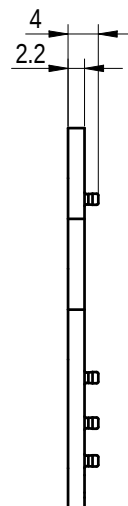

间距/Pitch(mm)/线数范围/Poles	2.2/01P
使用温度范围/Operating temperature(°C)	-40~+105
符合 RoHS 环保要求/Conform to RoHS	Yes
阻燃等级/Flame class	UL94V-0

		MATERIAL: A63RV0-1102		SURFACE/COLOR:	
		MAT NO./REV: 11060000298-1 / 00		MAT STATUS: 批量	
APPD: 李根劳	2023.02.27	NAME			
CHKD: 马恩开	2023.02.27	D-DS2. 5-3L-01P-1Y-00A&Z(H)			
DRFT: 岑乔枫	2023.02.27	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
		200153894	CUSTOMER DRAWING	work	2:1
		SHEET			
		1/1			

00		/	岑乔枫	2023.02.27
REV	ECN	DESCRIPTION	DRFT	DATE