

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUL. 05' 05
B		MODIFY P/N	MAR. 11' 08

Specifications:

Electrical characteristics:

Dielectric Withstanding Voltage : AC 1000V r.m.s
Insulation Resistance : 5000 Megohms Minimum.
Contact REsistance : 30 Millohms Maximum.
Operating Temperature : -55°C TO +125°C

Mechanical Characteristics:

Contact insertion Force : 4.5Kg Maximum.
Contact separator Force : 0.3Kg Minimum.



Materials:

Insulator : PBT UL 94V-0 Rated
Color : K=Black ; G=Green

Shell : STEEL

Finishes:

Shell : TIN Plated over Nickel

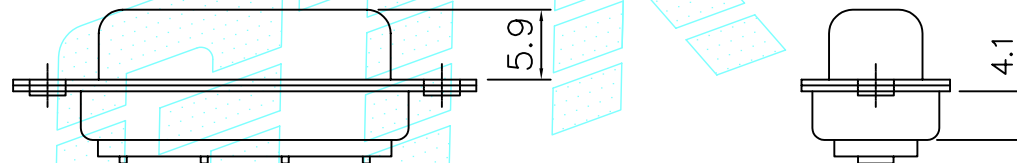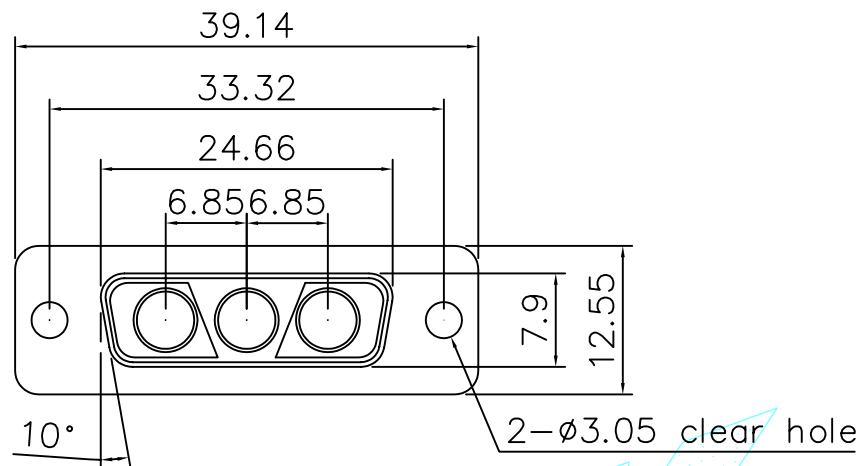

TOLERANCE UNLESS OTHERWISE SPECIFIED		
LINEAR	ANGLE	
X. ± 0.50	X° ±	
.X ± 0.25	.X° ±	
.XX ± 0.15	.XX° ±	
.XXX±	.XXX° ±	
APPD		
CHKD		
DRAW	Z.	MAR. 11' 2008

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
D-SUB COAXIAL
HOUSING 3W3P TYPE

CPART NO.

PART NO.
DA3W3SS0*N/KEY/RH

CAD NO. I268
F:\Drw\DSUB\DSUB-0096

SHEET
1 OF 1

圖面編號:GTKSD1529-B(1)