

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. Violation is prohibited. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，本公司保留所有权利。未经许可，不得复制或传播。

FOR-1755 Rev.2.1

2

3




4

5

6

未注公差/General tolerances(mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

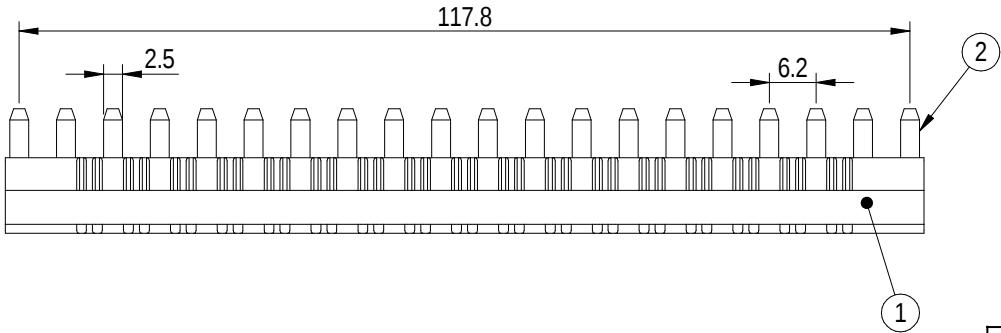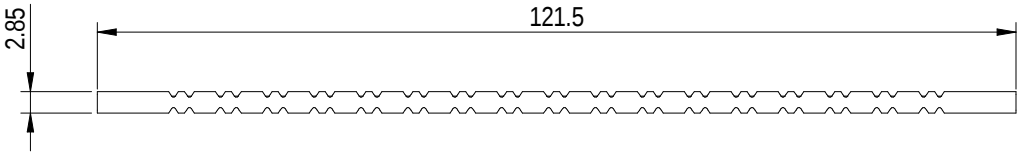

2	Current_carrier	Copper	/
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

间距/Pitch(mm)/线数范围/Poles	6.2/N=20P
使用温度范围/Operating temperature(°C)	-40~+85
符合 RoHS 环保要求/Conform to RoHS	Yes
XX 仅表示颜色 (12: 蓝; 13: 黑; 16: 红) XX represents color only (12:Blue;13:Black;16:Red)	

		MATERIAL:		SURFACE/COLOR:					
APPD: LGL		2024.06.06		MAT NO./REV:		/ 00		MAT STATUS: 批量	
CHKD: MEK		2024.06.06		NAME DBA20-6-XX-00Z (H)					
DRFT: GXJ		2024.06.06							
DRAWING NO.		TYPE		DRAWING STATUS		SCALE		SHEET	
200286065		CUSTOMER DRAWING		未发布		2:1		1/1	

00		The first release	GXJ	2024.06.06
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6