
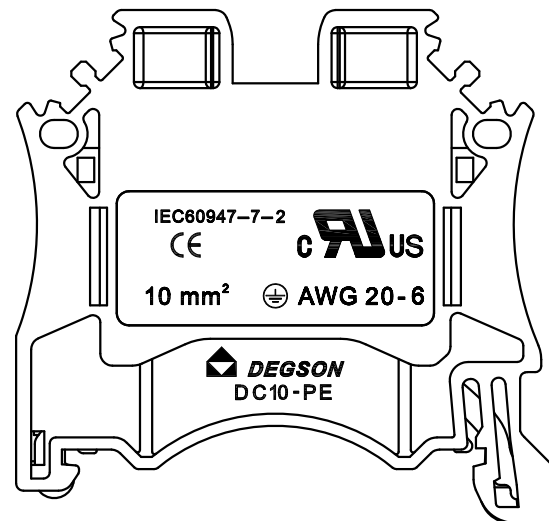
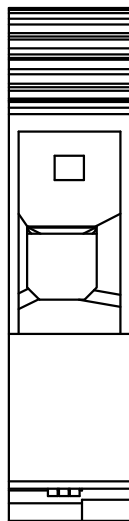
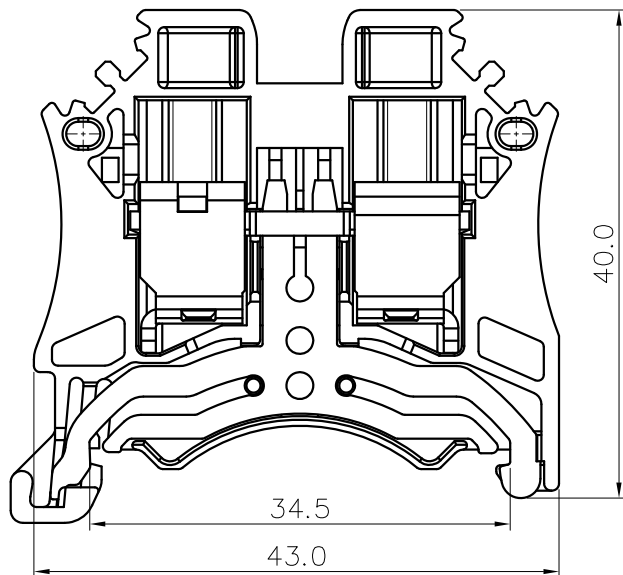


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

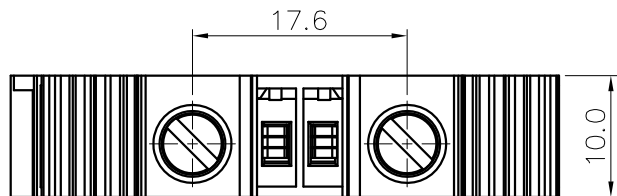

NOTES1:

UL Standard

1.Torque value : M4 , 14Lb.in

2.Wire range : 20~6AWG

IEC Standard

1.Torque value : M4 , 1.5N·m

2.Wire range : 0.5~10mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 10.0mm, Poles : N=01P

3.Stripping length : 10~12mm

4.Operating temperature: -40°C~+105°C

5.Undimensioned tolerances:

Pitch Range In		Nominal Dimension Range							0.1/10
mm									
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150				
TO 6	TO 10	TO 30	TO 60	TO 100	TO 150				
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30		±2°

6.RoHS Compliance

DC10-PE - 01P - 1C - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)
C.(Yellow and green)

DETACHED LISTS	PART NO.:	/				宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME: DC10-PE-01P-1C-00A(H)			
	CHKD:	/				TITLE: CUSTOMER DRAWING			
	DRFT:	/				DRAWING NO.: /		REV	DO
THIRD ANGLE PROJECTION		MM (INCH)		DO NOT SCALE DRAWING		SHEET 1/1		SCALE 1:1	