
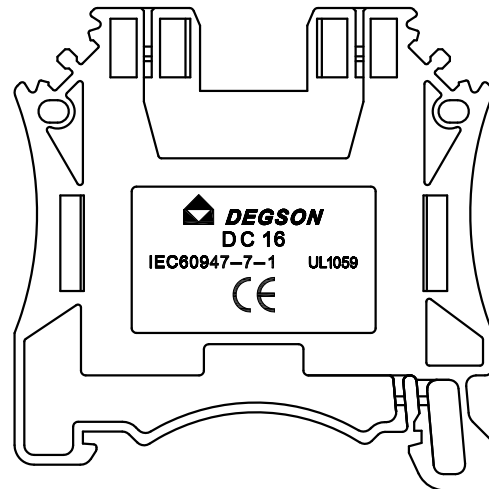
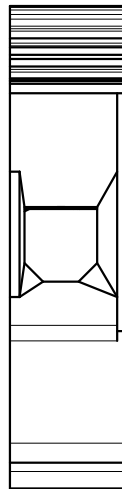
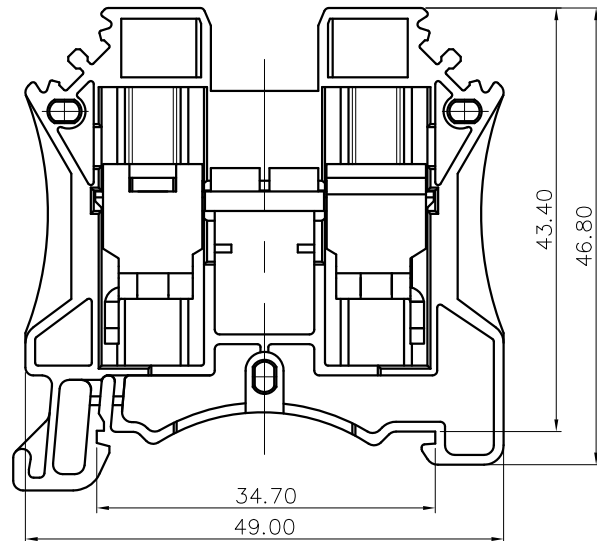


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

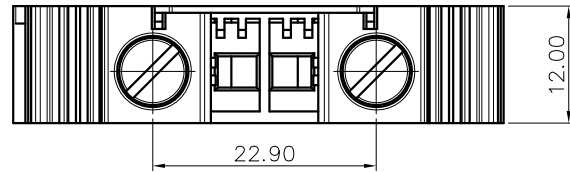

NOTES1:

UL Standard

- 1.Rated voltage/current : 600V / 100A
- 2.Withstanding voltage : AC2200V/1Min.
- 3.Torque value : M5 , 27Lb.in
- 4.Wire range : 14~3AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8KV
Rate voltage(V)	1000V
Rate current(A)	76A

- 2.Torque value : M5 , 2.5N·m
- 3.Wire range : 1.5~25mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 12mm, Poles : N=01P
- 3.Stripping length : 12~13mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch Range In mm		Nominal Dimension Range In mm						
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150			0.1/10
TO 10	TO 24	TO 60	TO 100	TO 150				≤
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30		±2°

6.RoHS Compliance

DC16 - 01P - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)
(RoHS)
00A-(Standard)

DETACHED LISTS	PART NO.:	/				宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME: DC16-01P-1Y-00A(H)			
	CHKD:	/				TITLE: CUSTOMER DRAWING			
	DRFT:	/				DRAWING NO.: /		REV	DO
	THIRD ANGLE PROJECTION		MM (INCH)		DO NOT SCALE DRAWING		SHEET	1/1	SCALE