



UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/12	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级 /Pollution Degree	III/3		
额定电压/电流/Rated	500/6.3		
额定脉冲电压(KV)/Rate Impulse	6		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.5		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	20~10/0.5~4,6(Sol)		
间距/Pitch(mm)/线数范围/Poles	8.0/N=01P		
剥线长度/Stripping length(mm)	9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

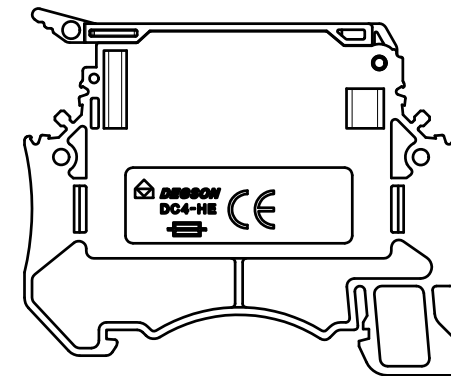

5	Cage	Steel	M3/Zn plated
4	Clamp	Copper	Sn plated
3	Screw	Steel	M3/Zn plated
2	Body Housing	PA66	UL94V-0
1	Fuse Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

 DEGSON		MATERIAL:		SURFACE/COLOR:	
		MAT NO./REV: /		MAT STATUS: 批量	
APPD: 彭敏	2023.12.11	NAME DC4-HE-01P-1Y-00Z(H)			
CHKD: 高卫国	2023.12.11				
DRFT: 邓梁	2023.12.11	DRAWING NO. 200260735	TYPE CUSTOMER DRAWING	DRAWING STATUS work	SCALE 1:1
 A4	 (inch)	SHEET 1/1			

00		由CAD TO版升级图框为SE 00版	邓梁	2023.12.11
REV	ECN	DESCRIPTION	DRFT	DATE