

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violators will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经许可擅自复制或传播, 否则禁止转让、复制、利用、交还本文件的内容, 一经发现将追究法律责任。 本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.3

2

3

4


5

6



38

Printing Black

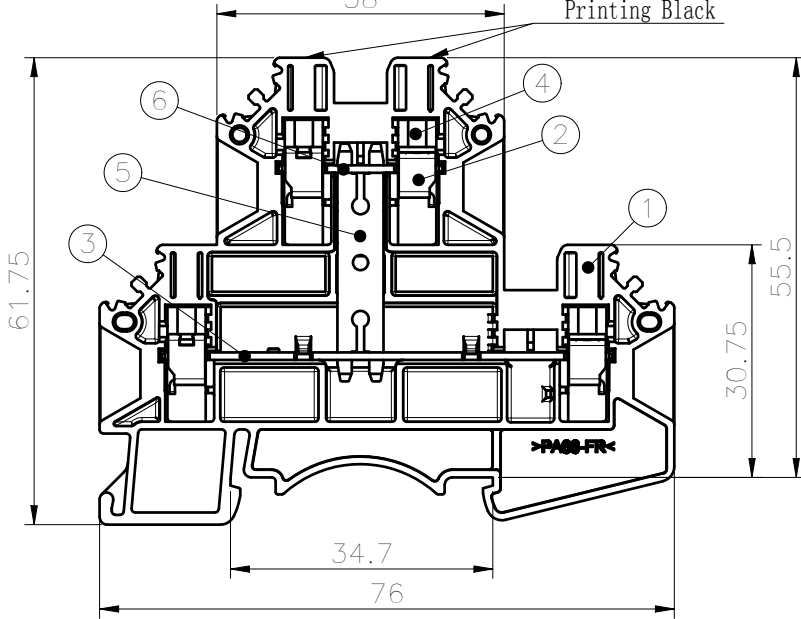


61.75

55.5

34.7

76

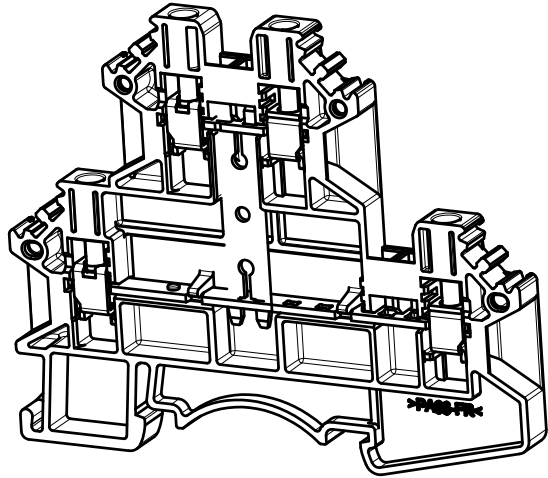


5.1



未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

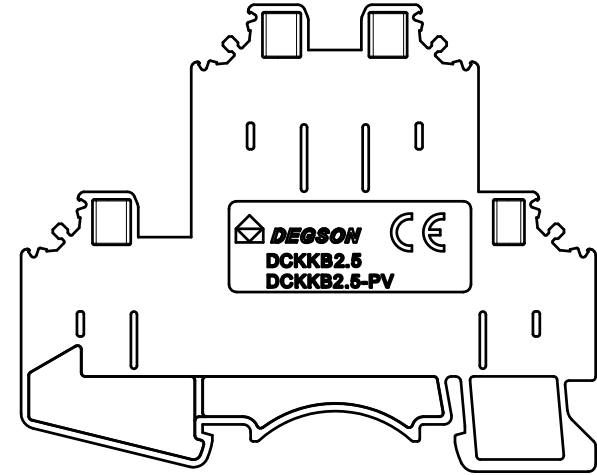

6	Current_carrier	Copper	Sn Plated
5	Top_bottom_Bridge_piece	Copper	Sn Plated
4	Screw	Steel	M2.5/Zn plated
3	Long_current_carrier	Copper	Sn Plated
2	Cage	Steel	M2.5/Zn plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:			
额定电压/电压/Rated Voltage(V)/Current(A)	R	C	D
300V/20A	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	500V/24A	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M2.5, 0.4/3.6		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	26~12 / 0.5~2.5&4 SOL		
间距/Pitch(mm)/线数范围/Poles	5.1/N=01P		
剥线长度/Stripping length(mm)	8~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

			MATERIAL: /		SURFACE: /		
			MAT NO./REV: /		MAT STATUS: 批量		
APPD: Peng M			NAME				
CHKD: Gao WG			DCKKB2. 5-PV-01P-1Y-00A&Z (H) ①				
DRFT: Chen KZ							
2022. 11. 2			DRAWING NO.		TYPE		
2022. 11. 2			200072774		CUSTOMER DRAWING		
A4					DRAWING STATUS		
					/		
					SCALE		
					1: 1		
					SHEET		
					1/1		

01	/	Update part name	Chen KZ	2022.11.2
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6