

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密、企业名称、商号、域名、其他知识产权等权利外，其他权利均归本公司所有。未经许可，不得复制或传播。

FOR-1755 Rev.1.7

2

3



4

5

6

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

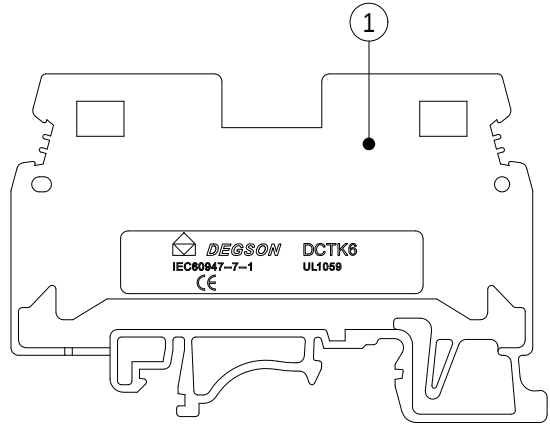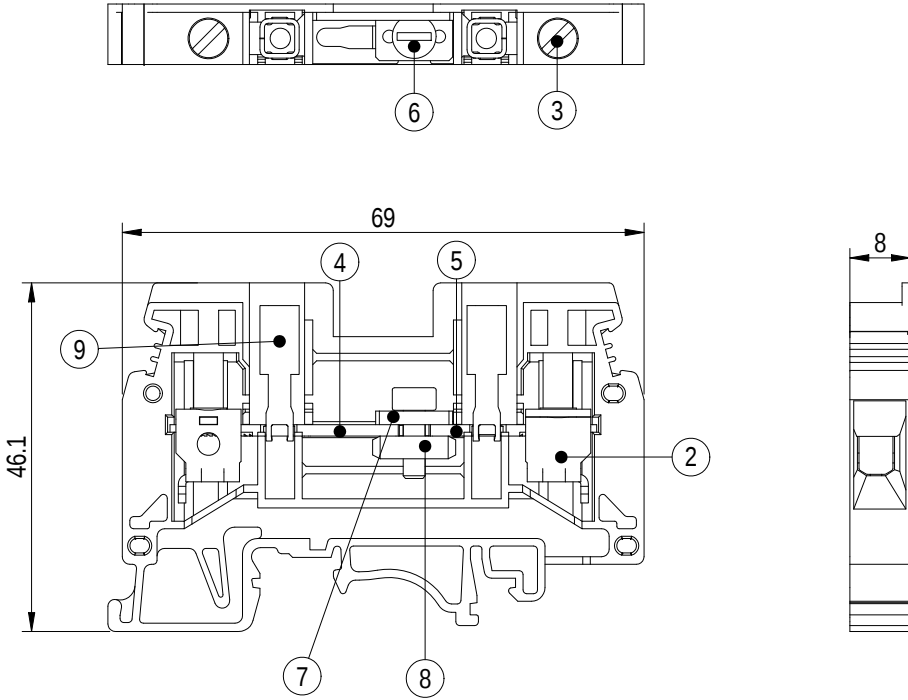

9	Sleeve	Copper	Sn Plated
8	Cage-3	Copper	Sn Plated
7	Cage-2	Steel	Zn Plated
6	Screw-2	Steel	Zn Plated
5	Current carrier-Short	Copper	Sn Plated
4	Current carrier-Long	Copper	Sn Plated
3	Screw-1	Steel	Zn Plated
2	Cage-1	Steel	Zn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

00		NEW DRAWING	Liu Y	2023.05.19
REV	ECN	DESCRIPTION	DRFT	DATE



APPD:	Peng M	2023.05.19
CHKD:	Gao WG	2023.05.19
DRFT:	Liu Y	2023.05.19

⊕	⊖	A4	⊕	⊖	(inch)
---	---	----	---	---	--------

额定电压/电流/Rated Voltage(V)/Current(A)	300/45	300/45	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	630/41	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M4, 1.6/14		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.6/5.3		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	0.5~10 / 20~8		
间距/Pitch(mm)/线数范围/Poles	8/N=01P		
剥线长度/Stripping length(mm)	12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

MATERIAL: /	SURFACE/COLOR: /
MAT NO./REV: 11020000302-1 / 00	MAT STATUS: 小批量

NAME	DCTK6 N-01P-11-00A&Z(H)		
------	-------------------------	--	--

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200105485	CUSTOMER DRAWING	/	1:1	1/1