



REV	ECN	ND.	DESCRIPTION	DATE
A			RELEASE	SEP. 14. 99
B			REDRAW	DEC. 27. 05

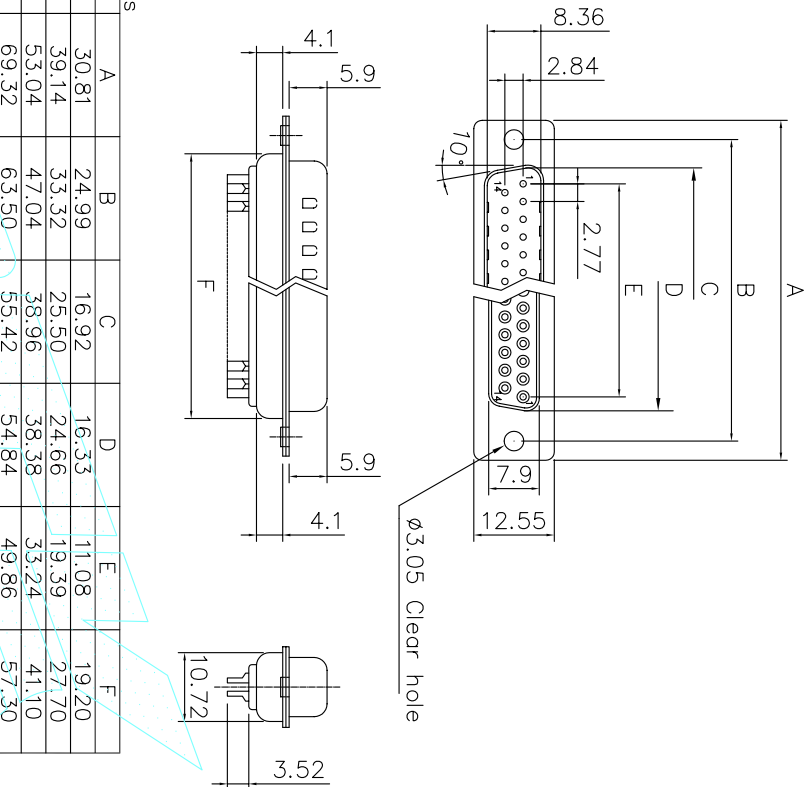

Dimensions	A	B	C	D	E	F
Positions	9	30.81	24.99	16.92	16.33	11.08
	15	39.14	33.32	25.50	24.66	19.39
	25	53.04	47.04	38.96	33.24	41.10
	37	69.32	63.50	55.42	54.84	57.30

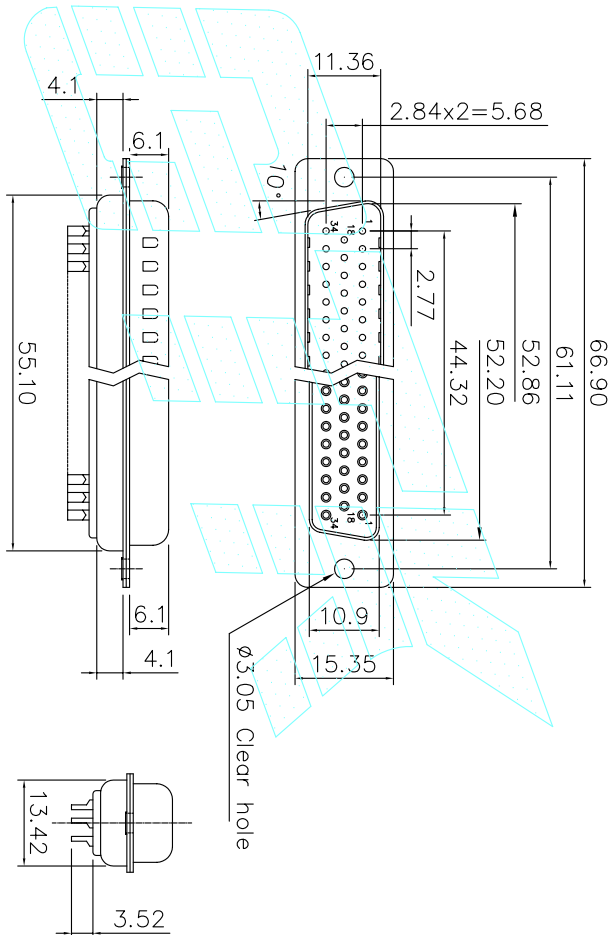

50 Positions

Product Specification
Material :Glass-Filled Thermoplastic PBT,UL94V-0 rated
Insulator :Brass or Phosphor Bronze
Contact :Brass or Phosphor Bronze
Shell :T=Steel, 100u" Tin Over 50u" min Nickel.
C=Chromated Shell
Clinch Nut: Brass, 100u" min Nickel Plated.
Boardlock :Brass, 100u" min Nickel Plated.
Screwlock :Brass, 100u" min Nickel Plated.
Electrical
Contact Resistance :20 milliohms Max at 1 AMP DC.
Insulation Resistance :1000 magohms at 500 VDC
Dielectric Withstanding Voltage : 1000 VAC/rms 60Hz for 1 minute
Current Rating :5 AMP
Volatge Rating :250 VAC/rms 60Hz

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION		GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE	UNITS		PART NO. D*****N*S/RH	
X. ± 0.3	X° ± 3°	MM		CAD NO. 1268	
.X ± 0.25	.X° ± 1°			SHEET	
.XX ± 0.13	.XX° ±			1 OF 1	
.XXX±	.XXX ±	SCALE		F:\Drtw\DSUB\DUSB-0106	
APPD				CPART NO.	
CHKD		SIZE	圖面編號:GTKSD0450-B(1)		
DRAW	Tao. Tao.	A4			
DEC. 27. 2005					

RoHs Compliant

GOLD-TEK ELECTRIC CO., LTD.