


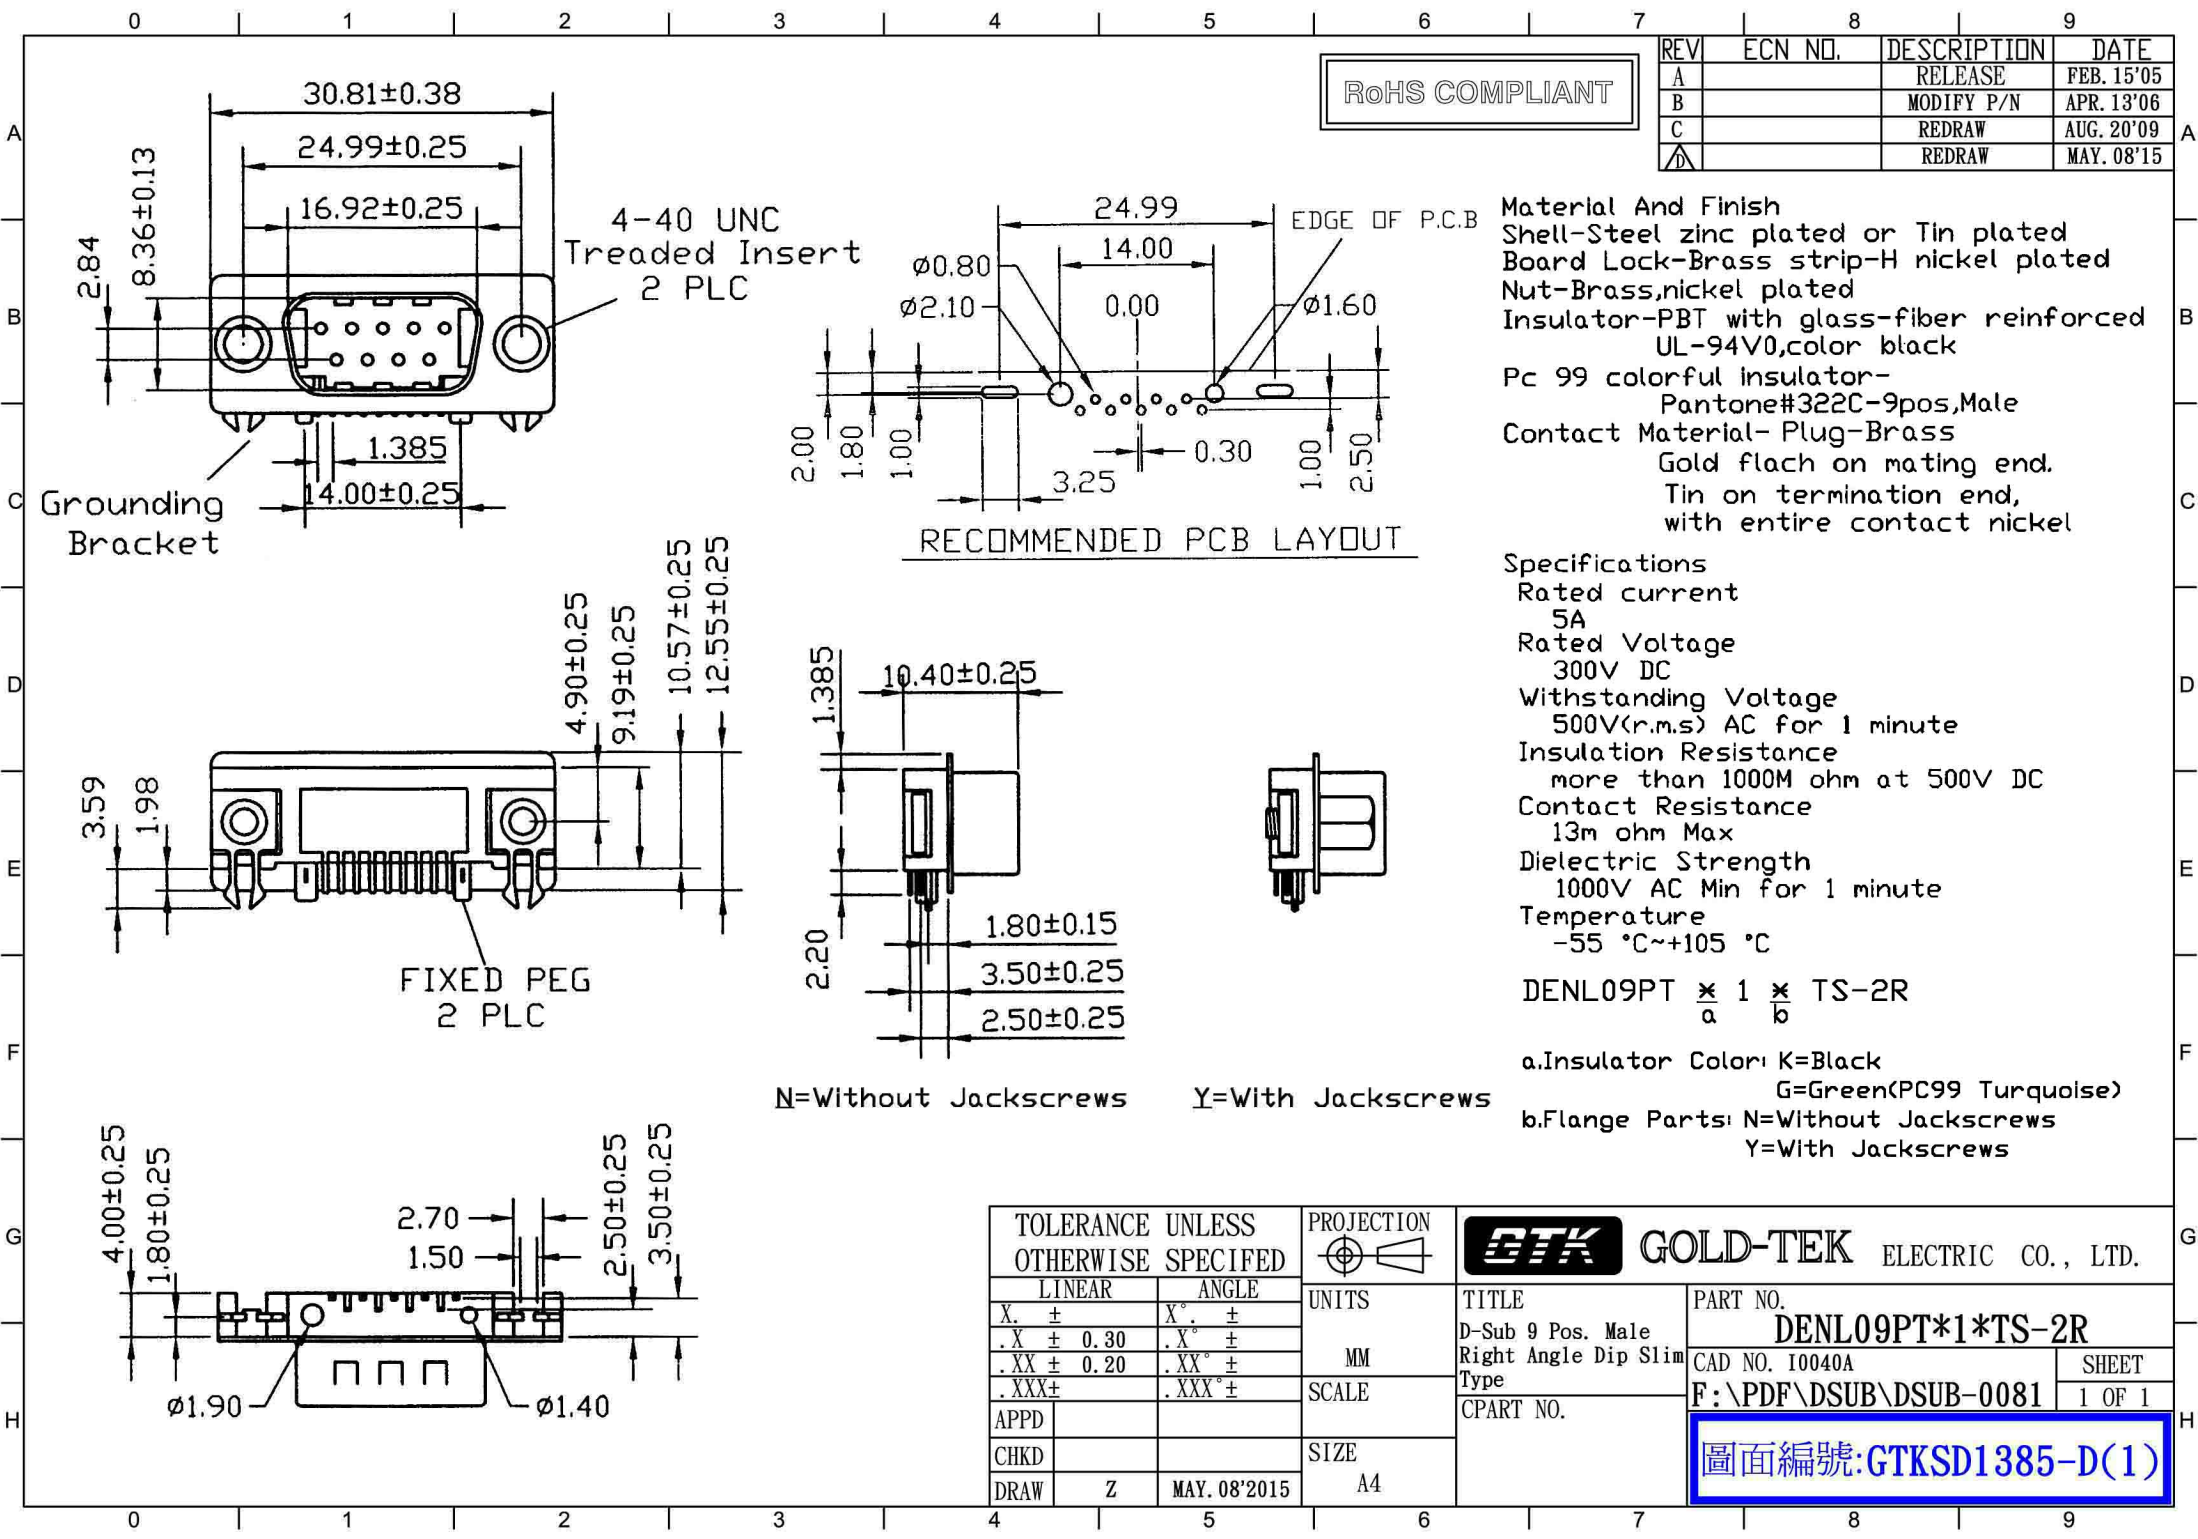

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	FEB. 15'05
B		MODIFY P/N	APR. 13'06
C		REDRAW	AUG. 20'09
Δ		REDRAW	MAY. 08'15

Material And Finish
Shell-Steel zinc plated or Tin plated
Board Lock-Brass strip-H nickel plated
Nut-Brass,nickel plated
Insulator-PBT with glass-fiber reinforced
UL-94V0,color black
Pc 99 colorful insulator-
Pantone#322C-9pos,Male
Contact Material- Plug-Brass
Gold flach on mating end.
Tin on termination end,
with entire contact nickel

Specifications
Rated current
5A
Rated Voltage
300V DC
Withstanding Voltage
500V(r.m.s) AC for 1 minute
Insulation Resistance
more than 1000M ohm at 500V DC
Contact Resistance
13m ohm Max
Dielectric Strength
1000V AC Min for 1 minute
Temperature
-55 °C~+105 °C

DENL09PT $\times \frac{1}{a}$ $\times \frac{1}{b}$ TS-2R
a.Insulator Color: K=Black
G=Green(PC99 Turquoise)
b.Flange Parts: N=Without Jackscrews
Y=With Jackscrews

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE	UNITS	TITLE	
X. ±	X° ±		D-Sub 9 Pos. Male Right Angle Dip Slim Type	
.X ± 0.30	.X° ±	MM	PART NO. DENL09PT*1*TS-2R	
.XX ± 0.20	.XX° ±		CAD NO. 10040A	
.XXX±	.XXX° ±	SCALE	F:\PDF\DSUB\DSUB-0081	
APPD		SIZE A4	CPART NO.	
CHKD			SHEET 1 OF 1	
DRAW	Z	MAY. 08'2015	圖面編號:GTKSD1385-D(1)	