


## **HOW TO ORDER:**



Model: DG126-5.0

Capability	
Rated voltage/Rated current	300V/10A
Wire range	26-14 AWG, 1.5 mm <sup>2</sup>
Withstanding voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20 mΩ
Temp. Range	-40°C~+105°C
MAX Soldering	+250°C for 5 Sec
Torque	0.4Nm (3.6Lb.in)
Strip length	6-7 mm
Specification	
Housing	PA66, UL94V-0
Screws	M2.5, steel, Zinc plated
Wire guard	Stainless steel
Pin header	Brass, Tin plated

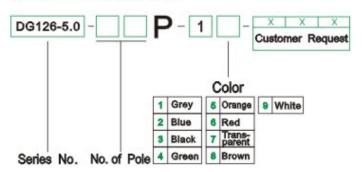