










03P




02P



05P

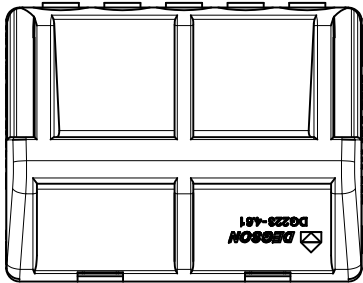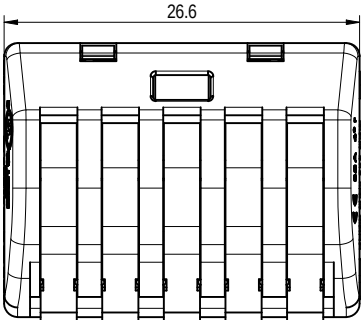

正公差/General tolerances (mm)													0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10 ±2°
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	
UL 标准/UL Standard:														
额定电压/Rated Voltage(V)													600	
VDE标准/VDE Standard:														
过压类别/Overvoltage Category/污染等级/Pollution Degree													III/3	II/2
额定电压/电流/Rated Voltage(V)/Current(A)													/	450/24
IEC 标准/IEC Standard:														
过压类别/Overvoltage Category/污染等级/Pollution Degree													III/3	II/2
额定电压/电流/Rated Voltage(V)/Current(A)													/	450/32
工频耐压/Withstanding Voltage(V/1Min)													AC2500	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)													28~12 / 0.2~2.5.4(sol)	
间距/Pitch(mm)/线数范围/Poles													4.61/N=02、03、05P	
剥线长度/Stripping length(mm)													9~10	
使用温度范围/Operating temperature(°C)													-40~+105	

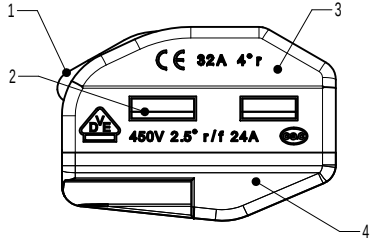

Note:
The A&Z(H) in the name means: A(H) and Z(H).

5	Spring	Stainless steel	/
4	Housing	PA66	UL94V-0
3	Cover	PA66	UL94V-0
2	Current carrier	Copper	Sn Plated
1	Button	PA66-GF	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DEGSON		MATERIAL: /		SURFACE/COLOR: /	
APPD: 兰泰华		MAT NO./REV: -		MAT STATUS: 批量	
CHKD: 陈超		NAME			
DRFT: 智学光		DRAWING NO.		TYPE	
DATE		200025172		CUSTOMER DRAWING	
REV		ECN		DRAWING STATUS	
00		DESCRIPTION		已发布	
REV		DATE		SCALE	
A3		200025172		2.5:1	
A3		200025172		1/1	