

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violators will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 未经许可，不得复制或传播本文件内容，否则将承担法律责任。侵权者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.4

2

3




4

5

6

未注公差/General tolerances(mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

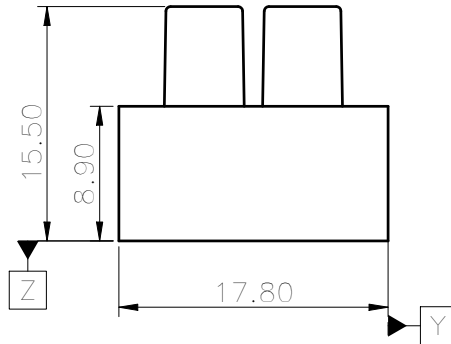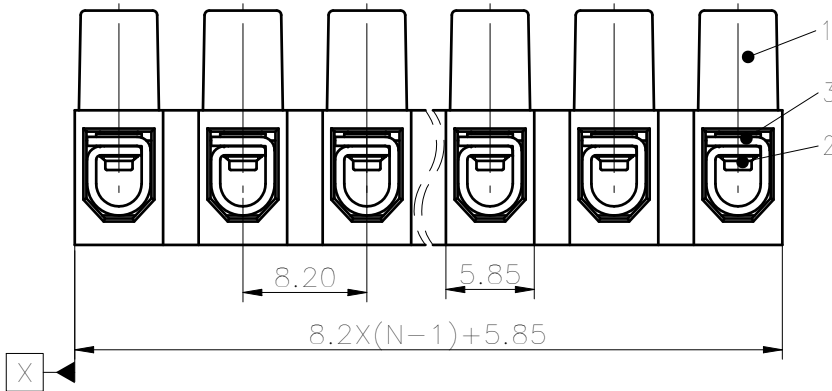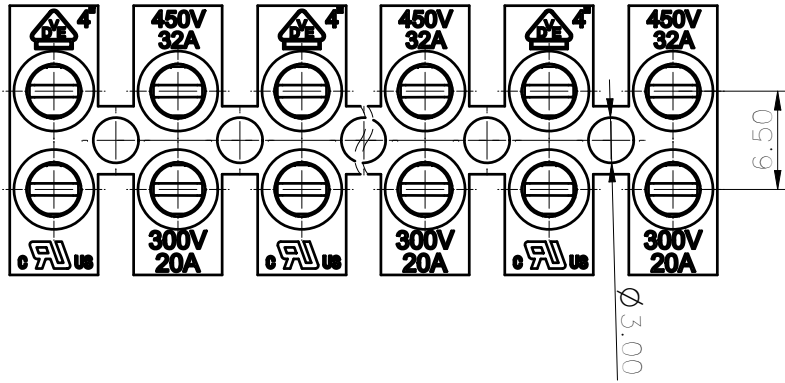

3	Current carrier	Steel	Zn plated
2	Screws	Steel	Zn Plated/M2.5
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300V/20	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	450/32	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M2.5: 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	20~12 / 0.5~4.0		
间距/Pitch(mm)/线数范围/Poles	8.20/N=02~12P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求/Conform to RoHS	Yes		

		MATERIAL: 材质		SURFACE/COLOR: 表面处理	
		MAT NO./REV: 物料编码 / 版本		MAT STATUS: 物料状态	
APPD: 核准人	核准日期	NAME			
CHKD: 审核人	审核日期	DG8HS-1.2-XXP-1Y-120A&Z(H)			
DRFT: SKH	2022.04.26	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
	A4	图号	图纸类型	图纸状态	2:1
					SHEET
					1/1

图纸版本	ECN	变更描述	设计人	设计日期
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6