




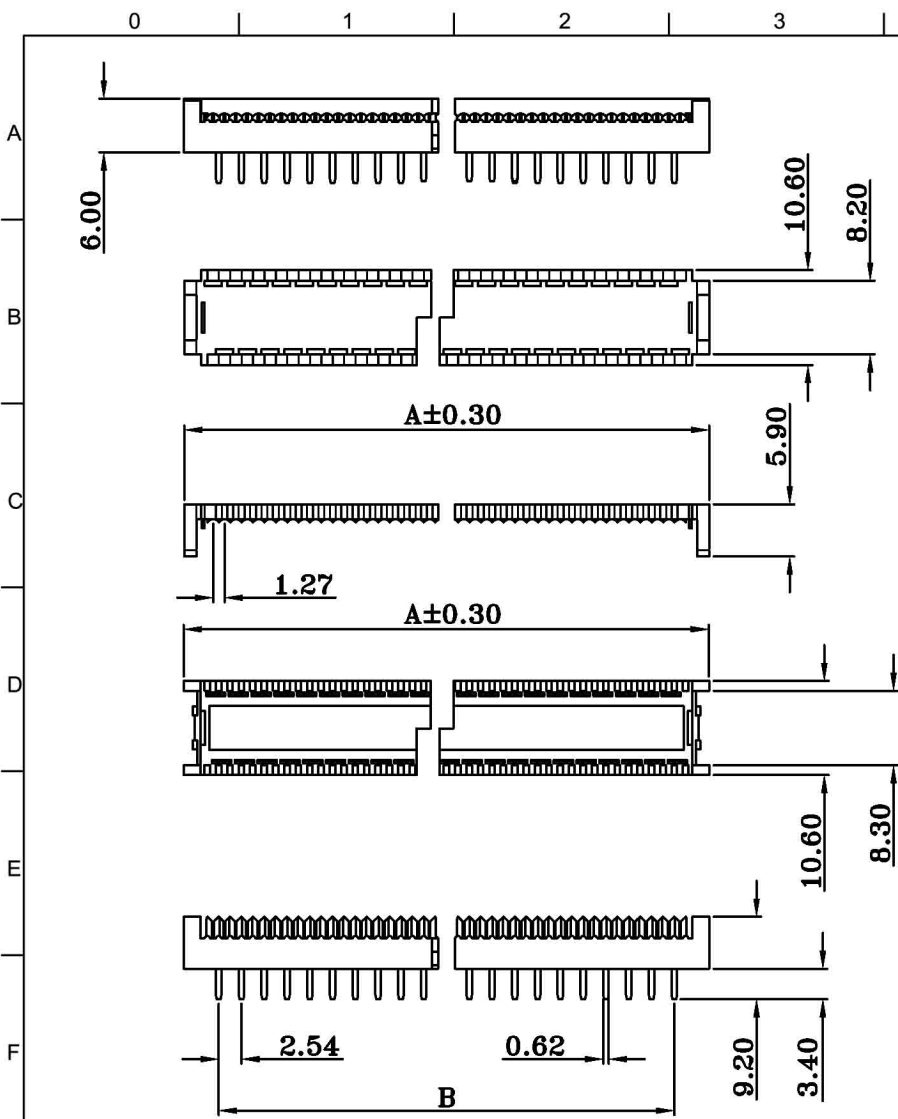


RoHS COMPLIANT


REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUN. 21'05
B		MODIFY P/N	AUG. 02'11
△		ADD. GRAY	NOV. 05'15

MATERIALS:
 INSULATOR:P.B.T.30%GLASS FIBER,UL94V-0,
 COLOR:BLACK (-GR = GRAY)
 CONTACT MATERIAL:BRASS OR PHOSPHOR BRONZE,
 GOLD FLASH OVER NICKEL

ELECTRICAL:
 CURRENT RATING:1AMP DC
 INSULATION RESISTANCE:5000MΩ MIN.
 CONTACT RESISTANCE:30mΩ MAX.
 DIELECTRIC WITHSTANDING:1000V AC
 OPERATING TEMPERATURE:-40°C~+105°C
 TERMINATED WITH 1.27mm PITCH FLAT RIBBON CABLE.

CONTACTS	A	B
08P	15.45	07.62
10P	17.95	10.16
14P	23.05	15.24
16P	25.50	17.78
18P	28.12	20.32
20P	30.68	22.86
24P	35.80	27.94
28P	40.81	33.02
40P	56.15	48.26

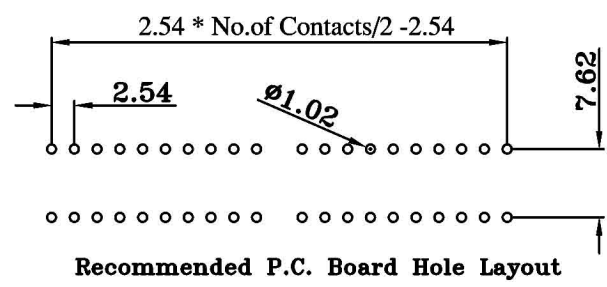

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION 	 GOLD-TEK ELECTRIC CO., LTD.		
LINEAR		ANGLE	UNITS MM	TITLE Dip Plug 2.54x7.62mm	PART NO. DP**TW1(-GR)	
X. ± 0.50	X°. ±	CAD NO. I0104A			SHEET	
.X ± 0.35	.X°. ±					
.XX ± 0.25	.XX°. ±					
.XXX±	.XXX°. ±					
APPD		SCALE	CPART NO.	F:\PDF\PH\PH-0234		
CHKD		SIZE	A4	圖面編號:GTKSD1512-C(1)		
DRAW	Z	NOV. 05'2015				