


尺寸公差(mm)					0.05/10 ±T
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	


额定电流/Rated current	10A
额定电压/Rated voltage	300V
线圈/触点介电耐压/Coil/Contact dielectric voltage	3000V/S
触点间介电耐压/Dielectric voltage between contact	2500V/S
螺钉扭矩/Screw torque	1.0Nm
外连接导线/External connection wire	20-14/0.5-2.5W G/mm ²
环境温度/Ambient temperature	-40~+65℃
重点管控符号/Key controlled symbol	*
符合RoHS环保要求/Conform to RoHS	

印字为激光打标, 印字内容清晰、无断线等/Printing for laser marking, printing content is clear, no broken line, ect

印字面按图中脚位参考/Seal literal reference according to the foot position in the drawing

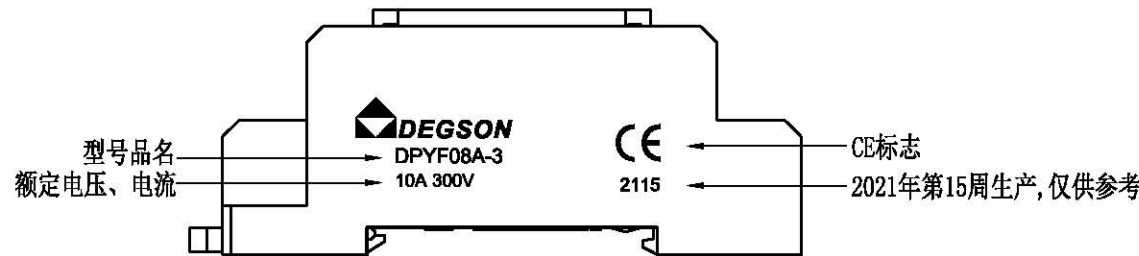

备注: 1个产品配有2个附件, 如下图所示;



MATERIAL:	/	SURFACE:	/
MAT.NO.:	30020000045	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	Description:	
APPD:		DPYF08A-3-00Z(H)	
CHKD:		DRAWING NO.:	200069531
DRFT:	Huang XS 2022.04.27	REV:	00
SIZE:	A4	TYPE:	COUSTOMER DRAWING
SCALE:	1:1	SHEET:	1/1

REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs, registrations, trademarks and other intellectual property rights. 未经授权, 禁止复制或传播, 否则将承担法律责任。 未经授权, 禁止复制或传播, 否则将承担法律责任。