

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交寄本文档的内容。侵犯者将承担法律责任。 实用新型和外观设计的所有权利。

FOR-1753 Rev.1.2






2

3

4

5

6

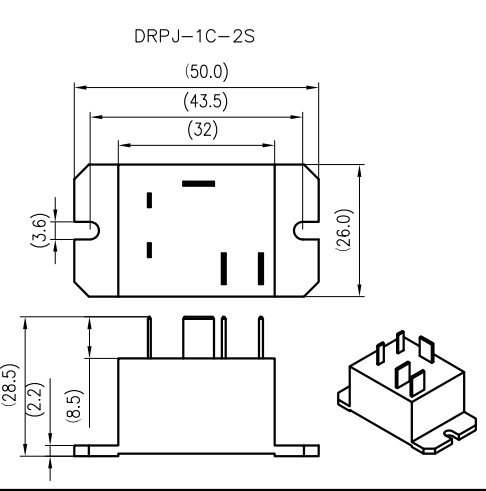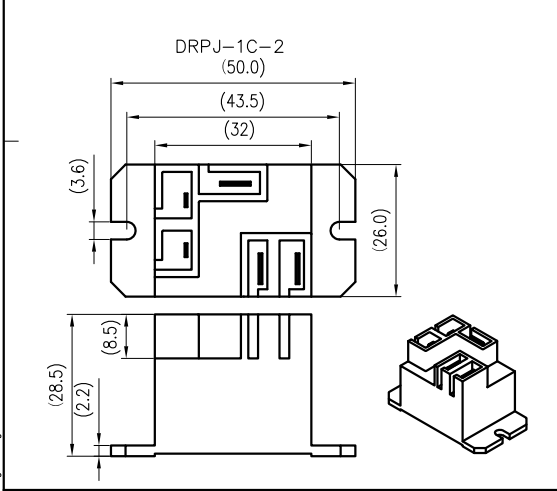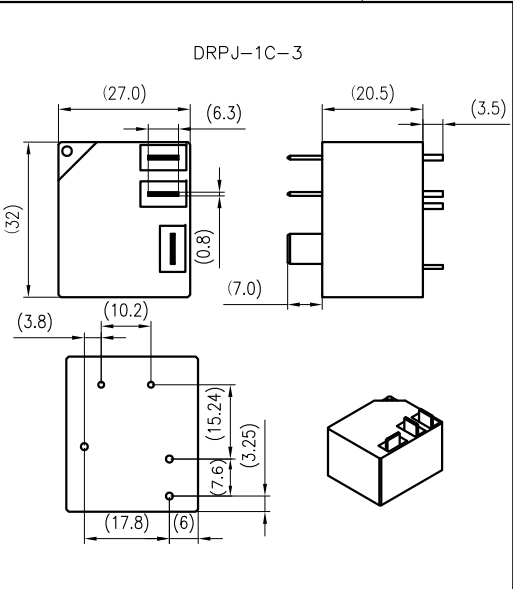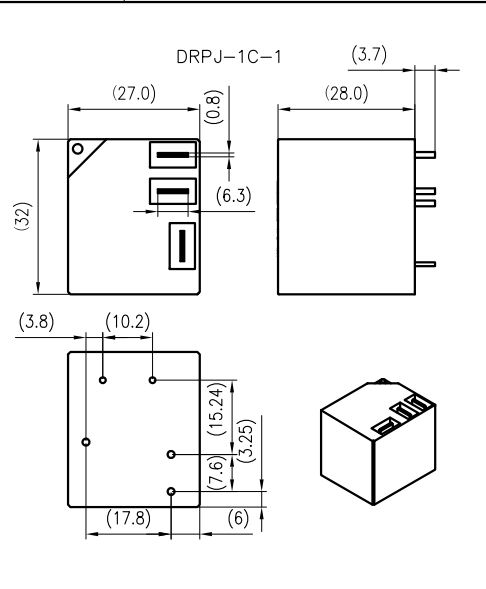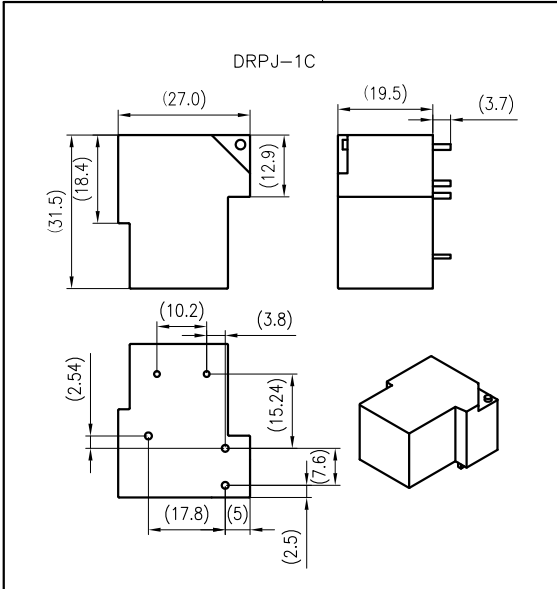

订货型号举例	型号品名	线圈规格
DRPJ-1C-D5-02A&ZH	DRPJ-1C-D5	5VDC
DRPJ-1C-D12-02A&ZH	DRPJ-1C-D12	12VDC
DRPJ-1C-D24-02A&ZH	DRPJ-1C-D24	24VDC
DRPJ-1C-D48-02A&ZH	DRPJ-1C-D48	48VDC
DRPJ-1C-1-D5-02A&ZH	DRPJ-1C-1-D5	5VDC
DRPJ-1C-1-D12-02A&ZH	DRPJ-1C-1-D12	12VDC
DRPJ-1C-1-D24-02A&ZH	DRPJ-1C-1-D24	24VDC
DRPJ-1C-1-D48-02A&ZH	DRPJ-1C-1-D48	48VDC
DRPJ-1C-2-D5-02A&ZH	DRPJ-1C-2-D5	5VDC
DRPJ-1C-2-D12-02A&ZH	DRPJ-1C-2-D12	12VDC
DRPJ-1C-2-D24-02A&ZH	DRPJ-1C-2-D24	24VDC
DRPJ-1C-2-D48-02A&ZH	DRPJ-1C-2-D48	48VDC
DRPJ-1C-2S-D5-02A&ZH	DRPJ-1C-2S-D5	5VDC
DRPJ-1C-2S-D12-02A&ZH	DRPJ-1C-2S-D12	12VDC
DRPJ-1C-2S-D24-02A&ZH	DRPJ-1C-2S-D24	24VDC
DRPJ-1C-2S-D48-02A&ZH	DRPJ-1C-2S-D48	48VDC
DRPJ-1C-3-D5-02A&ZH	DRPJ-1C-3-D5	5VDC
DRPJ-1C-3-D12-02A&ZH	DRPJ-1C-3-D12	12VDC
DRPJ-1C-3-D24-02A&ZH	DRPJ-1C-3-D24	24VDC
DRPJ-1C-3-D48-02A&ZH	DRPJ-1C-3-D48	48VDC

尺寸公差(mm)					0.05/10 ±1°
0 ~30	>30 ~60	>60 ~100	>100 ~150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	

负载电流/Load current	1C:30A
负载电压/Load voltage	240VAC/28VDC
电气寿命/Electrical life	≥100,000
机械寿命/Mechanical life	≥10,000,000
接触电阻/Contact resistance	≤100mΩ(24V,1A)
吸合电压/Operate voltage	DC<75%Ue
释放电压/Release voltage	DC>10%Ue
重点管控符号/Key controlled symbol	*
使用温度范围/Operating temperature(°C)	-55~+75
介质耐压/Dielectric strengths	触点与触点间 1800VAC,1Min(1mA)
	线圈和触点间 2500VAC,1Min(1mA)
线圈消耗功率/Coil operating power	DC: 0.93W/AC: 1.5VA
线圈最大允许电压/Max. allowable coil voltage	110%(额定电压Ue)
符合RoHS环保要求/Conform to RoHS	

公司LOGO打标高度/Mark the height of the company LOGO

“CE”标识打标高度/Mark the height of the “CE”

“UL”标识打标高度/Mark the height of the “UL”

型号品名打标字体及字高/Ttpe name marking font and word height



线圈规格打标字体及字高/Coil specification marking font and word height

电流、电压规格及脚位标识打标字体及字高/Current、voltage specification and foot position marking font and word height

印字为激光打标, 印字内容清晰、无断线等/Printing for laser marking,printing content is clear ,no broken line,ect

印字面按图中脚位参考/Seal literal reference according to the foot position in the drawing

图中虚线框内印字与下方列表相对应/The words in the dotted box correspond to the list below

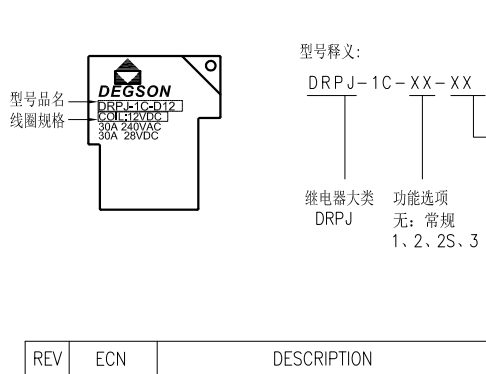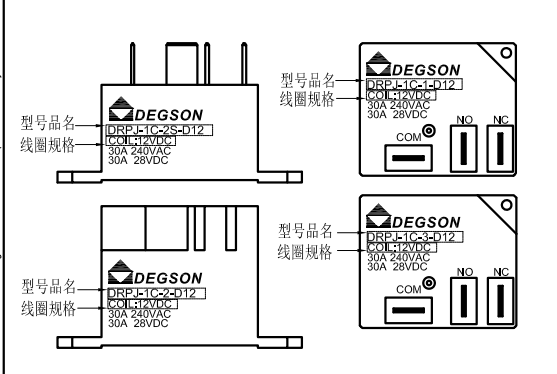


型号释义:

DRPJ-1C-XX-XX

继电器大类: DRPJ

功能选项: 无: 常规, 1、2、2S、3

线圈电压: D12; D24 A24; A48

MATERIAL: /		SURFACE: /	
MAT.NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD:			
CHKD:			
DRFT: long ZM 2021.6.7		Description: DRPJ-XX-XX-XX-02A&Z(H)	
DRAWING NO.: 940000037		REV	TO-1
	SIZE: A4		TYPE: PRODUCT DRAWING
SCALE: 1:1		SHEET	1/1