




REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

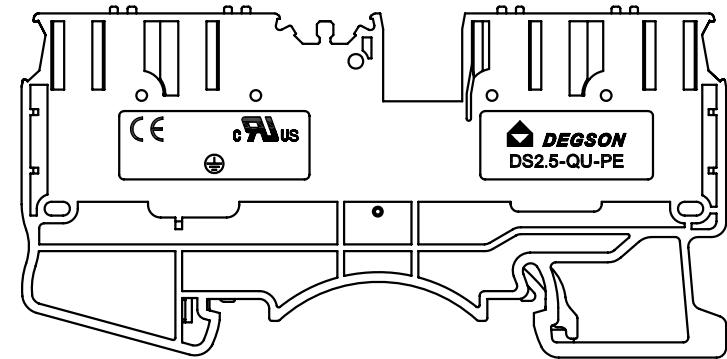

DS2.5-QU-PE - 01P - 1C - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color):C.(Yellow-Green)
(RoHS)
00A-(Standard)

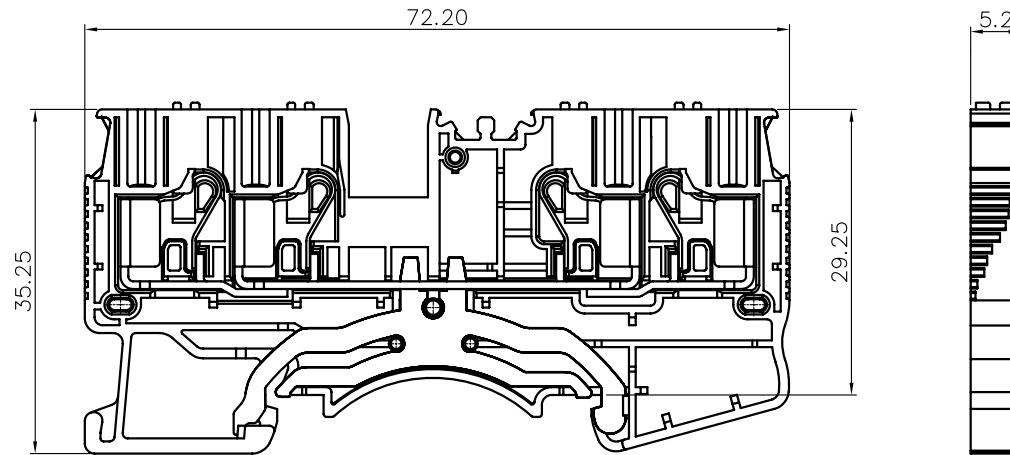

NOTES1:

UL Standard

1.Wire range : 26~12AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV

2.Wire range : 0.2~2.5mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 5.2mm, Poles : 01P

3.Stripping length : 9~10mm


4.Operating temperature: -40°C~+105°C

5.Standard color number:RAL7040

6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm							
	Over 6	Over 10		Over 30	Over 60	Over 100	Over 150		0.1/10
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150			<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

7.RoHS Compliance

DETACHED LISTS	PART NO.: /		 宁波高松电子有限公司 NINGBO DEGSN ELECTRICAL CO., LTD			
	APPD: /		NAME: DS2.5-QU-PE-01P-1C-00A(H)			
	CHKD: /					
	DRFT: /		TITLE: CUSTOMER DRAWING		REV	DO
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET	1/1
			 MM (INCH) DO NOT SCALE DRAWING		SCALE	1:1