

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violators will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经许可擅自复制或传播, 否则禁止转让、复制、利用、交还本文件内容, 一经发现将追究法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.3

2

3




4

5

6



2

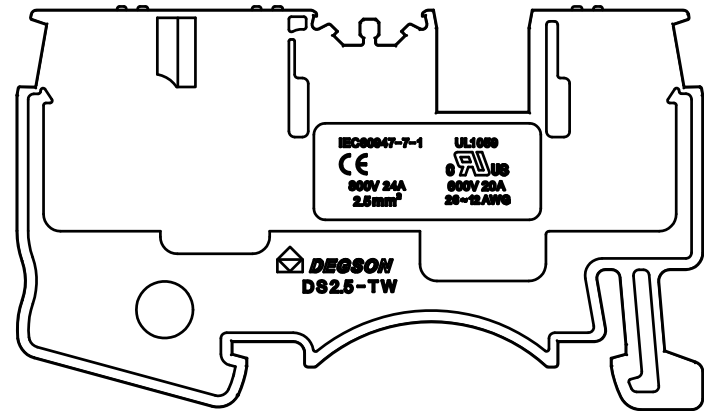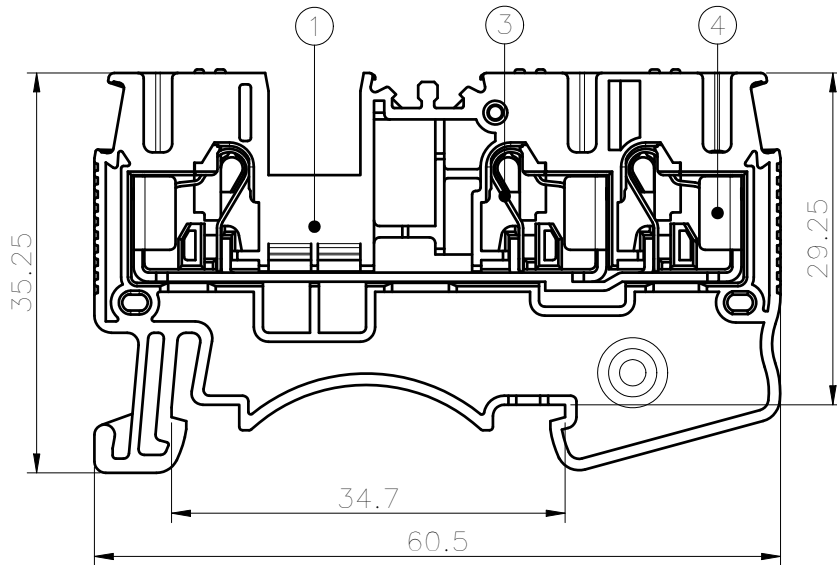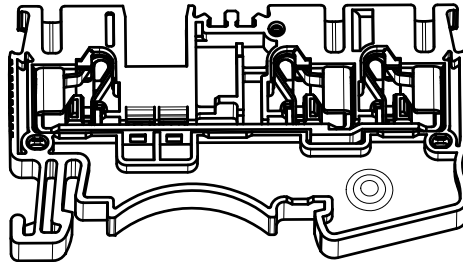

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL 标准/UL Standard:

额定电压/电流/Rated Voltage(V)/Current(A)	B	C	D
	600/20	600/20	600/5

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
---	-------	---	---

额定电压/电流/Rated Voltage(V)/Current(A)	800/24	/	/
-------------------------------------	--------	---	---

额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
-------------------------------------	-----	---	---

线径范围/硬线和软线/Wire Range(rigid and flexible)(AWG/mm ²)	0.2~2.5&4(SOL)/26~12		
---	----------------------	--	--

间距/Pitch(mm)	5.2		
--------------	-----	--	--

剥线长度/Stripping length(mm)	10~12		
---------------------------	-------	--	--

使用温度范围/Operating temperature(°C)	-40~+105		
----------------------------------	----------	--	--

符合 RoHS 环保要求/Conform to RoHS	Yes		
------------------------------	-----	--	--

标准颜色编号/Standard color number: PANTONE / RAL	/		
---	---	--	--

4	Current carrier	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94 V-0
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:		SURFACE:	
		MAT NO./REV: 11040000035-1 / 00		MAT STATUS: 批量	
APPD: 李根芳	2021.08.23	NAME DS2.5-TW-01P-11-00A&Z(H)			
CHKD: 马恩开	2021.08.20				
DRFT: 米帅	2021.08.20				
 A4		DRAWING NO. 200006187	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 1.5:1
		SHEET 1/1			