
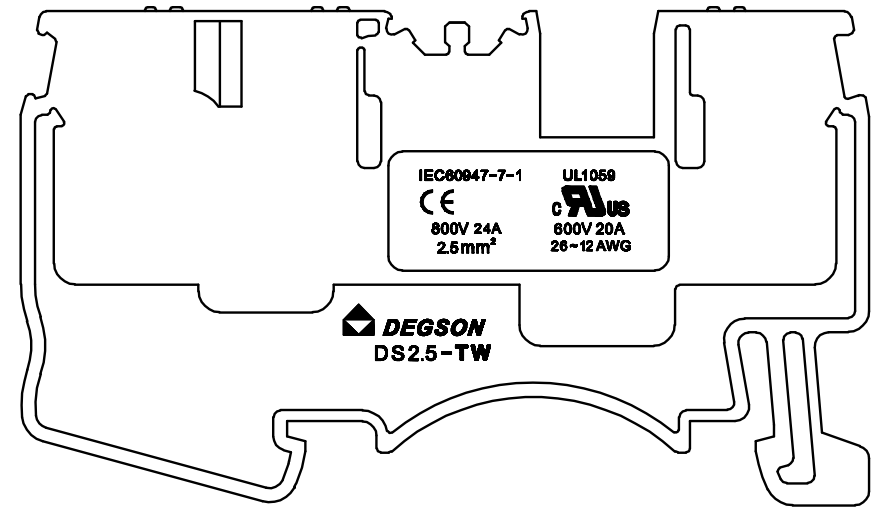


未注公差/General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
3	6	10	18	30	50	80	120	180	250	315	400	500	±0.12
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

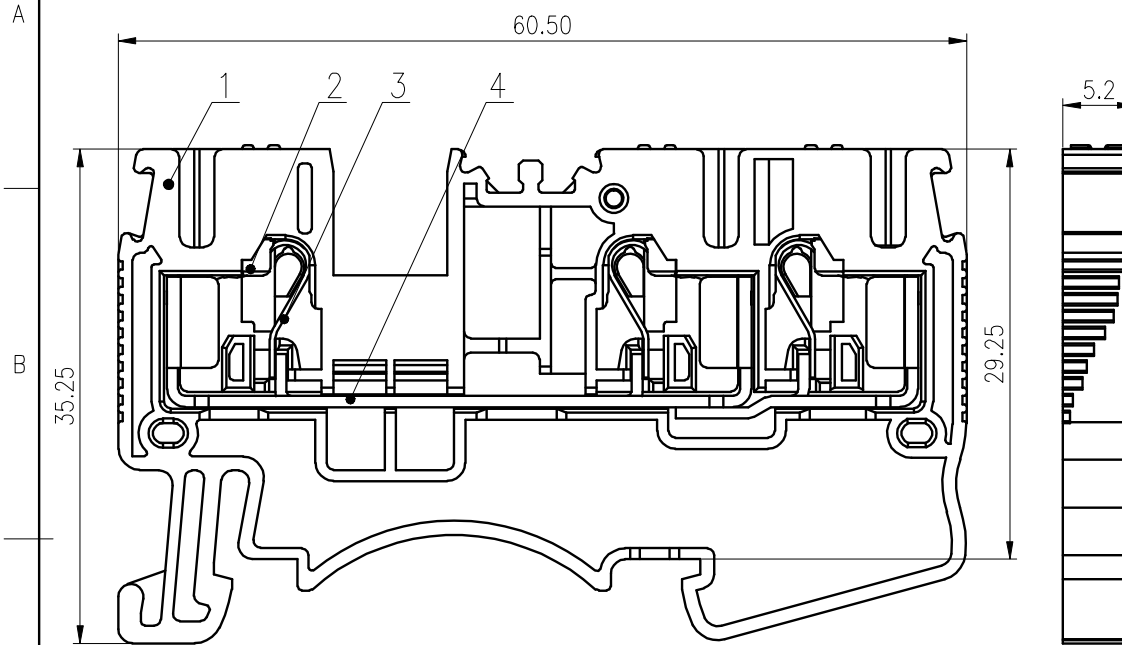

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/20	600/20	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	800/24	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~2.5&4(SOL)/26~12		
间距/Pitch(mm)	5.2		
剥线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	PANTONE / RAL		

4	Current carrier	Copper	Sn Plated
3	Spring	Stainless steel	
2	Button	PA66-GF	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

MATERIAL: /	SURFACE: /		
MAT NO.: /			
STATUS: /			
APPD: Li GL 2020.04.02	NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
CHKD: Mao J 2020.04.02	DS2.5-TW-01P-1Y-00A(H)		
DRFT: Huangs 2019.09.19	DRAWING NO.: DS2.5-TW-C01	REV	T1
④ ③	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1
mm (inch)		SHEET	1/1


目录 CONTENTS

弹片系列—DS直插式 Spring series—DS Push-in Type



1.5 mm ² DS 直插式连接端子	Push-in connection terminal blocks	03-06
2.5 mm ² 抽屉式接线端子	Drawer Terminal Block	07-08
2.5 mm ² DS 直插式连接端子	Push-in connection terminal blocks	09-14
4 mm ² DS 直插式连接端子	Push-in connection terminal blocks	15-19
6 mm ² DS 直插式连接端子	Push-in connection terminal blocks	20-22
10 mm ² DS 直插式连接端子	Push-in connection terminal blocks	23-24
16 mm ² DS 直插式连接端子	Push-in connection terminal blocks	25-26

弹片系列—WS回拉式 Spring series—WS Spring Cage Type




1.5 mm ² WS 回拉式连接端子	Spring-cage connection terminal blocks	29-38
2.5 mm ² WS 回拉式连接端子	Spring-cage connection terminal blocks	39-53
4 mm ² WS 回拉式连接端子	Spring-cage connection terminal blocks	54-60
6 mm ² WS 回拉式连接端子	Spring-cage connection terminal blocks	61-64
10 mm ² WS 回拉式连接端子	Spring-cage connection terminal blocks	65-68
16 mm ² WS 回拉式连接端子	Spring-cage connection terminal blocks	69-72
35 mm ² WS 回拉式连接端子	Spring-cage connection terminal blocks	73-74

螺钉系列—DC钢螺钉式 Screw series—DC Steel Screw Type



2.5 mm ² DC 螺钉连接端子	Screw connection terminal blocks	77-80
4 mm ² DC 螺钉连接端子	Screw connection terminal blocks	81-83
6 mm ² DC 螺钉连接端子	Screw connection terminal blocks	84-86
10 mm ² DC 螺钉连接端子	Screw connection terminal blocks	87-88
16 mm ² DC 螺钉连接端子	Screw connection terminal blocks	89-90
35 mm ² DC 螺钉连接端子	Screw connection terminal blocks	91-92

螺钉系列—PC铜螺钉式 Screw series—PC Brass Screw Type




1.5 mm ² PC 螺钉连接端子	Screw connection terminal blocks	95-96
2.5 mm ² PC 螺钉连接端子	Screw connection terminal blocks	97-104
4 mm ² PC 螺钉连接端子	Screw connection terminal blocks	105-112
6 mm ² PC 螺钉连接端子	Screw connection terminal blocks	113-115
10 mm ² PC 螺钉连接端子	Screw connection terminal blocks	116-119
16 mm ² PC 螺钉连接端子	Screw connection terminal blocks	110-122
35 mm ² PC 螺钉连接端子	Screw connection terminal blocks	123-126
50 mm ² PC 螺钉连接端子	Screw connection terminal blocks	127-128
95 mm ² PC 螺钉连接端子	Screw connection terminal blocks	129-130

附件 ACCESSORIES131-136




Din Rail Terminal Blocks

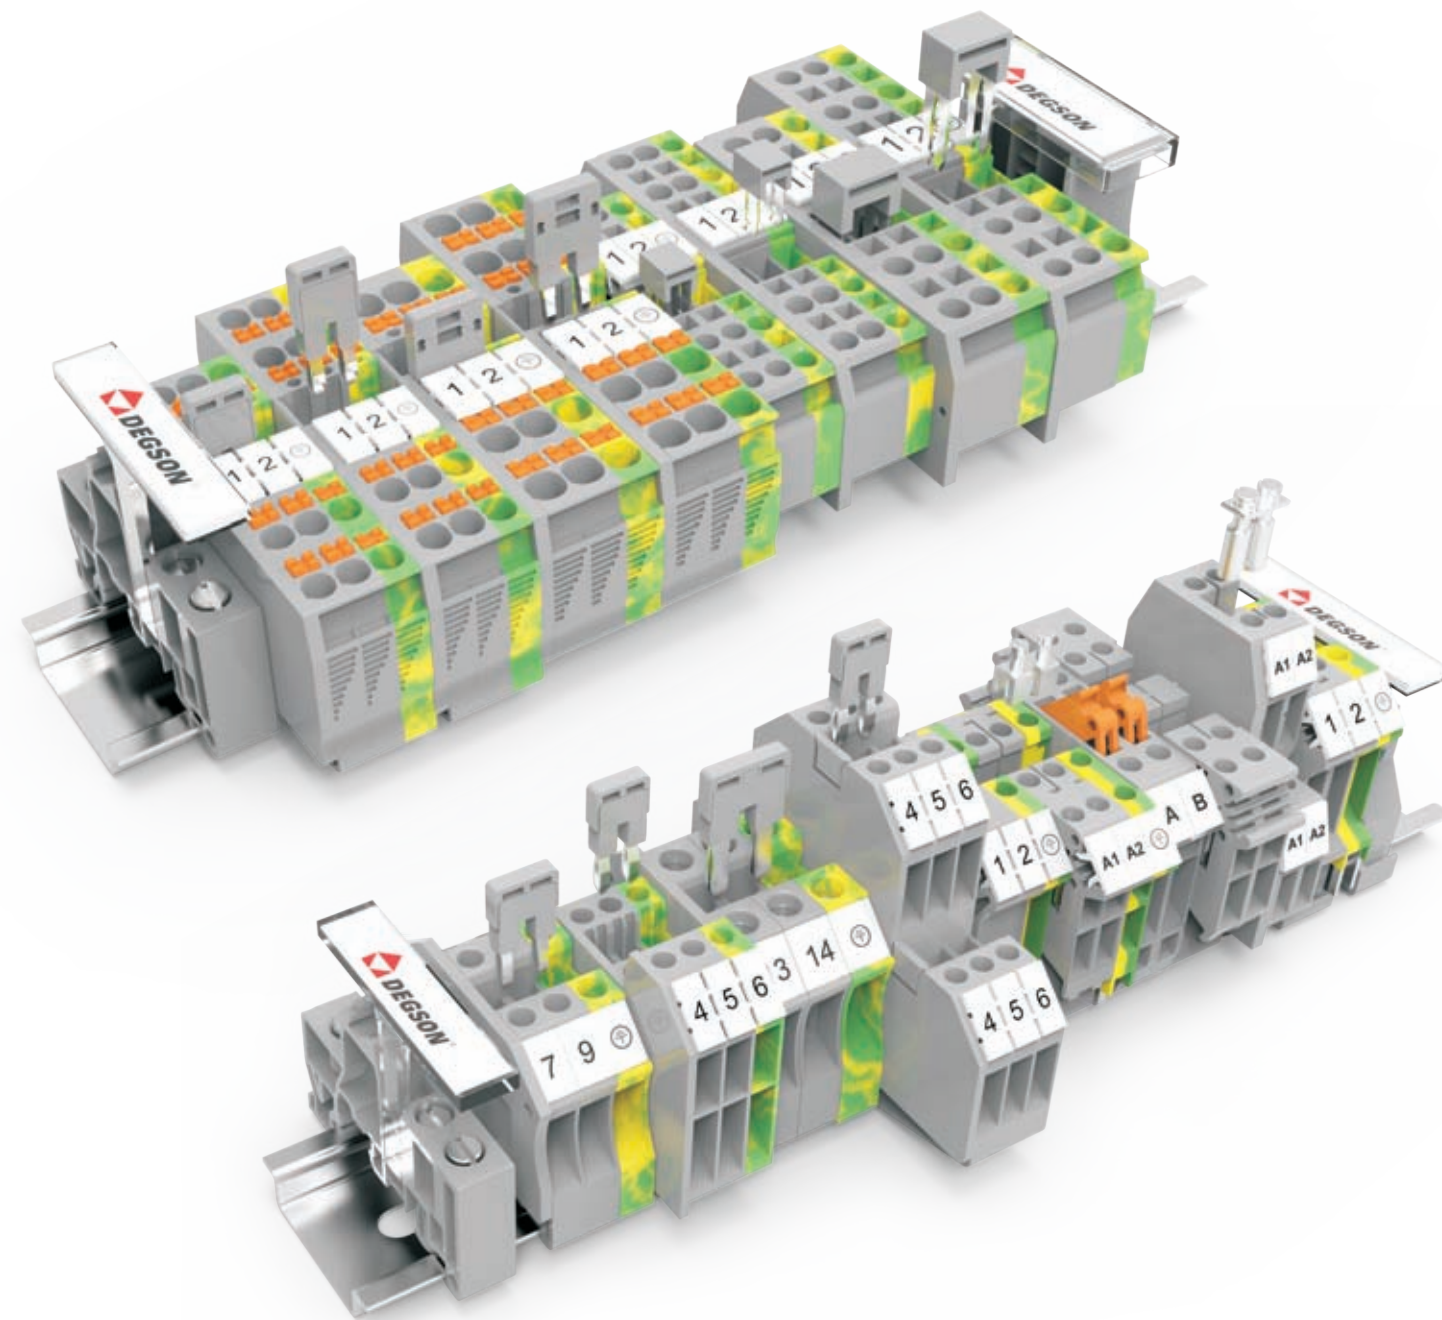

HOW TO ORDER

DS1.5	0	1	P	1	1	0	0	A(H)
Series No .	No .of Pole					Standard Products		
		1 Single pitch				1 Grey		
		2 Double pitch				2 Blue		
						3 Black		
						4 Green		
						5 Orange		
						6 Red		
						7 Transparent		
						8 Yellow		
						9 White		

EG:



DS2.5-01P-11-00A(H)



WS2.5-01P-11-00A(H)